



Somplan 380/Somplan 350

TECHNICAL DATA	STANDARD	SOMPLAN 380	SOMPLAN 350
CLASSIFICATION			
Type of Floorcovering	ISO 10581	Homogeneous	Homogeneous
Classification	ISO 10874	Classes:	Classes:
	Commercial	34	34
	Industrial	43	43

TECHNICAL CHARACTERISTICS			
Total thickness	ISO 24346	2.0mm	2.0mm
Dimension - Length	ISO 24341	231m	231m
Dimension - Width	ISO 24341	2m	2m
Total weight	ISO 23997	2850g/m²	3150g/m²
Surface treatment		TEKTANIUM™	TEKTANIUM™
Binder content	ISO 10581	Type I	Type II

TECHNICAL PERFORMANCES			
Dimensional stability	ISO 23999	≤ 0.40% (Rolls)	≤ 0.40% (Rolls)
Curl resistance to heat	ISO 23999	≤ 4.00mm	≤ 4.00mm
Reaction to fire	EN 13501-1	Bfl-s1	Bfl-s1
Residual indentation	ISO 24343-1 - measured value	≤ 0.03mm	≤ 0.03mm
	Required value	≤ 0.10mm	≤ 0.10mm
Castor chair test	ISO 4918 - EN 425	No damage	No damage
Thermal resistance	EN ISO 10456	0.04 (m²·K)/W	0.04 (m²·K)/W
Light fastness	ISO 105 B02	≥ 6	≥ 6
Chemical resistance	ISO 26987	Good resistance	Good resistance
Slip resistance	DIN 51130	R9	R9
Dynamic coefficient friction	EN 13893	μ≥ 0.3	μ≥ 0.3
Static electrical charge	EN 1815	≤ 2kV	≤ 2kV
Bacteria resistance	ISO 846-C	Doesn't favour growth	Doesn't favour growth
Flexibility	ISO 24344	20 mm – No crack	20 mm – No crack
Clean room	ISO 14644-1	ISO Class 2	-

ENVIRONMENT			
TVOC 28 days	ISO 16000	< 10ug/m³	< 10ug/m³
Recyclable		100%	100%
Plasticizer		Phthalate-free technology	Phthalate-free technology

The above information is subject to modification for the benefit of further improvement.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

Somplan380/350 Color	Welding rods	Somplan380/350 Color	Welding rods	Somplan380/350 Color	Welding rods	Somplan380/350 Color	Welding rods	Somplan380/350 Color	Welding rods
002	306019 102	017	306019 117	024	306019 124	030	306019 130	036	306019 136
004	306019 104	018	306019 118	025	306019 125	031	306019 131	037	306019 137
006	306019 106	019	306019 119	026	306019 126	032	306019 132	038	306019 138
008	306019 108	021	306019 121	027	306019 127	033	306019 133	039	306019 139
012	306019 112	022	306019 122	028	306019 128	034	306019 134	040	306019 140
016	306019 116	023	306019 123	029	306019 129	035	306019 135	041	306019 141



www.tarkett-asia.com
Contact: saleshk@tarkett.com

Tarkett

Tarkett

**Somplan 380
Somplan 350**

phthalate free
100%

ROLL

**HOMOGENEOUS COMPACT
VINYL FLOORCOVERING**

Somplan 380/Somplan 350

HOMOGENEOUS COMPACT VINYL FLOORCOVERING

Compact
Vinyl
solution for
heavy-traffic
areas

Tarkett




HIGH QUALITY HOMOGENEOUS VINYL FLOORING

Somplan 380/Somplan 350 is a homogeneous vinyl
floorcovering suitable for heavy traffic in premises such
as healthcare facilities and other commercial areas

- Key features:**
- NEW! TEKTANIUM™ Improved PU Performance
 - High resistance to wear, compression, stain and bacteria
 - Phthalate-free plasticizers for people's health and safety
 - Extremely low TVOC emission ensuring high indoor air quality
 - Available in 30 elegant colours combined with soft textures to provide a peaceful atmosphere

Somplan 380/Somplan 350


□ Somplan 380 306036 --
■ Somplan 350 306007 --

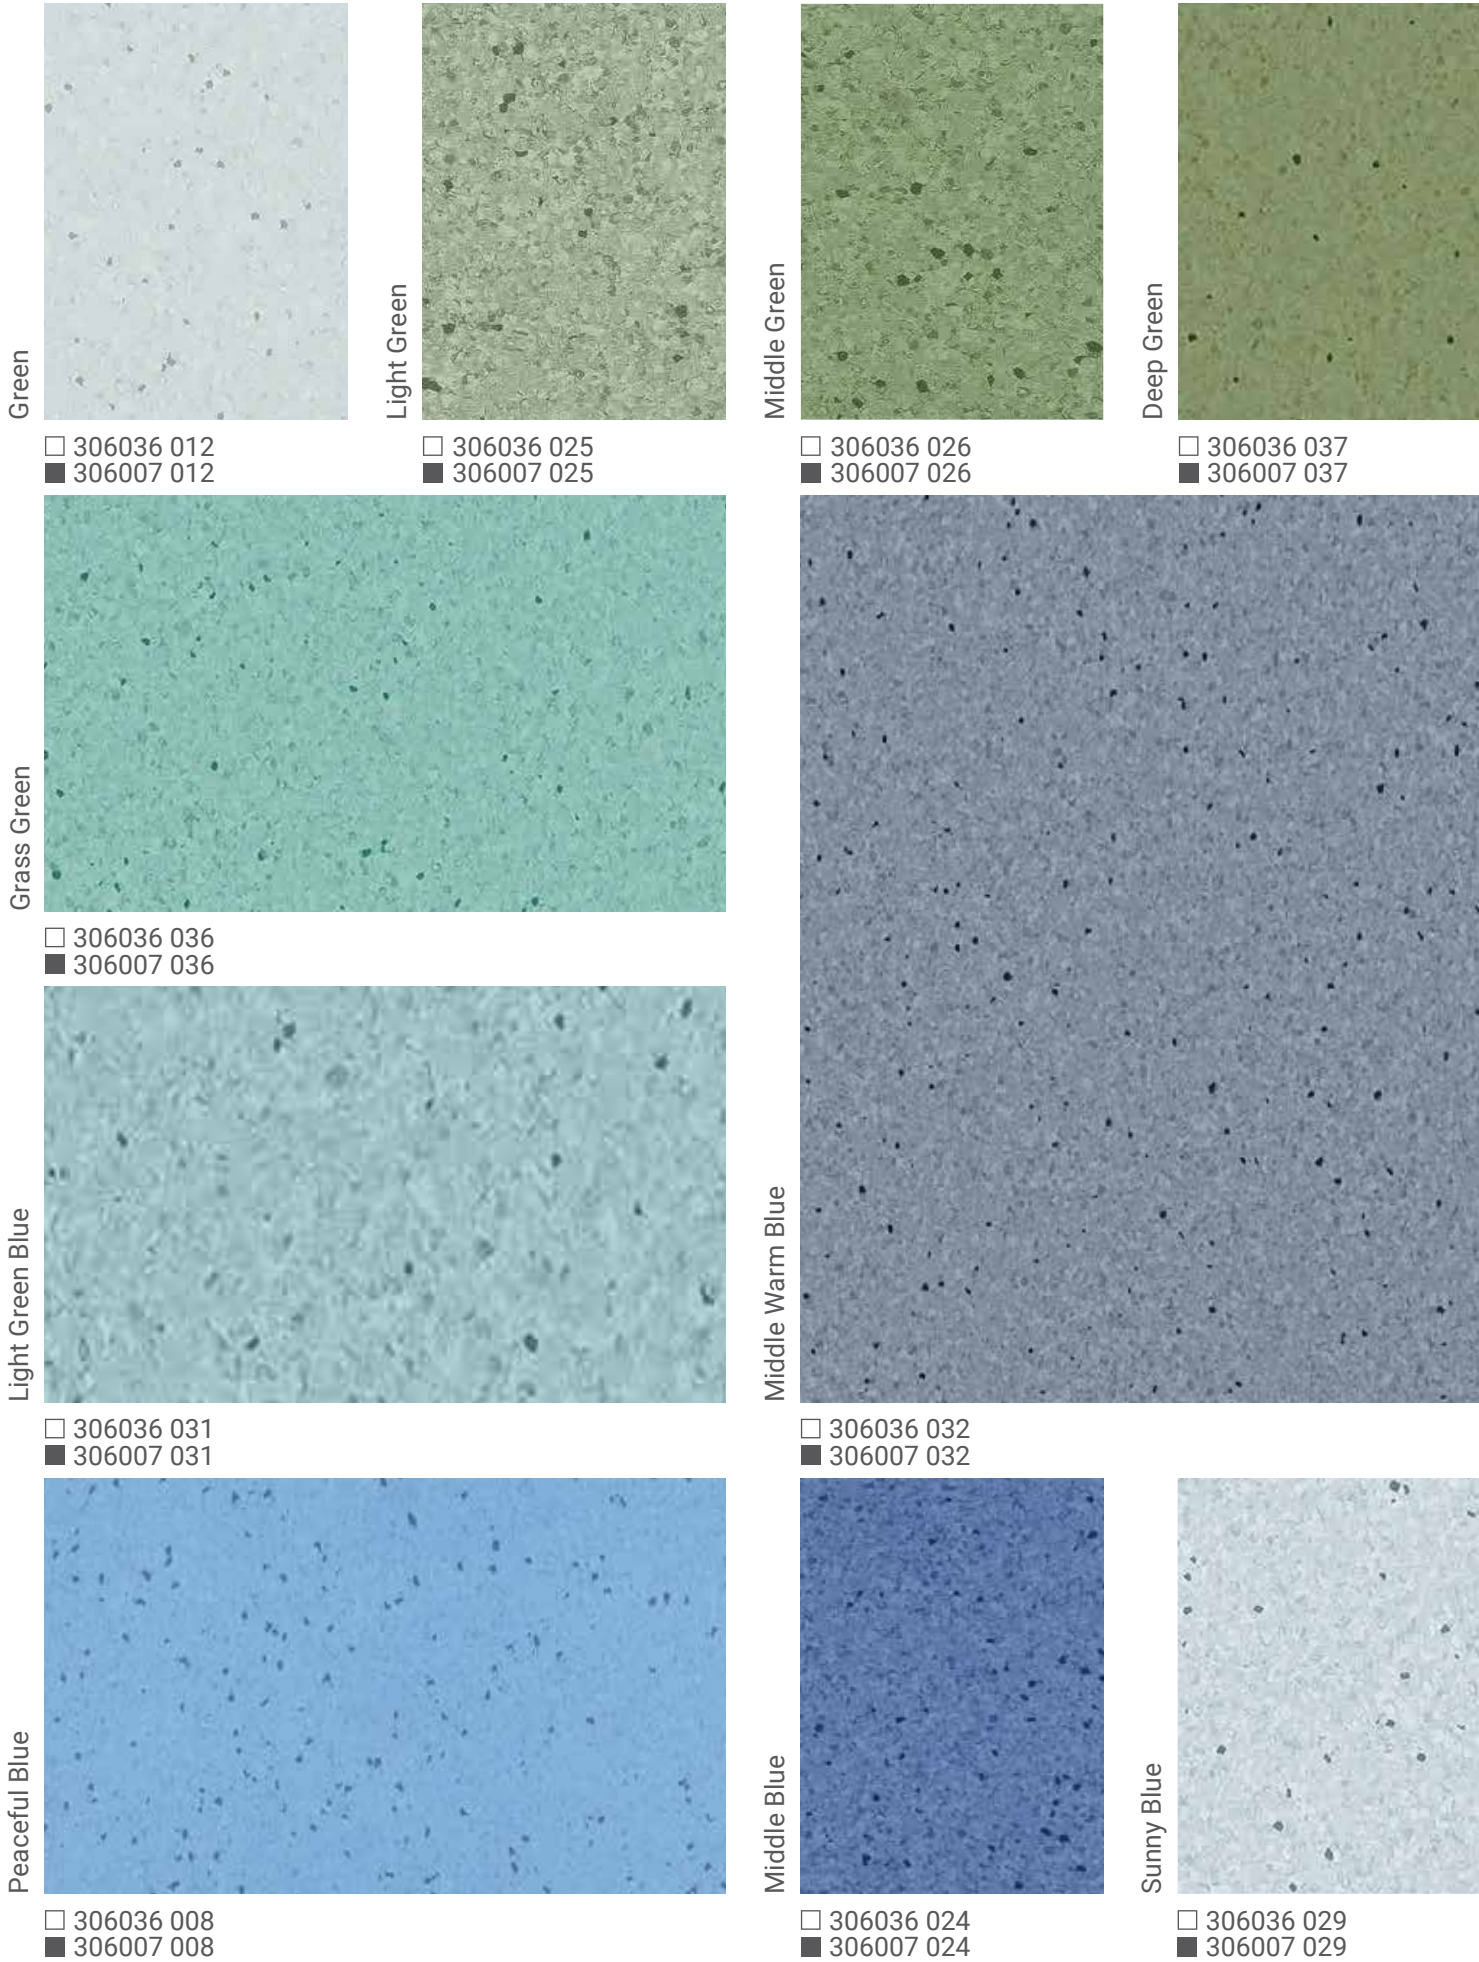

Somplan 380/Somplan 350 - HOMOGENEOUS VINYL



□ Somplan 380 306036 --
■ Somplan 350 306007 --

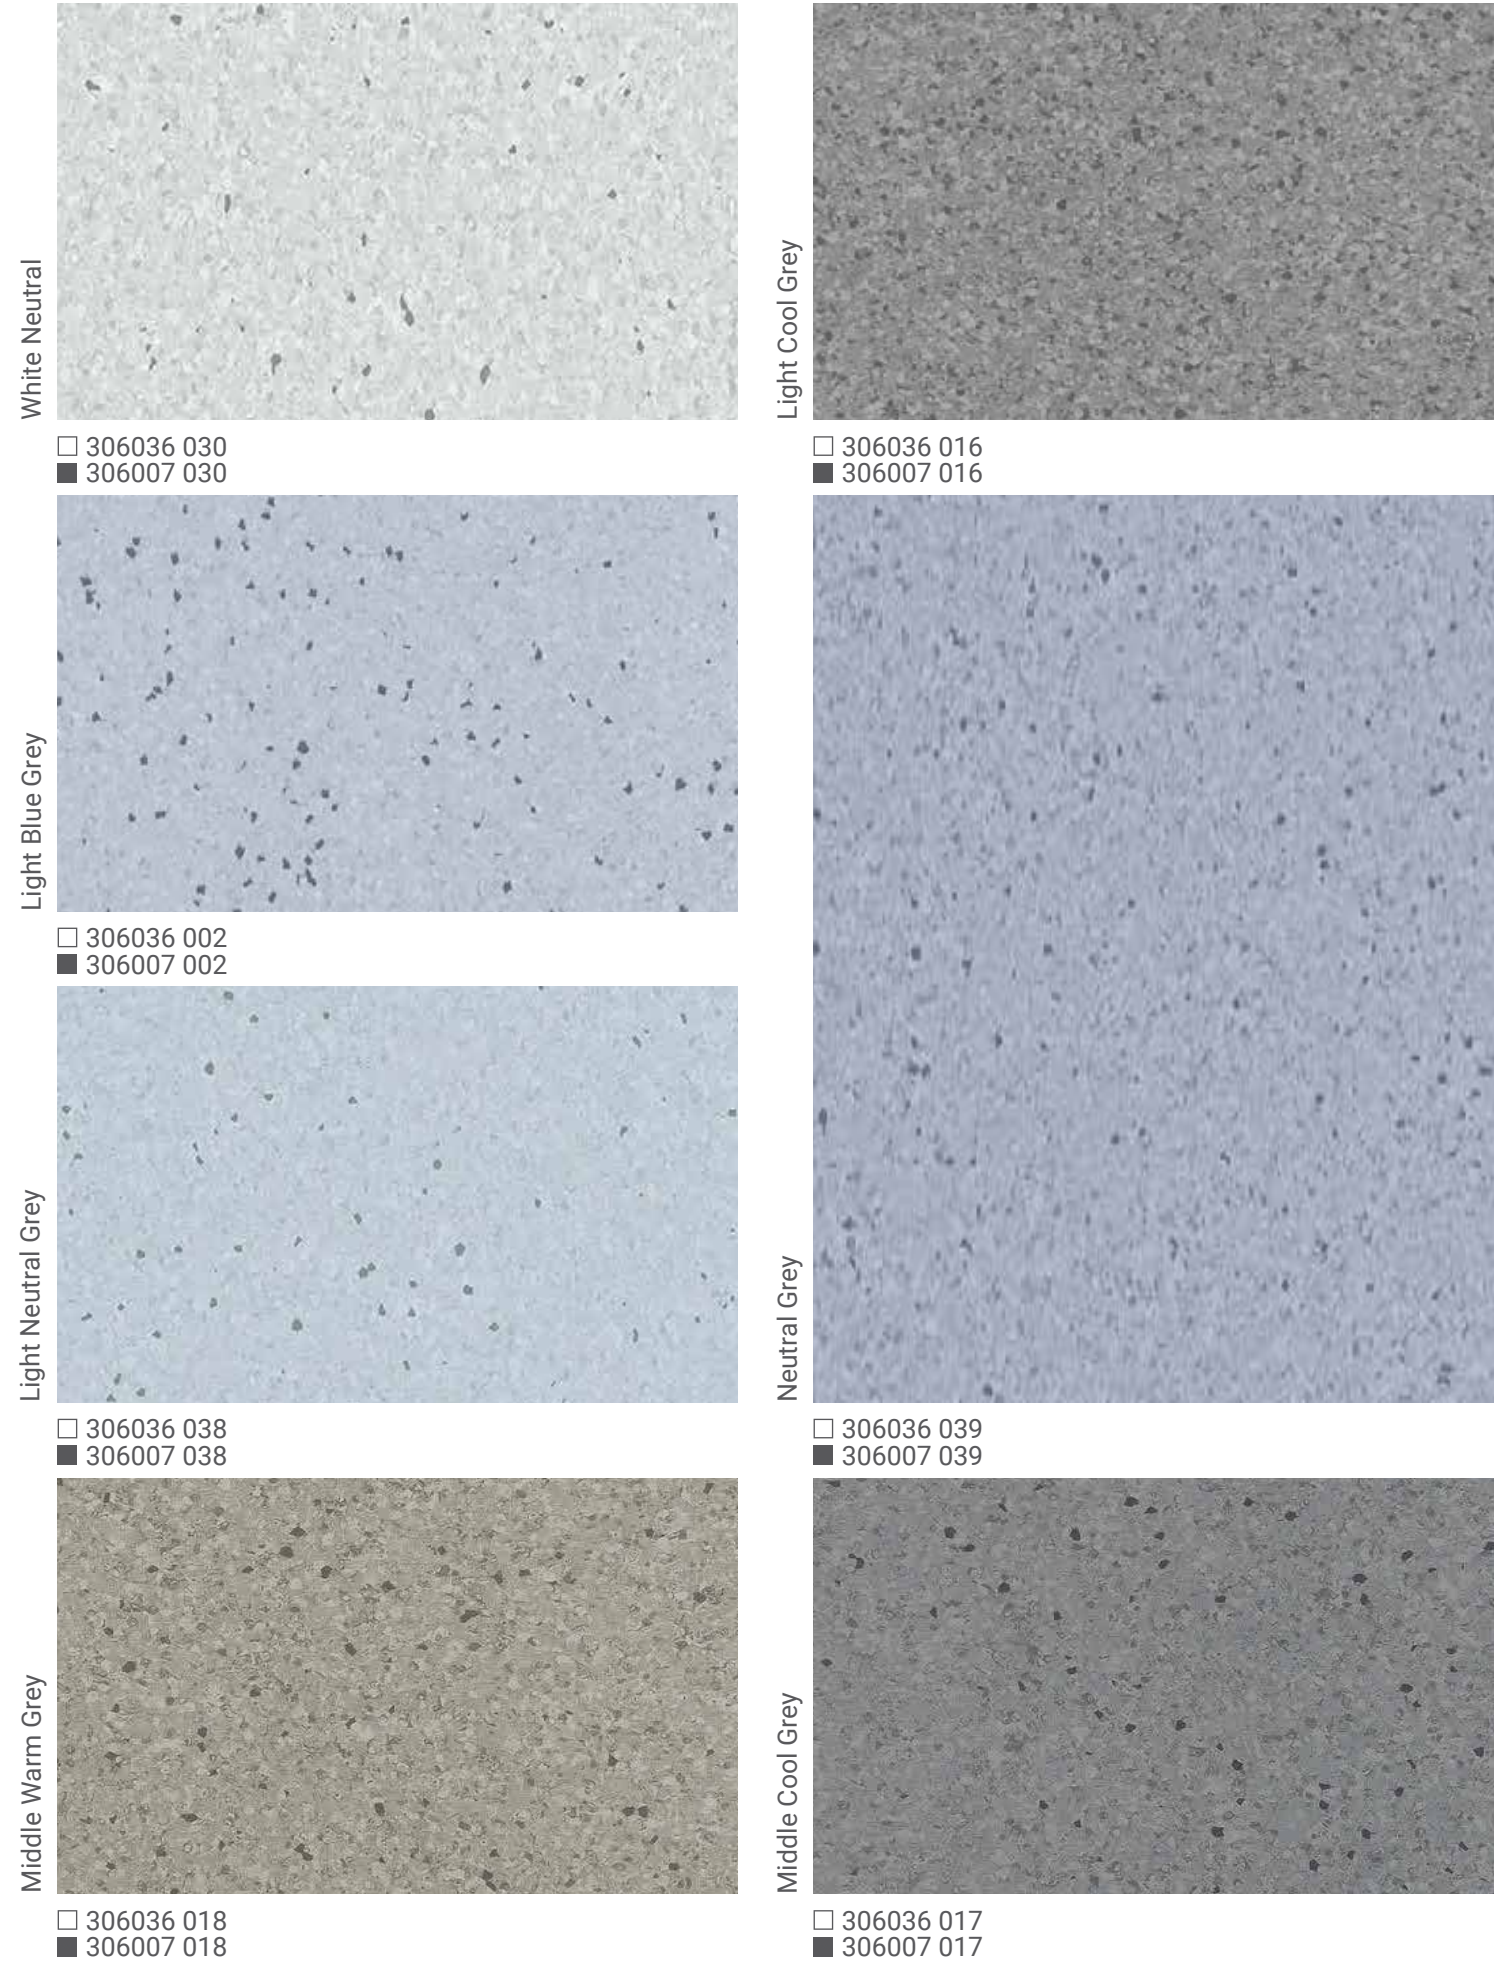


Somplan 380/Somplan 350 - HOMOGENEOUS VINYL



Somplan 380/Somplan 350


□ Somplan 380 306036 --
■ Somplan 350 306007 --

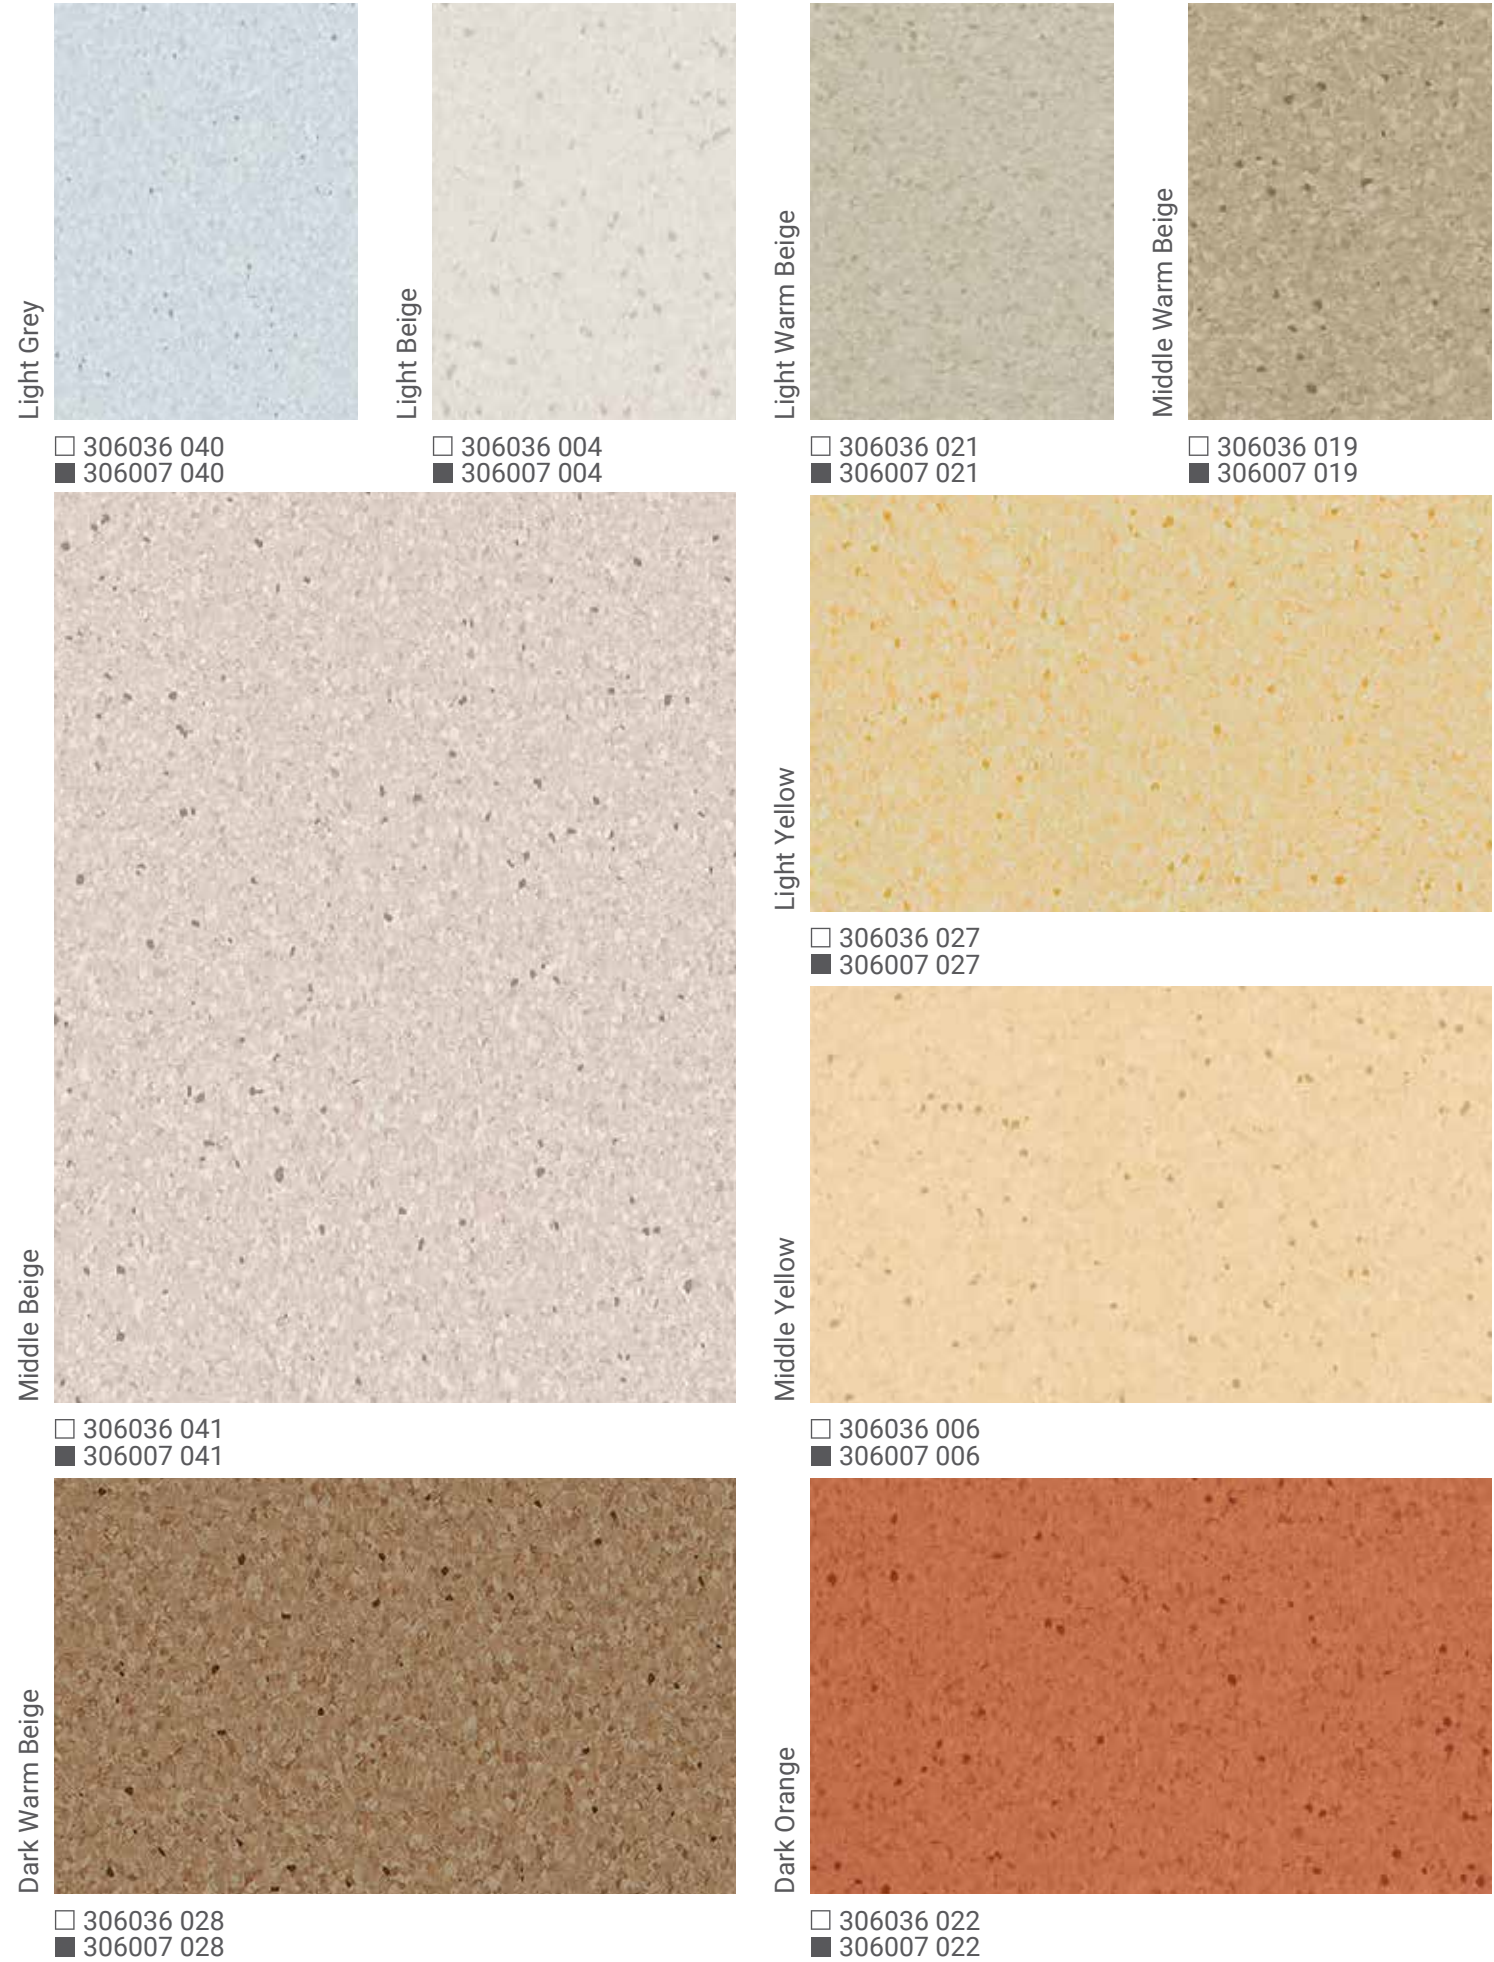

Somplan 380/Somplan 350 - HOMOGENEOUS VINYL



□ Somplan 380 306036 --
■ Somplan 350 306007 --

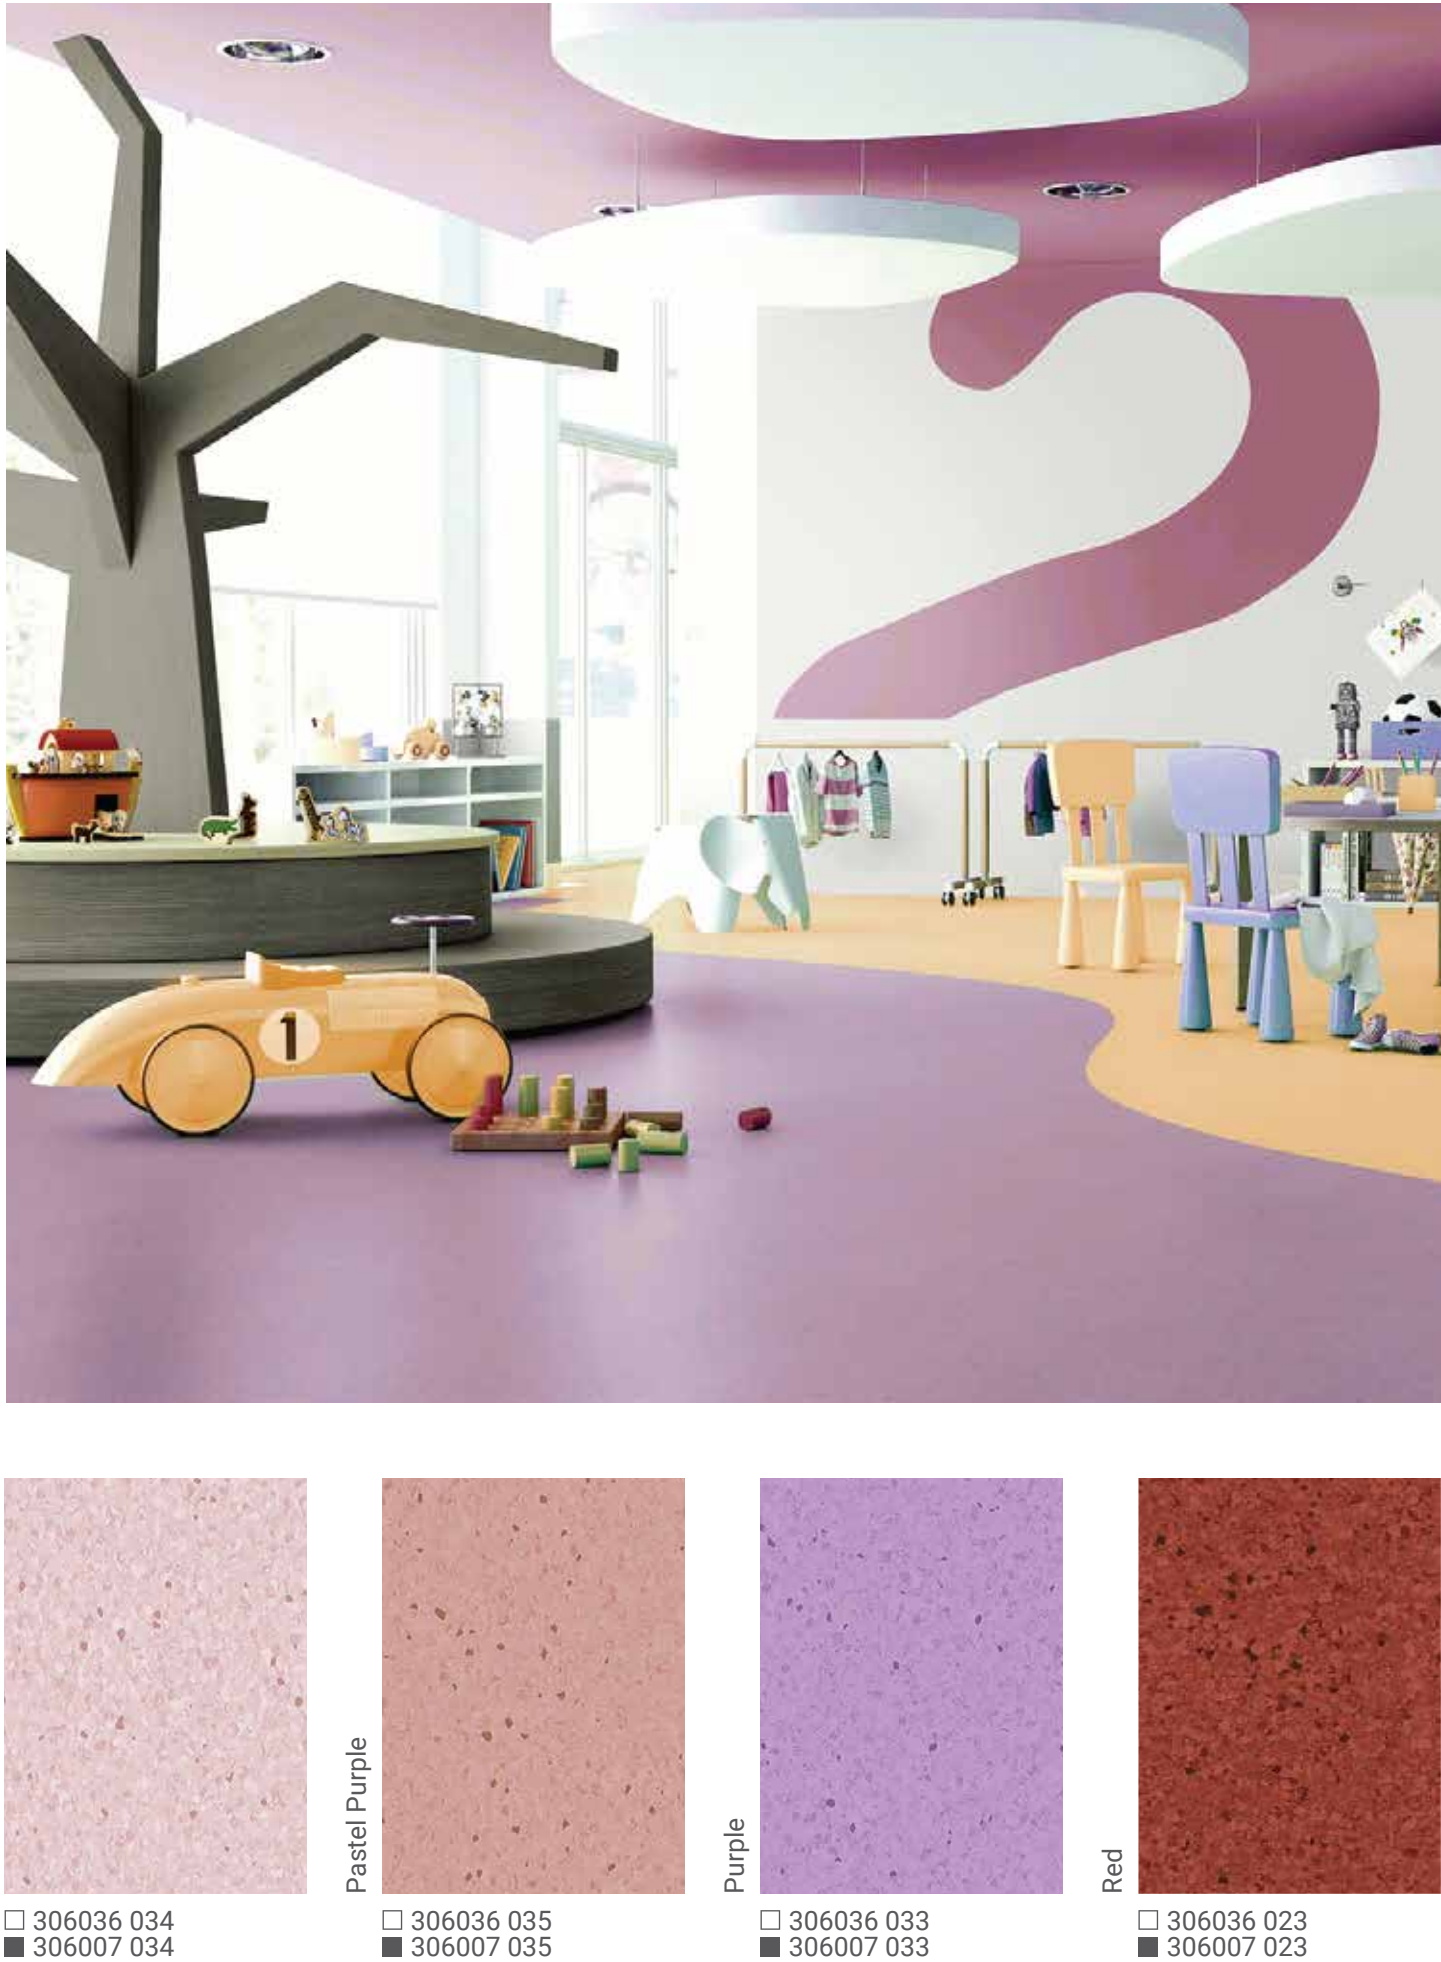

Somplan 380/Somplan 350 - HOMOGENEOUS VINYL