

Granit Safe.T

Classification		
Product type	EN 13845	Polyvinyl chloride floor coverings with particle based enhanced slip resistance
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical characteristics		
Total thickness	EN ISO 24346	2 mm
Total weight	EN ISO 23997	2950 g/m²
Surface treatment		Safe.T Clean XP™
Performance for CE Marking		
Declaration of performance	EN 14041	0019-0006-DoP-2013-07
Reaction to fire	EN ISO 13501-1	Bfl-s1
Static electrical propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	ISO 10456	0,010 m² ·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0,30)
Technical Performance		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.02 mm
Dimensional stability	EN ISO 23999	Average Measured Value: ≤ 0.40 %
Slip resistance	DIN 51130 DIN 51097 BS 7976-2	R10 C Low risk of slip
Castor chair	ISO 4918	Suitable
Colour fastness to light	EN ISO 105-B02	≥ 7
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Curl resultant to heat	EN ISO 23999	≤ 8 mm
Chemical resistance	EN ISO 26987	Good resistance
Bacteria resistance	ISO 846 Part C	Does not favour growth
Seam Strength	EN 684	Average Value: ≥ 400 N/50mm
Wetroom approval	EN 13553 Annex A	Watertight
Sustainability performances		
Recyclability through ReStart®		Recyclable
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		6,79 kg CO2eq /m²
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m³)
Dimensions and designs		
Roll		Roll 2 x 25 m
Number of designs available		24

The above information is subject to modification for the benefit of further improvement. (02/24).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Granit Safe.T	NCS No.	Welding Rod		Granit Safe.T	NCS No.	Welding Rod		Granit Safe.T	NCS No.	Welding Rod		Granit Safe.T	NCS No.	Welding Rod	
		Plain	Multicolour			Plain	Multicolour			Plain	Multicolour			Plain	Multicolour
502	S 1500-N	1287 703	1290 283	508	S 4005-Y20R	1287 830	1290 361	515	S 4030-R90B	1288 307	1290 273	521	S 6020-R90B	1287 901	—
503	S 2500-N	1287 691	1290 121	509	S 3010-Y30R	1287 391	1290 143	516	S 2020-R90B	1287 803	1290 425	523	S 4020-B30G	1287 040	—
504	S 4502-B	1292 383	1290 021	511	S 1510-Y30R	1291 615	1290 393	517	S 2020-B10G	1287 297	1290 107	524	S 2500-N	1291 811	—
505	S 6502-B	1287 842	1290 026	512	S 1505-Y50R	1287 698	1290 036	518	S 2010-G	1287 860	1290 413	571	S 2010-Y70R	1291 983	—
506	S 8502-B	1291 933	1290 035	513	S 3005-Y50R	1287 291	1290 375	519	S 6500-N	1294 727	—	633	S 3030-Y70R	1287 665	—
507	S 1505-Y30R	1292 319	1290 422	514	S 2005-G	1287 202	1290 356	520	S 2005-Y30R	1292 393	—	909	S 3020-Y20R	1287 690	—

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 ■ Belgium: Tarkett Belux Sprl - Tel. +32 52 26 24 11 ■ Denmark: Tarkett A/S - Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy - Tel. +358 9 4257 9000 ■ France: Tarkett SAS - Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 ■ Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. - Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 ■ Netherlands: Tarkett BV - Tel. +31 416 685 491 ■ Norway: Tarkett AS - Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA - Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. - Tel. +34 914 951 400 ■ Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24 ■ Turkey: Tarkett Turkey - Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 ■ EASTERN EUROPE: Baltic Countries: Estonia: Tel. +372 55 515880 ■ Latvia: Tel. +371 26 112014 ■ Lithuania: Tel. +370 37 262220 ■ Czech Republic: Tarkett.org.slozka - Tel. +420 271 001 600 ■ Hungary: Tarkett Polska Sp. z o.o. magyarországi fióktelepe - Tel. +36 1 457 6150 ■ Kazakhstan: Tarkett Kazakhstan - Tel. +7 7172 79 00 99 ■ Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 ■ Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3757 ■ Slovakia: Tarkett Polska Sp. z o.o. organizačná zložka - Tel. +421 2 48291 317 ■ South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA - Tel. +38 (0) 44 95 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 ■ India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 8750 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israël: Tarkett International: +33 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ LATIN AMERICA: Brazil: Tarkett Brasil: Tel. +55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Mexico - Tel. +55 11 98410 9310

professionals.tarkett.com



Printed on recyclable paper and cardboard

Customs tariff: 4820500000

Granit Safe.T - 310001 0046 - 02/24



Granit Safe.T




HOMOGENEOUS VINYL
SAFETY FLOORCOVERING

Granit Safe.T

HOMOGENEOUS VINYL SAFETY FLOORCOVERING

Homogeneous
anti-slip
solutions



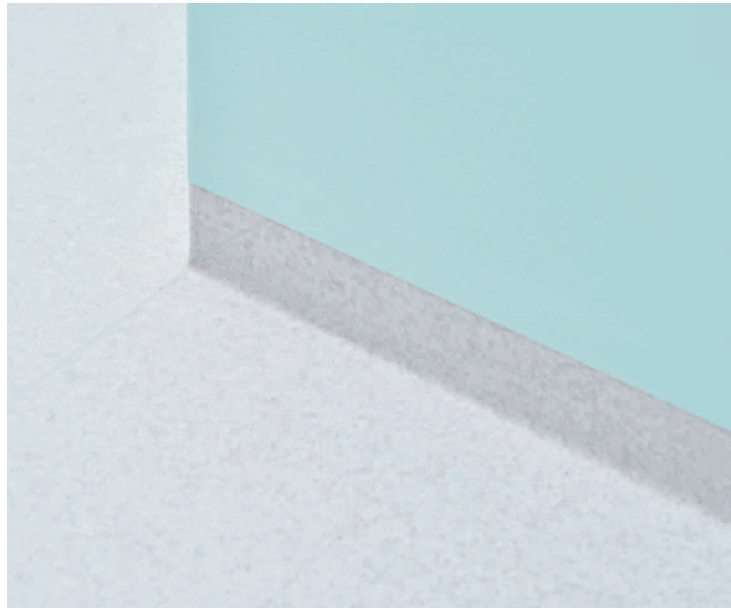

Granit Safe.T light grey 21153 502




Superior slip resistant flooring

Granit Safe.T is a homogeneous vinyl safety flooring suitable for use in commercial and wet room areas. Granit Safe.T offers a unique construction where particles are embedded through the whole construction of the product (according to EN 13845). This ensures its anti-slip qualities to make safety last for decades. The 24 colourways are colour- and pattern-coordinated with the extended iQ Granit family.

- Excellent slip resistance properties (R10)
- Equipped with Safe.T Clean XP™ treatment surface for easier cleaning and better hygiene
- Wet room approved
- Coordinated multicolor welding rods for perfect finishing
- Phthalate-free and very low VOC emissions
- Check our website to find the Dementia Friendly references












Granit Safe.T light grey 21153 502

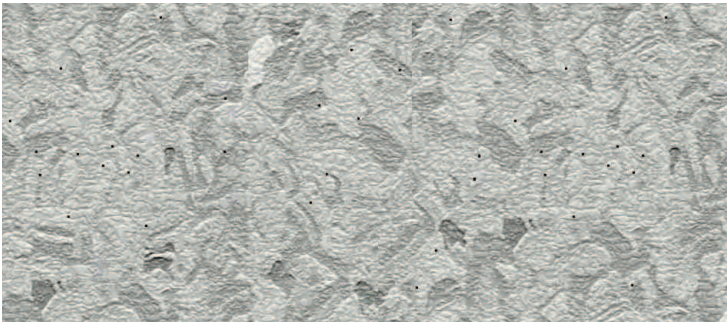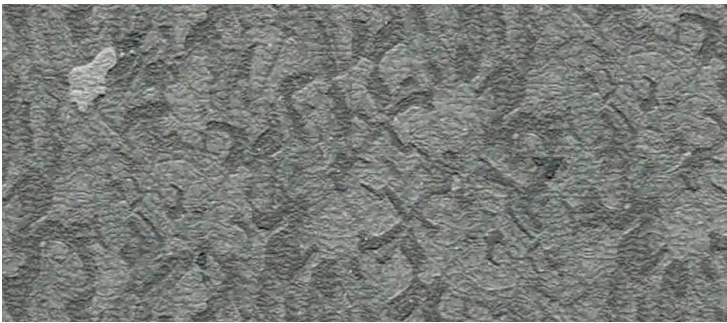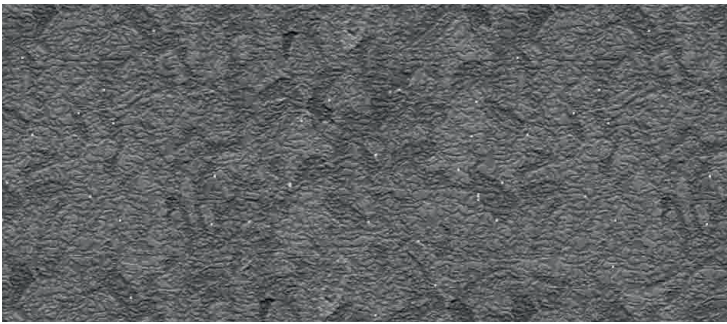light grey		21153 502	NCS S 1500-N / LRV 65%
grey		21153 503	NCS S 2500-N / LRV 50%
dark grey		21153 504	NCS S 4502-B / LRV 29%
black grey		21153 505	NCS S 6502-B / LRV 15%
black		21153 506	NCS S 8502-B / LRV 6%

LRV = Luminous Reflectance Value

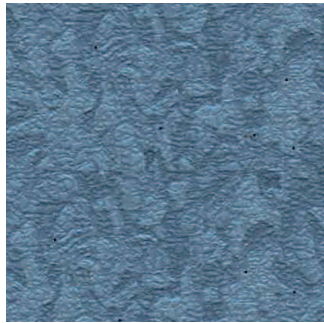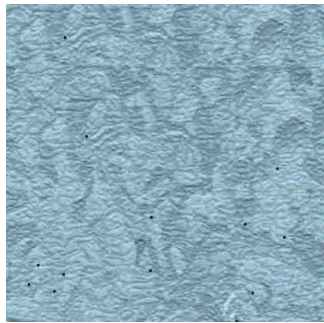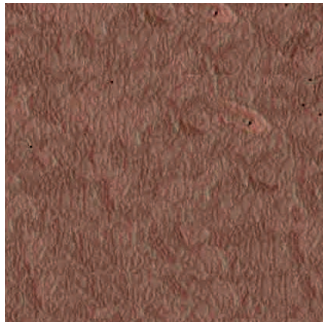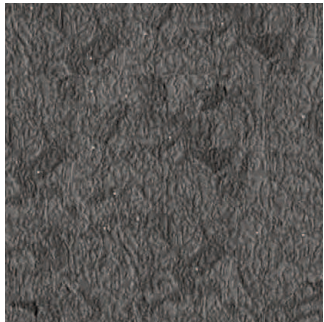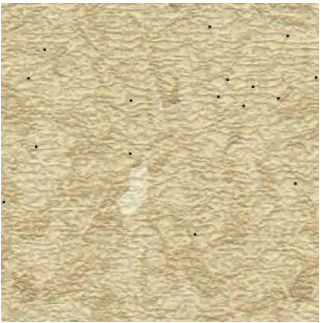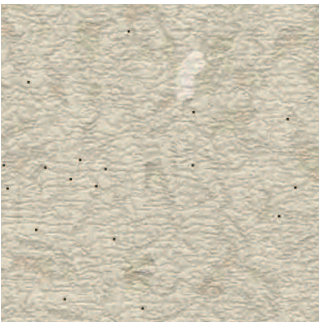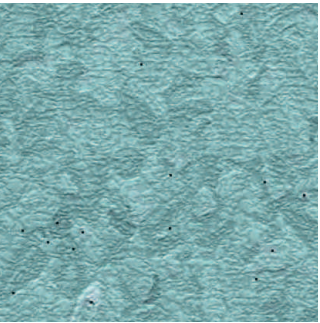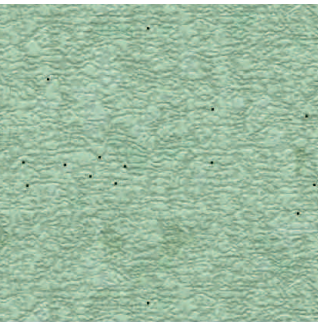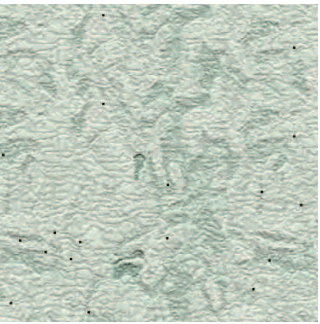

soft dark blue		21153 521	NCS S 6020-R90B / LRV 11%
blue		21153 515	NCS S 4030-R90B / LRV 20%
light blue		21153 516	NCS S 2020-R90B / LRV 44%
soft light grey		21153 524	NCS S 2500-N / LRV 50%
soft brick		21153 633	NCS S 5030-Y70R / LRV 15%
soft pale brick		21153 571	NCS S 2010-Y70R / LRV 52%
white beige		21153 512	NCS S 1505-Y50R / LRV 63%
clay		21153 513	NCS S 3005-Y50R / LRV 40%
soft black		21153 519	NCS S 6500 -N / LRV 16%
soft dusty yellow		21153 909	NCS S 3020-Y20R / LRV 37%
sand		21153 511	NCS S 1510-Y30R / LRV 61%
soft white sand		21153 520	NCS S 2005-Y30R / LRV 56%
light sand		21153 507	NCS S 1505-Y30R / LRV 64%
warm sand		21153 509	NCS S 3010-Y30R / LRV 41%
soft aqua		21153 523	NCS S 4020 -B30G / LRV 25%
light aqua		21153 517	NCS S 2020-B10G / LRV 44%
light green		21153 518	NCS S 2010-G / LRV 52%
white green		21153 514	NCS S 2005 -G / LRV 54%
dark sand		21153 508	NCS S 4005-Y20R / LRV 33%