

Tapiflex Stairs

TECHNICAL DATA	STANDARD	TAPIFLEX STAIRS	TAPIFLEX STAIRS SELF-ADHESIVE
Classification	Norm	Tarkett Value	Tarkett Value
Product type	EN ISO 11638	Polyvinyl chloride floor coverings with foam layer	Polyvinyl chloride floor coverings with foam layer
Commercial classification	EN ISO 10874	34 Very Heavy	34 Very Heavy
Industrial classification	EN ISO 10874	42 General	42 General
Wear layer binder content	EN ISO 11638	Type I	Type I
Technical Characteristics	Norm	Tarkett Value	Tarkett Value
Wear layer thickness	EN ISO 24340	0.85 mm	0.85 mm
Total thickness	EN ISO 24346	3.30 mm	3.30 mm
Total weight	EN ISO 23997	3250 g/m²	3250 g/m²
Surface treatment		Top Clean XP®	Top Clean XP®
Installation method		Glue-down	Self-Adhesive
Performance for CE Marking	Norm	Tarkett Value	Tarkett Value
Declaration of Performance	EN 14041	0120-025-DoP-2024-02	0120-0069-DoP-2024-02
Reaction to fire	EN ISO 13501-1	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate	Cfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Antistatic (≤ 2 kV)
Thermal resistance	EN ISO 10456	0.04 m² •K/W	0.04 m² •K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0,30)	Class DS (μ ≥ 0,30)
Technical Performances	Norm	Tarkett Value	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm	Required value: ≤ 0.20 mm
Dimensional stability	EN ISO 23999	Required value: ≤ 0.40 mm Average measured value*: ≤ 0.10%	Required value: ≤ 0.40 mm Average measured value*: ≤ 0.10%
Impact sound reduction - ΔLw	EN ISO 717 / 2	18 dB	18 dB
Reduction of in-room impact noise	NF S31-074	Class A (≤ 65 dB)	Class A (≤ 65 dB)
Slip resistance ⁽¹⁾	DIN EN 16165	R10	R10
Furniture leg	EN ISO 16581	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 8 mm
Colour fastness to light	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Not affected	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)	Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett Value	Tarkett Value
Recyclability through ReStart®		Recyclable	Recyclable
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m³)	≤ 100 µg/m³
Formaldehyde emission class	EN 717-1	E1	E1
Dimensions and designs		Tarkett Value	Tarkett Value
Roll		1 x 23 m	1 x 23 m
Number of designs available		15	5

The above information is subject to modification for the benefit of further improvement. (06/24).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Tapiflex Stairs



10 years warranty



OPTIMAL INDOOR AIR QUALITY



Tapiflex Stairs Self-Adhesive



100 years warranty



OPTIMAL INDOOR AIR QUALITY



RECYCLABLE



24% RECYCLED CONTENT



PHTHALATE FREE



LOW FORMALDEHYDE EMISSIONS



ReStart



FloorScore



POTENTIAL CONTRIBUTOR GREEN BUILDING CERTIFICATIONS



A+ FORMALDEHYDE EMISSION CLASS



MHS



EPD



XP



NO WAX NO POLISH FOR LIFE



10 years GUARANTEE



COMMERCIAL USE



Tarkett



MADE IN FRANCE

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 ■ Belgium: Tarkett Belux Sprl - Tel. +32 52 26 24 11 ■ Denmark: Tarkett A/S - Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy - Tel. +358 9 4257 9000 ■ France: Tarkett SAS - Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 ■ Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. - Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 ■ Netherlands: Tarkett BV - Tel. +31 416 685 491 ■ Norway: Tarkett AS - Tel. +47 22 20 92 00 ■ Portugal: Tarkett SA - Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. - Tel. +34 914 951 400 ■ Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24 ■ Turkey: Tarkett Turkey - Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 354 040 ■ EASTERN EUROPE: Baltic Countries: Estonia: Tel. +371 26 112014 ■ Lithuania: Tel. +370 37 262220 ■ Czech Republic: Tarkett org. s.r.o. - Tel. +420 271 001 600 ■ Hungary: Tarkett Polska Sp. z o.o. magyarországi fióktelepe - Tel. +36 1 437 8150 ■ Kazakhstan: Tarkett Kazakhstan - Tel. +7 7172 79 00 99 ■ Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 ■ Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737 ■ Slovakia: Tarkett Polska Sp. z o.o. organizačná zložka - Tel. +421 2 48291 317 ■ South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 ■ India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 8750 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: +33 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5611 / Johnsonite - Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ LATIN AMERICA: Brazil: Tarkett Brasil - Tel. +55 12 3934 7108 ■ Argentina - Chile - Uruguay: Tarkett Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Mexico - Tel. +53 11 98410 9310

professionals.tarkett.com

Printed on recyclable paper and cardboard

Customs Tariff: 4820500000

Tapiflex Stairs - 206001 0116 - 06/24

HETEROGENEOUS
ACOUSTIC VINYL STAIRS



STAIRS



ROLL

GLUE-DOWN AND
SELF-ADHESIVE
INSTALLATION

Tapiflex Stairs

Tapiflex Stairs

HETEROGENEOUS ACOUSTIC VINYL STAIRS

Redesigning
safety


REDESIGNING SAFETY

SIMPLE STEPS TO LONG-LASTING STAIRS


The Tapiflex Stairs collection not only enhances safety but also elevates design aesthetics. Featuring 15 inspired designs mirroring the beauty of woods, minerals or solid colours, each one creates a cohesive environment across all areas of your building, perfectly complementing our floors and walls collections. Choose from a variety of accessibility options and accessories to promote autonomy and simplify navigation within the building. Tapiflex Stairs are part of a global solution that also includes walls and floors.

2

Installation methods



Glue-down



Self-adhesive

18dB

Acoustic profile




Noise absorption backing for optimal sound reduction

LRV = Light Reflectance Value

Smart Designs




15 Designs
Matt finish



3 Inspirations
Woods - Minerals - Chromy



Hyper-realism of wood textures and materials



Matches
with Excellence and Platinum ranges, wetroom and stairs ranges

Responsible flooring



Recycled content
24%



Recycling* through **ReStart®**



Optimal indoor air quality
≤ 10 µg/m³



NO Phthalates



NO Biocides
NO Heavy metals

Excellent performance



The only self-adhesive stair coverings that:

- Reduce installation time by 30%
- Allow you to keep staircases open during step-by-step installation and renovation
- Are available to use immediately after installation
- Safe-dry glue



Contrast stair nosing is included, that complies with safety regulations



Accessories available for a complete installation (self-adhesive studs, inside/outside stair corners, warning tiles, self-adhesive tactile strips)

*off-cuts and post-installation recycling

COLLAGE
RABAT

INTER







Discover more here!



TAPIFLEX STAIRS

TAPPED METAL STAIRS grey 206053 015 LRV 20% LRV 42% Contrast rate 52% NCS S 5502-R50B NCS S 4500-N	
ESQUISSE STAIRS dark grey 206053 004 LRV 12.6% LRV 42% Contrast rate 70% NCS S 6500-N NCS S 4500-N	
ESQUISSE STAIRS light grey 206053 005 LRV 30% LRV 8.5% Contrast rate 72% NCS S 4502-Y50R NCS S 7502-R	
UNI STAIRS medium grey 206053 013 SA 206054 020 LRV 38% LRV 8.5% Contrast rate 78% NCS S 3502-R50B NCS S 7502-R	
UNI STAIRS grey 206053 011 SA 206054 019 LRV 12% LRV 42% Contrast rate 71% NCS S 6005-R80B NCS S 4500-N	
UNI STAIRS dark beige 206053 010 LRV 28.9% LRV 8.5% Contrast rate 71% NCS S 4005-Y20R NCS S 7502-R	
TISSAGE² STAIRS soft grege 206053 009 LRV 37.4% LRV 8.5% Contrast rate 77% NCS S 3005-Y20R NCS S 7502-R	

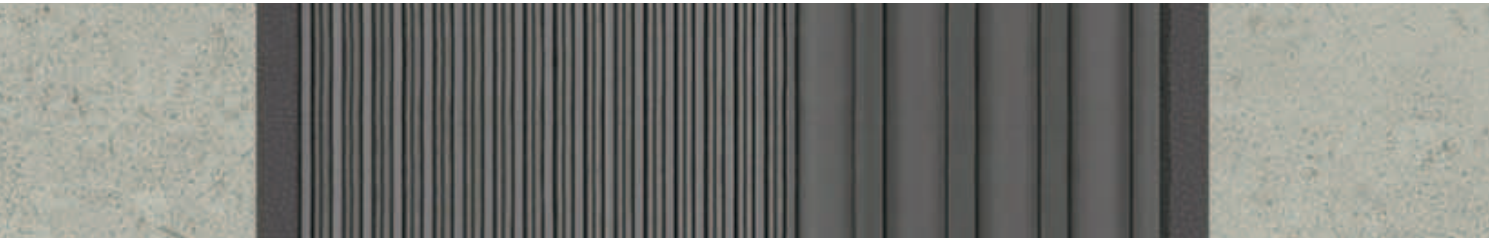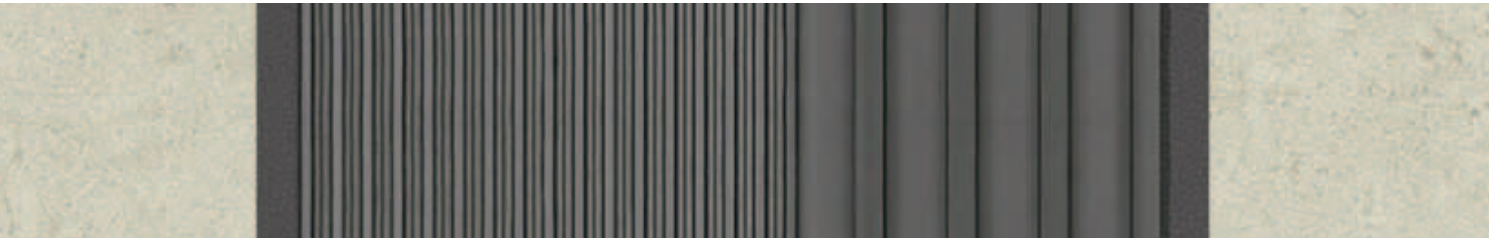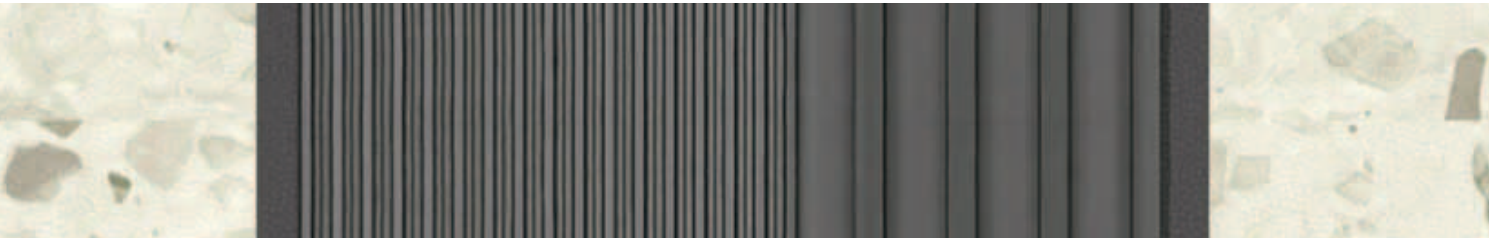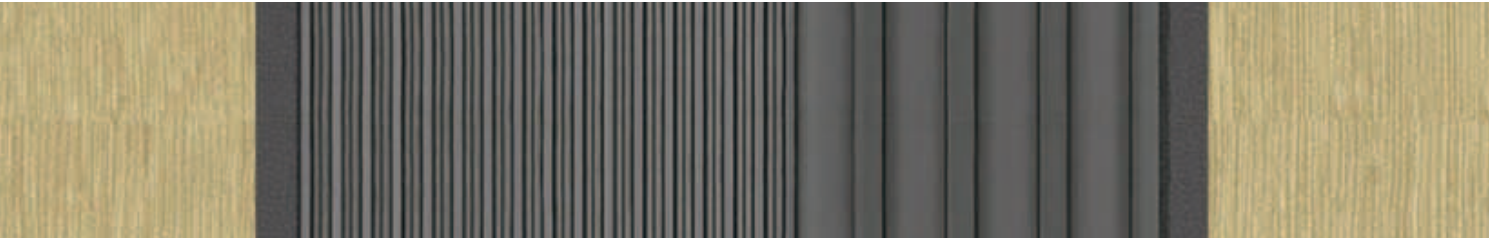

UNI STAIRS deep yellow 206053 012 LRV 38.5% LRV 8.5% Contrast rate 78% NCS S 2030-Y20R NCS S 7502-R	
CONCRETE STAIRS dark grey 206053 003 SA 206054 016 LRV 11.6% LRV 42% Contrast rate 72% NCS S 6502-Y80R NCS S 4500-N	
CONCRETE STAIRS cool grey 206053 001 SA 206054 017 LRV 32% LRV 8.5% Contrast rate 73% NCS S 3502-Y80R NCS S 7502-R	
CONCRETE STAIRS chalk 206053 002 LRV 45.3% LRV 8.5% Contrast rate 81% NCS S 2502-Y50R NCS S 7502-R	
TERRAZZO STAIRS natural grey 206053 014 LRV 45.5% LRV 8.5% Contrast rate 81% NCS S 2502-Y50R NCS S 7502-R	
OAK TREE STAIRS grey 206053 007 LRV 28% LRV 8.5% Contrast rate 70% NCS S 5005-Y20R NCS S 7502-R	
OAK TREE STAIRS beige 206053 006 SA 206054 018 LRV 40.7% LRV 8.5% Contrast rate 79% NCS S 3010-Y40R NCS S 7502-R	
OAK TREE STAIRS golden 206053 008 LRV 30.9% LRV 8.5% Contrast rate 72% NCS S 4020-Y30R NCS S 7502-R	

The colour chart that sets the tone

COLLAGE
SUR GARDE

INTER



SPEED INSTALL


SELF-ADHESIVE OPTION

Five Tapiflex Stairs references come with a self-adhesive backing to facilitate and speed up installation. The stair coverings are delivered as separate steps. Because they are installed horizontally, stairs can stay accessible while Tapiflex is positioned.



Faster time to the Top

The glue on Tapiflex Stairs requires no waiting time

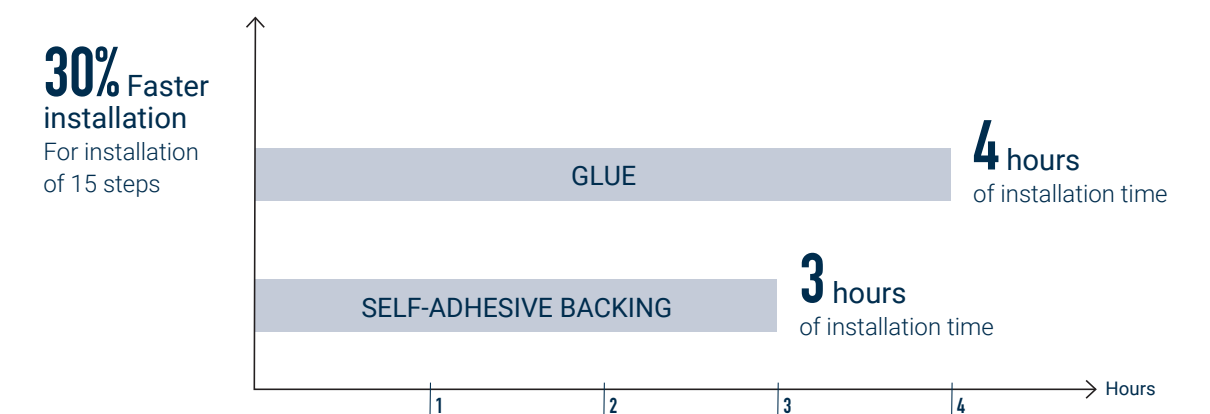

Free circulation during installation

Step-by-step installation

Stairs remain open to passing feet during the time it takes to install Tapiflex. Working step by step makes renovation much easier if a step is damaged



Use immediately

Once in place, stairs can be used immediately. There's no need to wait for the adhesive to dry



Glue included

Ready-to-use, safe-dry glue

No additional glue is required during installation, since each step already has a backing of safe-dry glue. A protective film separates steps from each other, making unpacking easy.