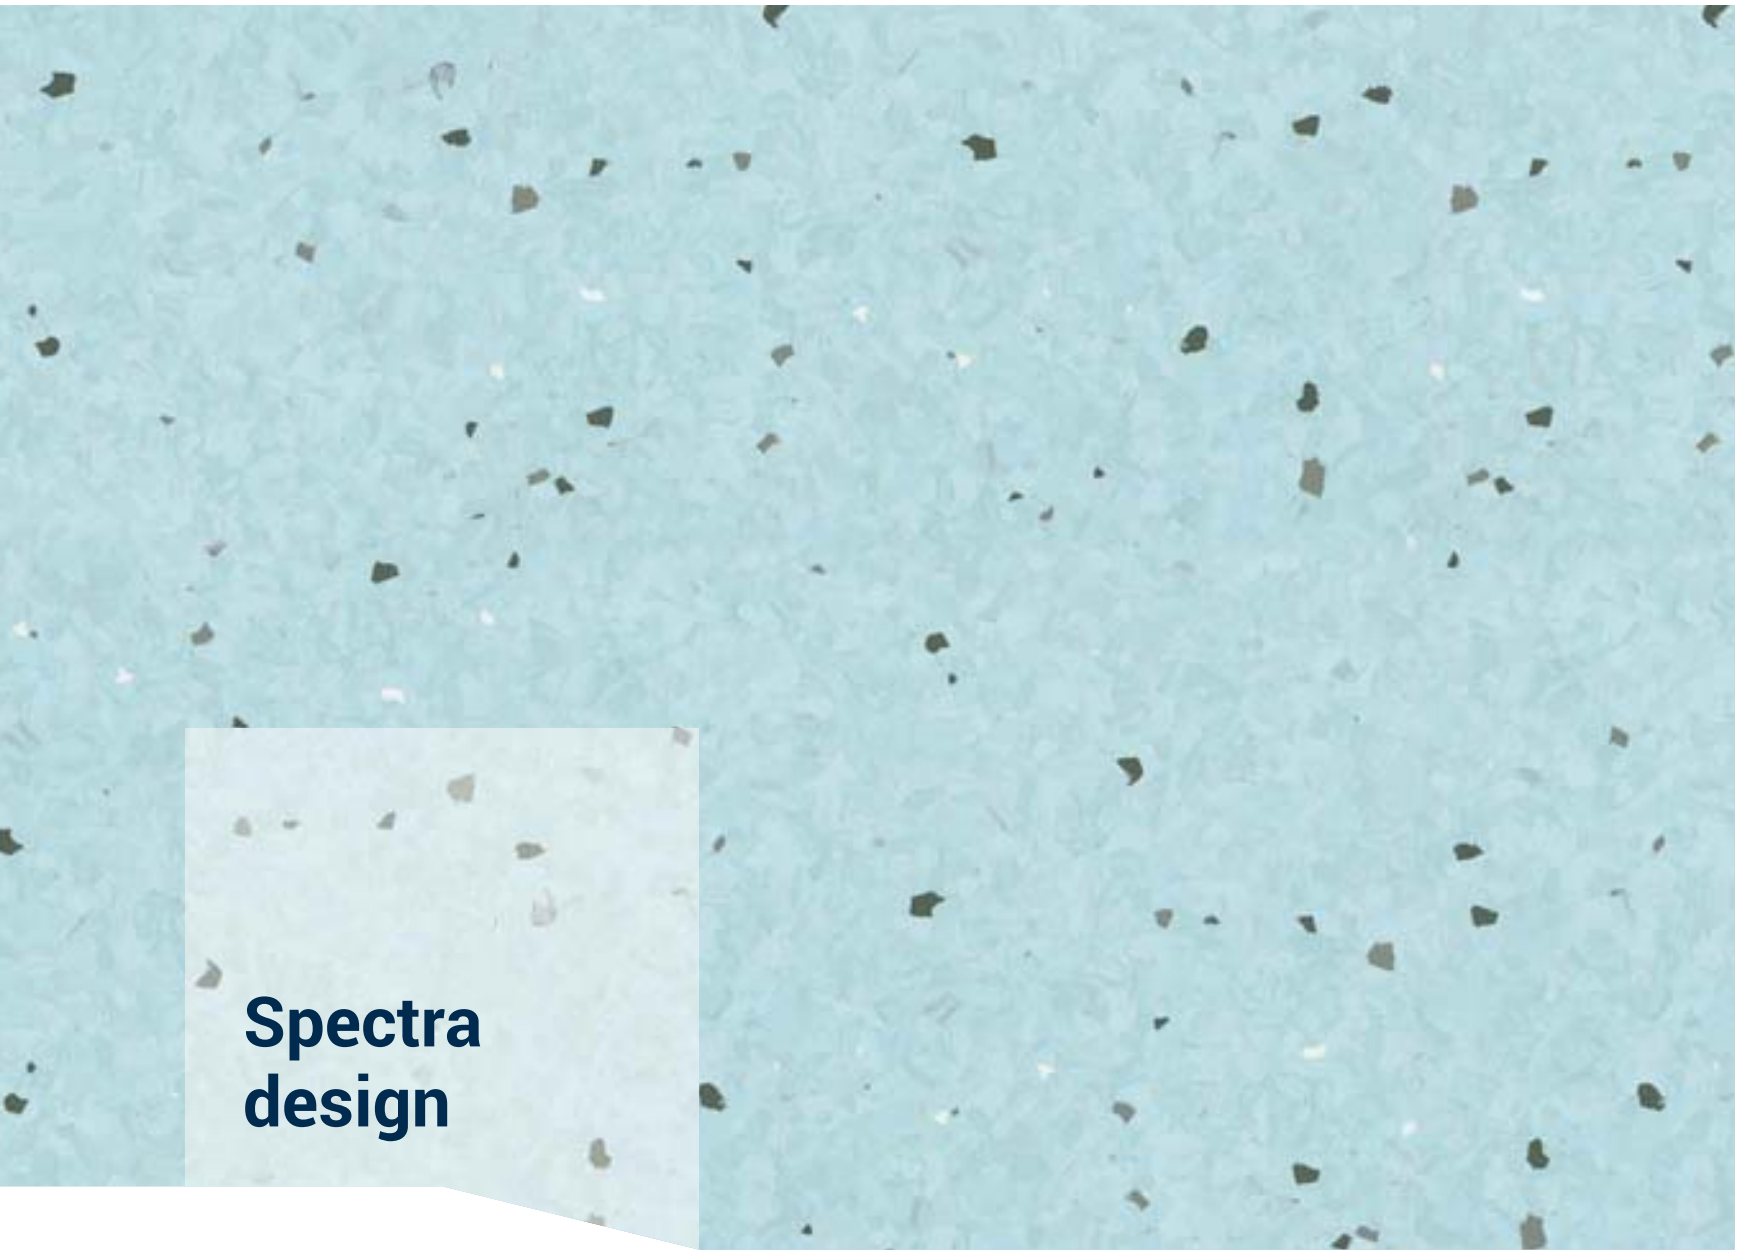

The Premium Spectra brings pastel and bright colours along with a unique modern style. It helps you to create an inspiring atmosphere, full of energy. Its low contrasted pattern with few accents is the perfect bridge between our Primo and Eclipse collections.



■ **Pattern**
This pattern supports your creativity. It offers multiple possibilities for a **perfect mix and match**.

■ **12 colours**
These colours are the best choice to **highlight** a specific area or to design **soothing and modern** spaces.

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces. Working with industry partners, we're bringing our best thinking and efforts toward making a positive impact on people and the planet.

Designing for life
Developing products based on Cradle to Cradle® principles that contribute to people friendly spaces AND respect the planet's natural capital.

Healthy spaces thanks to 100% phthalate-free product
phthalate free 100%

Since 2010, we have developed the use of a phthalate-free plasticizer technology for our vinyl floors which is approved for food containers and toys intended to be placed in the mouth by children.

Good indoor air quality
≤ 10 µg/m³ Optimal Indoor Air Quality *TVOC AT 28 DAYS

Through low levels of total volatile organic compounds (TVOCs) - TVOCs ≤ 10 µg/m³, much lower than EU standard EN ISO 16000.

Closing the loop
Building a circular economy inclusive of programs and business models that encourage take-back, recycling, reuse and elimination of waste.

Premium Collection is eligible to ReStart®, Tarkett's take-back program which can help customers manage their installation waste while ensuring it is recycled.

ReStart Ready — MADE IN EUROPE

Coordinated Welding rods - NCS - LRV

Eclipse Premium Classic	Colours	NCS No.	LRV	Welding Rods Multicolour	Welding Rods Uni
004	medium gold	S 2020-Y20R	50%	1290 270	1292 611
010	medium green	S 3020-G30Y	37%	1290 265	1287 332
012	dark cool grey	S 6502-B	15%	1290 192	1287 392
026	light warm grey	S 2500-N	50%	1290 190	1292 455
035	medium cool grey	S 3502-B	37%	1290 191	1292 105
036	medium warm beige	S 2005-Y40R	71%	1290 264	1287 160
038	light pure grey	S 1000-N	74%	1290 262	1287 338
039	medium pure grey	S 2002-R50B	56%	1290 028	1291 811
040	medium grey	S 4000-N	34%	1290 189	1287 413
067	medium grey blue	S 3020-R80B	32%	1290 272	1291 851
645	light cool beige	S 1002-Y50R	74%	1290 193	1290 013
669	white blue	S 2020-R80B	43%	1290 371	1287 513
677	white green	S 2020-G30Y	50%	1290 372	1287 826
730	medium blue	S 3030-R90B	28%	1290 197	1288 344
787	white grey	S 4500-N	30%	1290 373	1287 006
808	white beige	S 2005-Y40R	71%	1290 374	1291 810
809	white clay grey	S 4005-Y50R	31%	1290 375	1291 847
810	white brown	S 7005-Y50R	13%	1290 376	1287 013

Eclipse Premium Spirit	Colours	NCS No.	LRV	Welding Rods Multicolour	Welding Rods Uni
701	light grey	S 2000-N	57%	1290 355	1287 837
707	black	S 8502-B	6%	1290 390	1287 340
708	dark warm grey	S 6502-Y	16%	1290 391	1287 906
709	warm grey	S 3502-Y	38%	1290 122	1287 524
717	medium grey	S 4500-N	30%	1290 170	1292 383
720	dark clay grey	S 5005-Y50R	24%	1290 392	1287 498
725	dark brown	S 7005-Y50R	13%	1290 309	1287 013
732	yellow	S 1040-Y20R	60%	1290 166	1287 504
767	sand	S 2010-Y30R	56%	1290 393	1291 681
768	dark bric	S 5020-Y70R	19%	1290 394	1287 916
769	light olive green	S 2020-G60Y	50%	1290 395	1287 442
771	green	S 3030-G20Y	32%	1290 396	1287 915
773	ocean blue	S 3030-B10G	29%	1290 397	1287 641
774	light ocean blue	S 2020-B10G	44%	1290 398	1287 509
775	midnight blue	S 5030-R80B	12%	1290 399	1288 384
776	red purple	S 3050-R20B	15%	1290 400	1287 905
781	light red	S 1030-Y80R	48%	1290 401	1287 904
783	red	S 2060-Y80R	22%	1290 402	1287 908
784	orange	S 1050-Y60R	41%	1290 403	1288 339
785	light orange	S 1020-Y40R	61%	1290 404	1287 903
786	light yellow	S 1020-Y20R	65%	1290 405	1287 771
963	light pure grey	S 1502-R	63%	1290 214	1287 617
964	medium pure grey	S 2002-R50B	56%	1290 167	1287 446
965	grey	S 3000-N	45%	1290 237	1287 638
967	medium cool grey	S 3502-B	37%	1290 168	1287 606
968	dark cool grey	S 6502-B	15%	1290 171	1287 392
969	light cool beige	S 1505-Y60R	62%	1290 172	1288 255
970	medium cool beige	S 2005-Y50R	54%	1290 200	1289 121
972	light beige	S 1005-Y40R	71%	1290 128	1291 809
973	medium warm beige	S 2005-Y40R	55%	1290 174	1291 352
974	dark warm beige	S 3010-Y40R	39%	1290 175	1287 378
975	light green	S 2010-G30Y	53%	1290 176	1287 401
976	medium green	S 3020-G30Y	37%	1290 177	1287 605
978	light blue	S 2020-R80B	43%	1290 211	1287 613
979	medium blue	S 3030-R80B	27%	1290 205	1287 610
988	clay grey	S 4005-Y50R	31%	1290 203	1287 170

Eclipse Premium Spectra / Acoustic	Colours	NCS No.	LRV	Welding Rods Uni
064	soft steel grey	S 3502-B	37%	1287 459
065	soft grey	S 2500-N	50%	1287 880
066	soft sand	S 1505-Y30R	64%	1287 773
068	soft clay	S 2005-Y50R	54%	1292 393
069	pastel purple	S 2020-R20B	43%	1287 881
070	pastel red	S 1015-Y80R	63%	1287 887
073	pastel orange	S 1020-Y50R	62%	1287 898
076	pastel yellow	S 1020-Y20R	65%	1287 899
077	pastel olive	S 1015-G60Y	70%	1287 900
078	pastel green	S 1015-G20Y	67%	1287 901
079	pastel sky blue	S 1015-B	63%	1287 886
082	pastel blue	S 1015-R80B	63%	1287 902

Primo Premium	Colours	NCS No.	LRV	Welding Rods Multicolour	Welding Rods Uni
600	medium warm grey	S 3502-Y	38%	1290 377	1287 828
625	clay grey	S 4005-Y50R	31%	1290 378	1287 536
631	sand	S 2010-Y30R	56%	1290 379	1287 685
632	dark bric grey	S 5010-Y70R	21%	1290 380	1287 913
638	ocean blue	S 3020-B10G	34%	1290 381	1287 510
639	sky blue	S 2020-B	46%	1290 382	1287 296
640	white olive green	S 1510-G60Y	62%	1290 383	1287 621
641	dark orange	S 2050-Y60R	30%	1290 384	1287 894
651	light pure grey	S 1000-N	74%	1290 152	1287 338
652	grey	S 2500-N	50%	1290 153	1291 811
653	light red	S 2050-Y80R	28%	1290 385	1287 120
654	black	S 8502-B	6%	1290 155	1287 340
655	medium grey beige	S 3005-Y20R	42%	1290 156	1287 012
656	dark warm grey	S 6502-Y	16%	1290 157	1287 333
657	medium cool beige	S 2005-Y50R	54%	1290 158	1292 319
658	medium warm beige	S 2005-Y40R	55%	1290 159	1291 821
659	dark warm beige	S 3010-Y40R	39%	1290 160	1287 292
661	light yellow	S 1020-Y30R	65%	1290 162	1287 416
663	soft purple	S 3030-R20B	26%	1290 386	1287 911
664	soft yellow	S 2020-Y30R	50%	1290 387	1292 372
665	medium blue	S 3030-R80B	27%	1290 164	1288 344
666	dark blue	S 4040-R90B	15%	1290 165	1287 335
667	soft orange	S 2020-Y50R	46%	1290 388	1291 830
668	soft red	S 2020-Y90R	44%	1290 389	1287 914
670	medium pure grey	S 2002-R50B	56%	1290 222	1287 446
671	medium grey	S 4000-N	34%	1290 022	1287 027
672	light warm grey	S 2002-Y50R	56%	1290 220	1292 455
673	medium cool grey	S 4502-B	29%	1290 225	1292 105
674	dark cool grey	S 6502-B	15%	1290 228	1287 077
675	light cool beige	S 1505-Y60R	62%	1290 229	1288 255
676	dark cool beige	S 5005-Y50R	24%	1290 218	1287 237
678	light beige	S 1005-Y40R	71%	1290 232	1287 334
679	light green	S 2010-G30Y	53%	1290 219	1287 401
680	medium green	S 3020-G30Y	37%	1290 059	1287 332
681	dark green	S 4030-G30Y	24%	1290 233	1287 607
682	light blue	S 2020-R80B	43%	1290 234	1287 629

Primo Safe.T	Colours	NCS No.	LRV	Welding Rods Multicolour	Welding Rods Uni
790	light pure grey	S 1000-N	74%	1290 369	1287 411
791	medium pure grey	S 2002-R50B	56%	1290 284	1287 523
792	medium grey	S 4000-N	34%	1290 285	1292 388
793	light warm grey	S 2002-Y	56%	1290 286	1287 630
794	medium cool grey	S 3502-B	37%	1290 287	1292 105
795	dark cool grey	S 6502-B	15%	1290 288	1287 631
796	light cool beige	S 1502-Y50R	64%	1290 289	1287 411
797	medium cool beige	S 1505-Y50R	63%	1290 290	1291 810
798	dark cool beige	S 5005-Y50R	24%	1290 291	1294 089
800	medium warm beige	S 2005-Y40R	55%	1290 293	1291 810
801	dark warm beige	S 3010-Y30R	41%	1290 368	1287 790
802	light green	S 2010-G30Y	53%	1290 295	1287 632
803	medium green	S 3020-G30Y	37%	1290 296	1287 605
805	light blue	S 2020-R80B	43%	1290 370	1287 613
806	medium blue	S 3030-R80B	27%	1290 299	1288 344

Primo SD	Colours	NCS No.	LRV	Welding Rods Multicolour	Welding Rods Uni
561	medium pure grey	S 2002-R50B	56%	1290 274	1291 811
562	medium grey	S 3500-N	39%	1290 275	1287 027
563	dark cool grey	S 6502-B	15%	1290 276	1291 216
564	light cool beige	S 1502-Y50R	64%	1290 277	1290 013
565	medium warm beige	S 2005-Y40R	55%	1290 278	1291 352
567	medium green	S 3020-G30Y	37%	1290 280	1287 332
568	dark green	S 4030-G30Y	24%	1290 281	1287 607
569	medium blue	S 3030-R90B	28%	1290 282	1288 344

Premium Collection

TECHNICAL DATA	STANDARD	ECLIPSE PREMIUM	ECLIPSE ACOUSTIC	PRIMO PREMIUM	PRIMO SAFE.T	PRIMO SD
CLASSIFICATION						
Classification	ISO 10581	Homogeneous vinyl flooring	–	Homogeneous vinyl flooring	–	Static dissipative pressed homogeneous vinyl flooring
	ISO 11638	–	Homogeneous vinyl flooring with foam interlayer	–	–	–
	EN 13845	–	–	–	Slip resistant homogeneous vinyl flooring	–
	EN ISO 10874	34-43	34-42	34-43	34-43	34-43
Wear layer binder content	ISO 10581	Type I	–	Type I	–	Type I
	ISO 11638	–	Type II	–	–	–
TECHNICAL CHARACTERISTICS						
Total thickness	EN ISO 24346	2.0 mm	3.7 mm	2.0 mm	2.0 mm	2.0 mm
Total weight	EN ISO 23997	3000 g/m²	3600 g/m²	3000 g/m²	3000 g/m²	3000 g/m²
Wear layer thickness	EN ISO 24340	–	2.0 mm	–	–	–
Foam layer thickness	EN ISO 24340	–	1.5 mm	–	–	–
Adhesive foil thickness	EN ISO 24340	–	0.2 mm	–	–	–
Surface treatment		PUR reinforced	PUR reinforced	PUR reinforced	Safe.T clean XP™	–
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 lm x 200 cm Classic / Spirit: Art. no. 21020 ___ Spectra: Art. no. 21081 ___	Approx. 23 lm x 195 cm Art. no. 21120 ___ 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21010 ___ 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21013 ___ 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21012 ___ 3 digit colour number
	EN ISO 24342 Tiles (box)	61 x 61 cm - 16 tiles/box = 5.95 m² Classic / Spirit: Art. no. 21021 ___ Spectra: Art. no. 21083 ___	–	61 x 61 cm - 14 tiles/box = 5.21 m² Art. no. 21011 ___ 3 digit colour number	–	61 x 61 cm - 16 tiles/box = 5.95 m² Art. no. 21016 ___ 3 digit colour number
		30 x 30 cm - 50 tiles/box = 4.50 m² Classic / Spirit: Art. no. 21022 ___ Spectra: Art. no. 21084 ___	–	–	–	
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)						
Declaration of Performance	EN 14041	0019-0020-DoP-2013-07	0019-0050-DoP-2013-07	0019-0018-DoP-2013-07	0019-0048-DoP-2013-07	0019-0047-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B_{fl}-s1 ≥ 8 kW/m² Pass	Class B_{fl}-s1 ≥ 8 kW/m² Pass	Class B_{fl}-s1 ≥ 8 kW/m² Pass	Class B_{fl}-s1 ≥ 8 kW/m² Pass	Class B_{fl}-s1 ≥ 8 kW/m² Pass
Electrostatic properties	EN 1815	< 2 kV	–	< 2 kV	< 2 kV	< 2 kV
Thermal resistance	EN 12667/DIN 52612	–	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W
Slip resistance	EN 13893 BS 7976-2	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip
TECHNICAL PERFORMANCES						
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.20 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm
Impact sound reduction	EN ISO 717/2	–	Approx. + 17 dB	–	–	–
Slip resistance	DIN 51130	R9	R9	R9	R10	R9
Clean room test	ASTM F24 F51 ISO 14644-1	Class A –	Class A ISO class 4	Class A ISO class 4	– –	– –
Ease of decontamination	ISO 8690	Good	Good	Good	–	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth	Does not favour growth	Does not favour growth	Does not favour growth	Does not favour growth
Chemical resistance	ISO 26987	Good resistance	Good resistance	Good resistance	Good resistance	Good resistance
Castor chair	ISO 4918	Suitable	Suitable	Suitable	Suitable	Suitable
Flexibility	ISO 24344	Pass	Pass	Pass	Pass	Pass
Dimensional stability	EN ISO 23999	≤ 0.40 % for rolls ≤ 0.25 % for tiles	≤ 0.40 % –	≤ 0.40 % for rolls ≤ 0.25 % for tiles	≤ 0.40 % –	≤ 0.40 % for rolls ≤ 0.25 % for tiles
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Electrical insulation	VDE 0100, Part 600	–	–	–	–	$R_1 \geq 5 \times 10^4 \Omega$
Electrical resistance	EN 1081	–	–	–	–	$R_1 \leq 10^8 \Omega$
Bare foot test	DIN 51097	–	–	–	Class B (≥ 18°)	–
Seam strength	EN 684	– Individual values: ≥ 400 N/50 mm	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm	– Individual values: ≥ 400 N/50 mm	– Individual values: ≥ 400 N/50 mm	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm
Underfloor heating		Suitable - max. 27°C	Suitable - max. 27°C	Suitable - max. 27°C	Suitable - max. 27°C	Suitable - max. 27°C
ENVIRONMENTAL PERFORMANCES						
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum
COLOURS		66	12	36	15	8

The above information is subject to modification for the benefit of further improvement. (05/21). *For information - not binding.
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.
Colours of the products shown in the photos or samples are indicative only. There may be differences in colours, gloss and embossing structure between the products sold and those in pictures.

Eclipse Premium – Eclipse Acoustic – Primo Premium – Primo Safe.T – Primo SD

■ **WESTERN EUROPE: Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ▪ **Belgium:** Tarkett Belux Sprl – Tel. +32 52 26 24 11 ▪ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ▪ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ▪ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ▪ **Germany:** Tarkett Holding GmbH – Tel. +49 62 33 810 ▪ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ▪ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ▪ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ▪ **Netherlands:** Tarkett BV – Tel. +31 416 685 491 ▪ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ▪ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ▪ **Spain:** Tarkett Floors S.L – Tel. +34 91 358 00 35 ▪ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ▪ **Switzerland:** Tarkett Holding GmbH – Tel. +41 043 233 79 24 ▪ **Turkey:** Tarkett Aspen - Tel. +90 212 213 65 80 ▪ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE: Baltic Countries: Estonia:** +372 55 515880 – **Latvia:** +371 26 112014 – **Lithuania:** +370 37 262220 ▪ **Czech Republic:** Tarkett org. složka – Tel: +420 271 001 600 ▪ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ▪ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ▪ **Russian Federation:** ZAO Tarkett RUS - Tel. +7 495 775 3737 ▪ **Slovakia:** Tarkett Polska, organizačná zlozka – Tel. +421 2 48291 317 ▪ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ▪ **Ukraine:** Tarkett UA – Tel: +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA: Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ▪ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ▪ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ▪ **India:** Tarkett Flooring India Pvt. Ltd. – Bangalore - Tel. +91 80 4130 3793 – New Delhi - Tel. +91 11 4352 4073 – Mumbai - Tel. +91 22 2648 8750 ▪ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel: +65 6346 1585 ■ **AFRICA: Tarkett International:** Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST: Tarkett Middle East:** Tel. +961 1 51 3363/4 ▪ **Israël:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA: USA:** Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. + 1 440 543 8916 ▪ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA: Brazil:** Tarkett - Tel. 55 12 3954 7108 ▪ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ▪ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ▪ **Mexico /Central America:** Tarkett Latam Mexico - Tel. +55 11 98410 9310

www.professionals.tarkett.com

Tarkett

Printed on recyclable paper and cardboard
Customs Tariff 48205000000
Premium Collection - 21020 0208 05 - 05-21

Tarkett
Premium Collection
phthalate free 100%



ROLL
TILE

HOMOGENEOUS VINYL

Premium Collection
HOMOGENEOUS VINYL

Combine & Create

Tarkett

PUR treatment reinforces durability
and makes the surface more resistant to heavy traffic and easier to clean.

PUR Reinforced chemical resistance.


Eosin 1% in Ethanol - 2 hours' exposure after cleaning with heavy-duty, spray-and-wipe power cleaner.

Practical hygiene & maintenance
No additional surface treatment needed.
Premium benefits from PUR reinforcement which simplifies cleaning and maintenance.

Traffic resistance
Premium is specifically designed for heavy traffic zones where hygiene and resistance are critical such as schools, hospitals and public buildings.

▪ Residual indentation **0.03** mm*

*Best measured value

Impenetrable heat welding joints.
Impervious surface for maximum hygiene.

Premium collection offers highly flexible flooring solutions for perfect coving results, ensuring an easy and improved maintenance.

Joints resist tearing when stretched using over 400N of force per 50mm

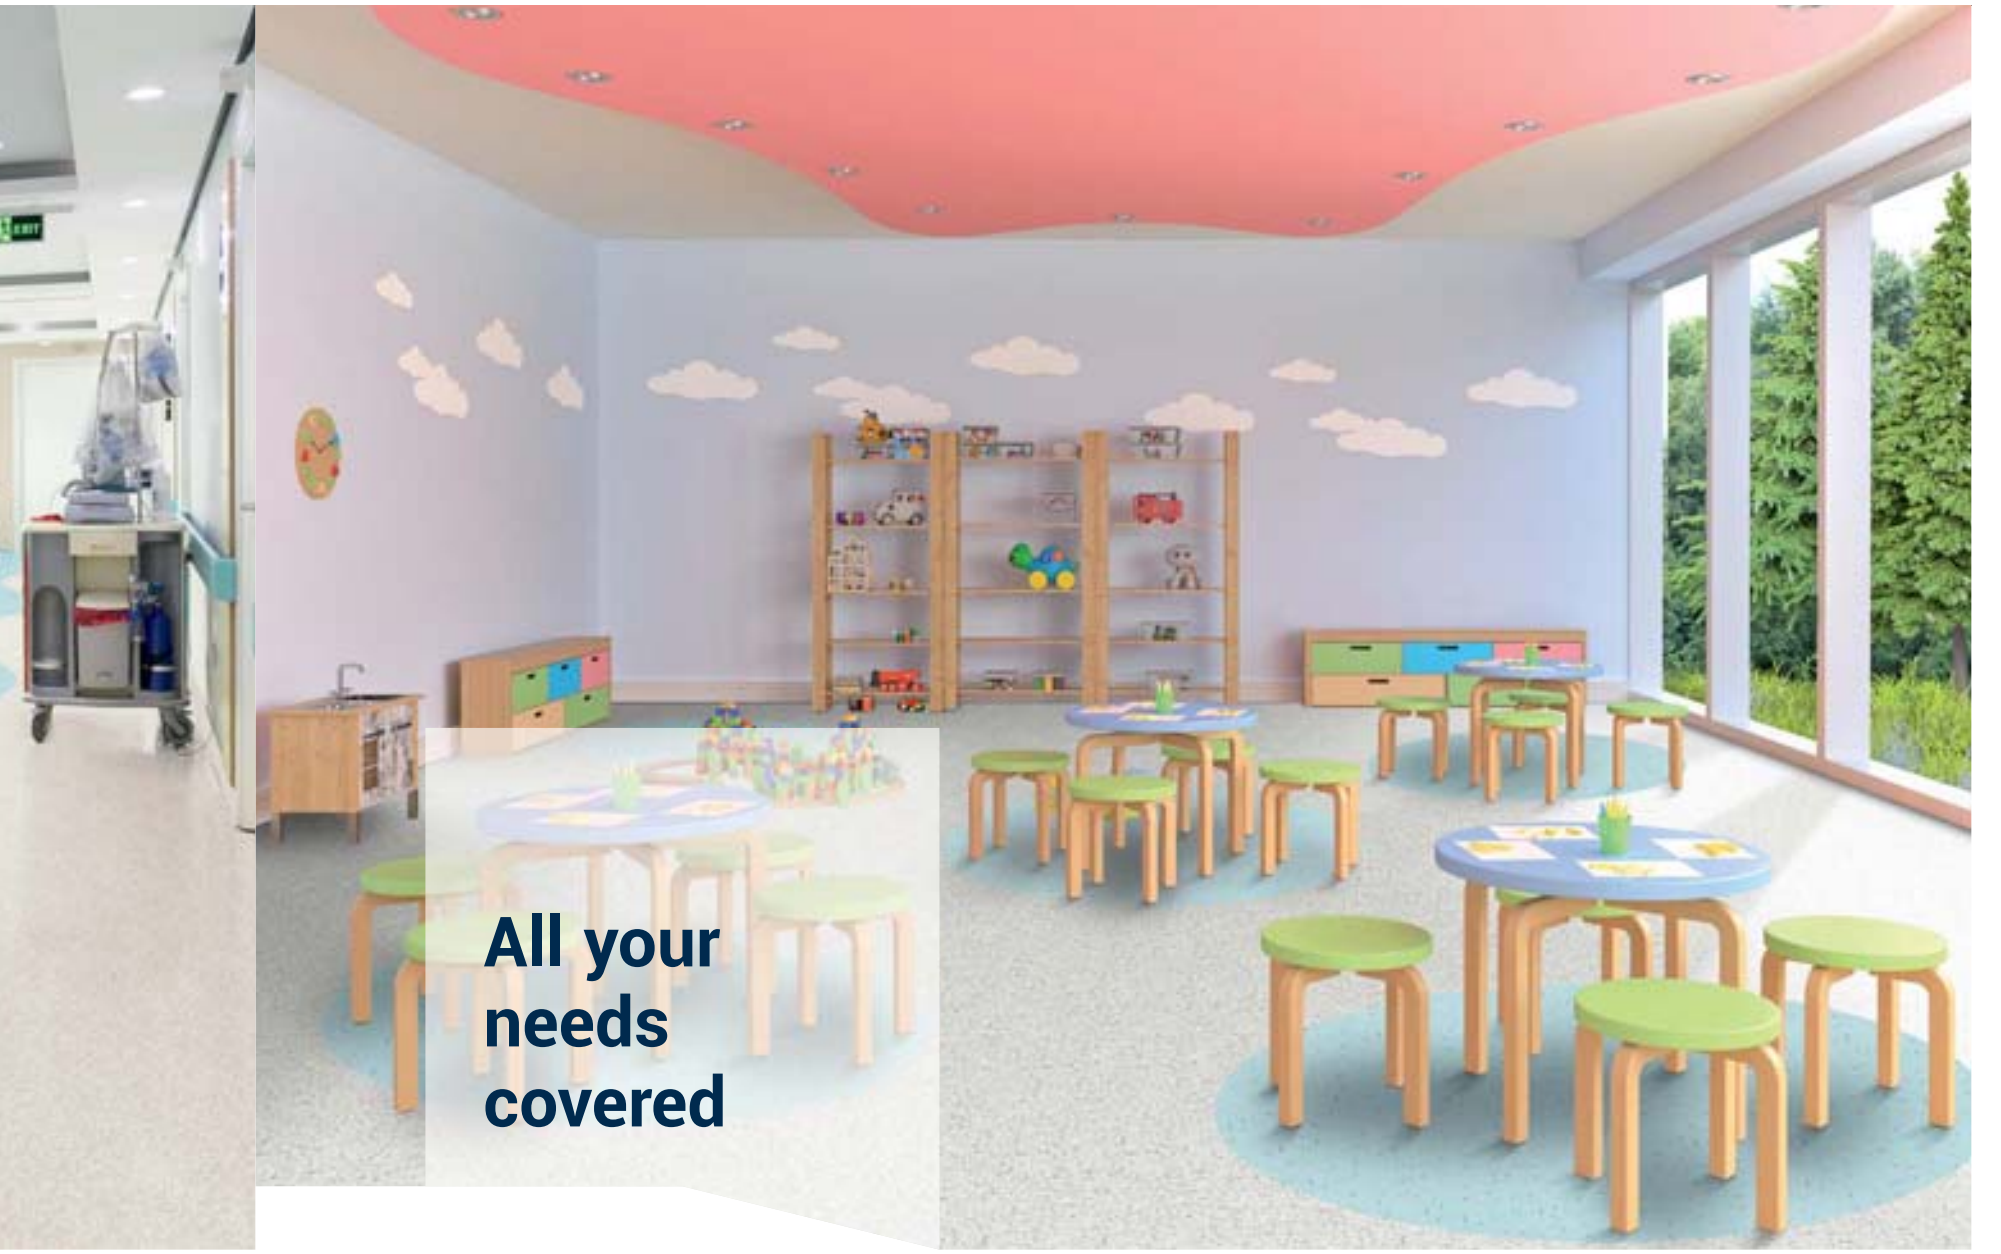

The Premium range is a global solution combining attractive design and functional performance, with options available to cover all your needs.

Attenuated noise
By absorbing noise, Tarkett acoustic floorings take the edge off busy environments and encourage quiet interaction.

Eclipse Acoustic (Spectra colours)
Eclipse Acoustic is available in the 12 Spectra astonishing new colours.

The foam underlayer provides up to **17dB** impact sound reduction and walking comfort.

No slipping
Primo Safe.T, **R10** grip, is available in 15 core matching colours.

Static Dissipative
Primo SD, the static dissipative option is available in 8 core matching colours.

Premium Collection is the perfect tool to customize spaces due to it's versatility and wide range of colours and patterns. Combine floors to imagine new styles and play with shades to create different atmospheres.

A brand new pattern

Now 4 patterns to choose from, for unique combination options and a complete aesthetic.

Colour your world
Choose from a world of colours and coordination possibilities in line with evolving user needs and lifestyle trends.

▪ **102** Colours ▪ **50%** new

Available in rolls and tiles, you can play with multiple shapes and formats.
▪ Tiles : 61 x 61 cm
▪ Tiles : 30 x 30 cm
▪ Rolls : 2 m wide

Multicoloured and Uni welding rods
Unique multicoloured welding rods give the most realistic and seamless look when installed.

Eclipse Premium Classic collection

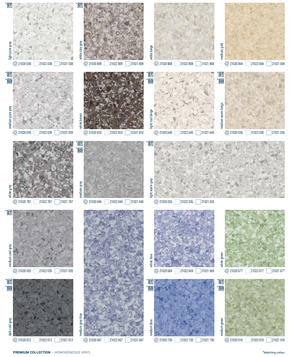

PREMIUM COLLECTION > HOMOGENEOUS VINYL

*Matching colour

Eclipse Premium Spirit collection

*Matching colour

PREMIUM COLLECTION > HOMOGENEOUS VINYL

Eclipse Premium Spirit collection

PREMIUM COLLECTION > HOMOGENEOUS VINYL

*Matching colour

Eclipse Premium Spectra collection

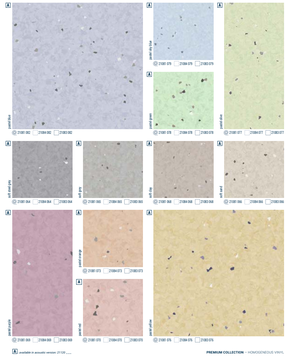

A available in acoustic version (2130 ____)

PREMIUM COLLECTION > HOMOGENEOUS VINYL

Tarkett

Primo Premium

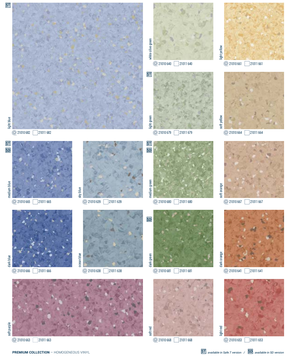

PREMIUM COLLECTION > HOMOGENEOUS VINYL

SD available in Safe T version / SD available in 50' version

Primo Premium

SD available in Safe T version / SD available in 50' version

PREMIUM COLLECTION > HOMOGENEOUS VINYL

Primo Safe.T

PREMIUM COLLECTION > HOMOGENEOUS VINYL

Primo SD

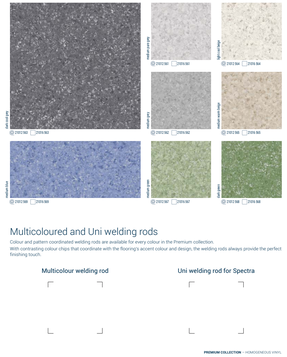

PREMIUM COLLECTION > HOMOGENEOUS VINYL

Multicoloured and Uni welding rods

Colour and pattern coordinated welding rods are available for every colour in the Premium collection.
With contrasting colour chips that coordinate with the flooring's accent colour and design, the welding rods always provide the perfect finishing touch.

Multicolour welding rod

Uni welding rod for Spectra