



Primo Plus 3049 308 / 3049 316

Polystyl collection

TECHNICAL DATA	STANDARD	Primo Plus	Norma	Vylon Plus PUR	Elektra
CLASSIFICATION					
Type of floor coverings	EN ISO 10581	Homogeneous Vinyl Flooring	Homogeneous Vinyl Flooring	Homogeneous Vinyl Flooring	Static Conductive Pressed Homogeneous Vinyl Flooring
Classification	EN ISO 10874	Commercial: 34 Industrial: 43			
Wear Layer binder content	EN ISO 10581	Type I	Type I	Type II	Type I
TECHNICAL CHARACTERISTICS					
Total thickness	EN ISO 24346	2.0 mm			
Wear layer thickness	EN ISO 24340	2.0 mm			
Total weight	EN ISO 23997	2900 g/m²	2790 g/m²	3400g/m²	3000 g/m²
Surface treatment (PUR)	-	PUR Reinforced	PUR Reinforced	PUR	PUR Reinforced
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 running meters x 200 cm	Approx. 23 running meters x 200 cm	Approx. 20 running meters x 200 cm	Approx. 23 running meters x 200 cm
TECHNICAL PERFORMANCES					
Reaction to fire	EN 13501-1	Bfl-s1			
Residual indentation	EN ISO 24343-1				
	Required value	≤ 0.10 mm	≤ 0.10 mm	≤ 0.10 mm	≤ 0.10 mm
	Best measured value*	0.03 mm	0.03 mm	0.04 mm	0.03 mm
Slip resistance	DIN 51130	R9			
Castor Chair	ISO 4918	Suitable			
Chemical resistance	EN ISO 26987	Good resistance			
Bacteria resistance	ISO 846 Part	Does not favour growth			
Total VOC emissions	ISO 16000-9	≤ 10 µg/m3 (after 28 days)			
Flexibility	ISO 24344	-	Pass	-	-
Light Fastness	EN ISO 105-B02	-	≥ level 6	-	-
Dimensional Stability	EN ISO 23999	-	≤ 0.40%	-	-
Seam Strength	EN 684				
	Average value	-	≥ 240 N/50 mm	-	≥ 240 N/50 mm
	Individual Values	-	≥ 180 N/50 mm	-	≥ 180 N/50 mm
Underfloor Heating		-	Suitable max 27°C	-	Suitable max 27°C
Marine Equipment	MPIFTPS Part 5 and 2	-	-	Certified	-
Static Electrical Discharge	EN 1815	-	< 2 kV	-	< 2 kV
Thermal Conductivity	EN 12667	-	Approx. 0.01 m² K/W	-	Approx. 0.01 m² K/W
Electrical Insulation	VDE 0100, Part 600	-	-	-	Ri ≤ 5x10⁴ Ohms
Electrical Resistance	EN 1081	-	-	-	Ri: 5x10⁴ ≤ Ri ≤ 5x10⁴ Ohms
Colours		8	14	6	5

The above information is subject to modification for the benefit of further improvement
For the latest information, please visit our website: www.Tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



www.tarkett-asia.com
Contact: saleshk@tarkett.com



Tarkett

Elektra / Norma / Primo Plus / Vylon Plus PUR



HOMOGENEOUS VINYL FLOORCOVERING


Polystyl collection: Elektra / Norma / Primo Plus / Vylon Plus PUR

HOMOGENEOUS VINYL FLOORCOVERING


Highly resistant
and cost
effective
flooring for
demanding areas



Norma

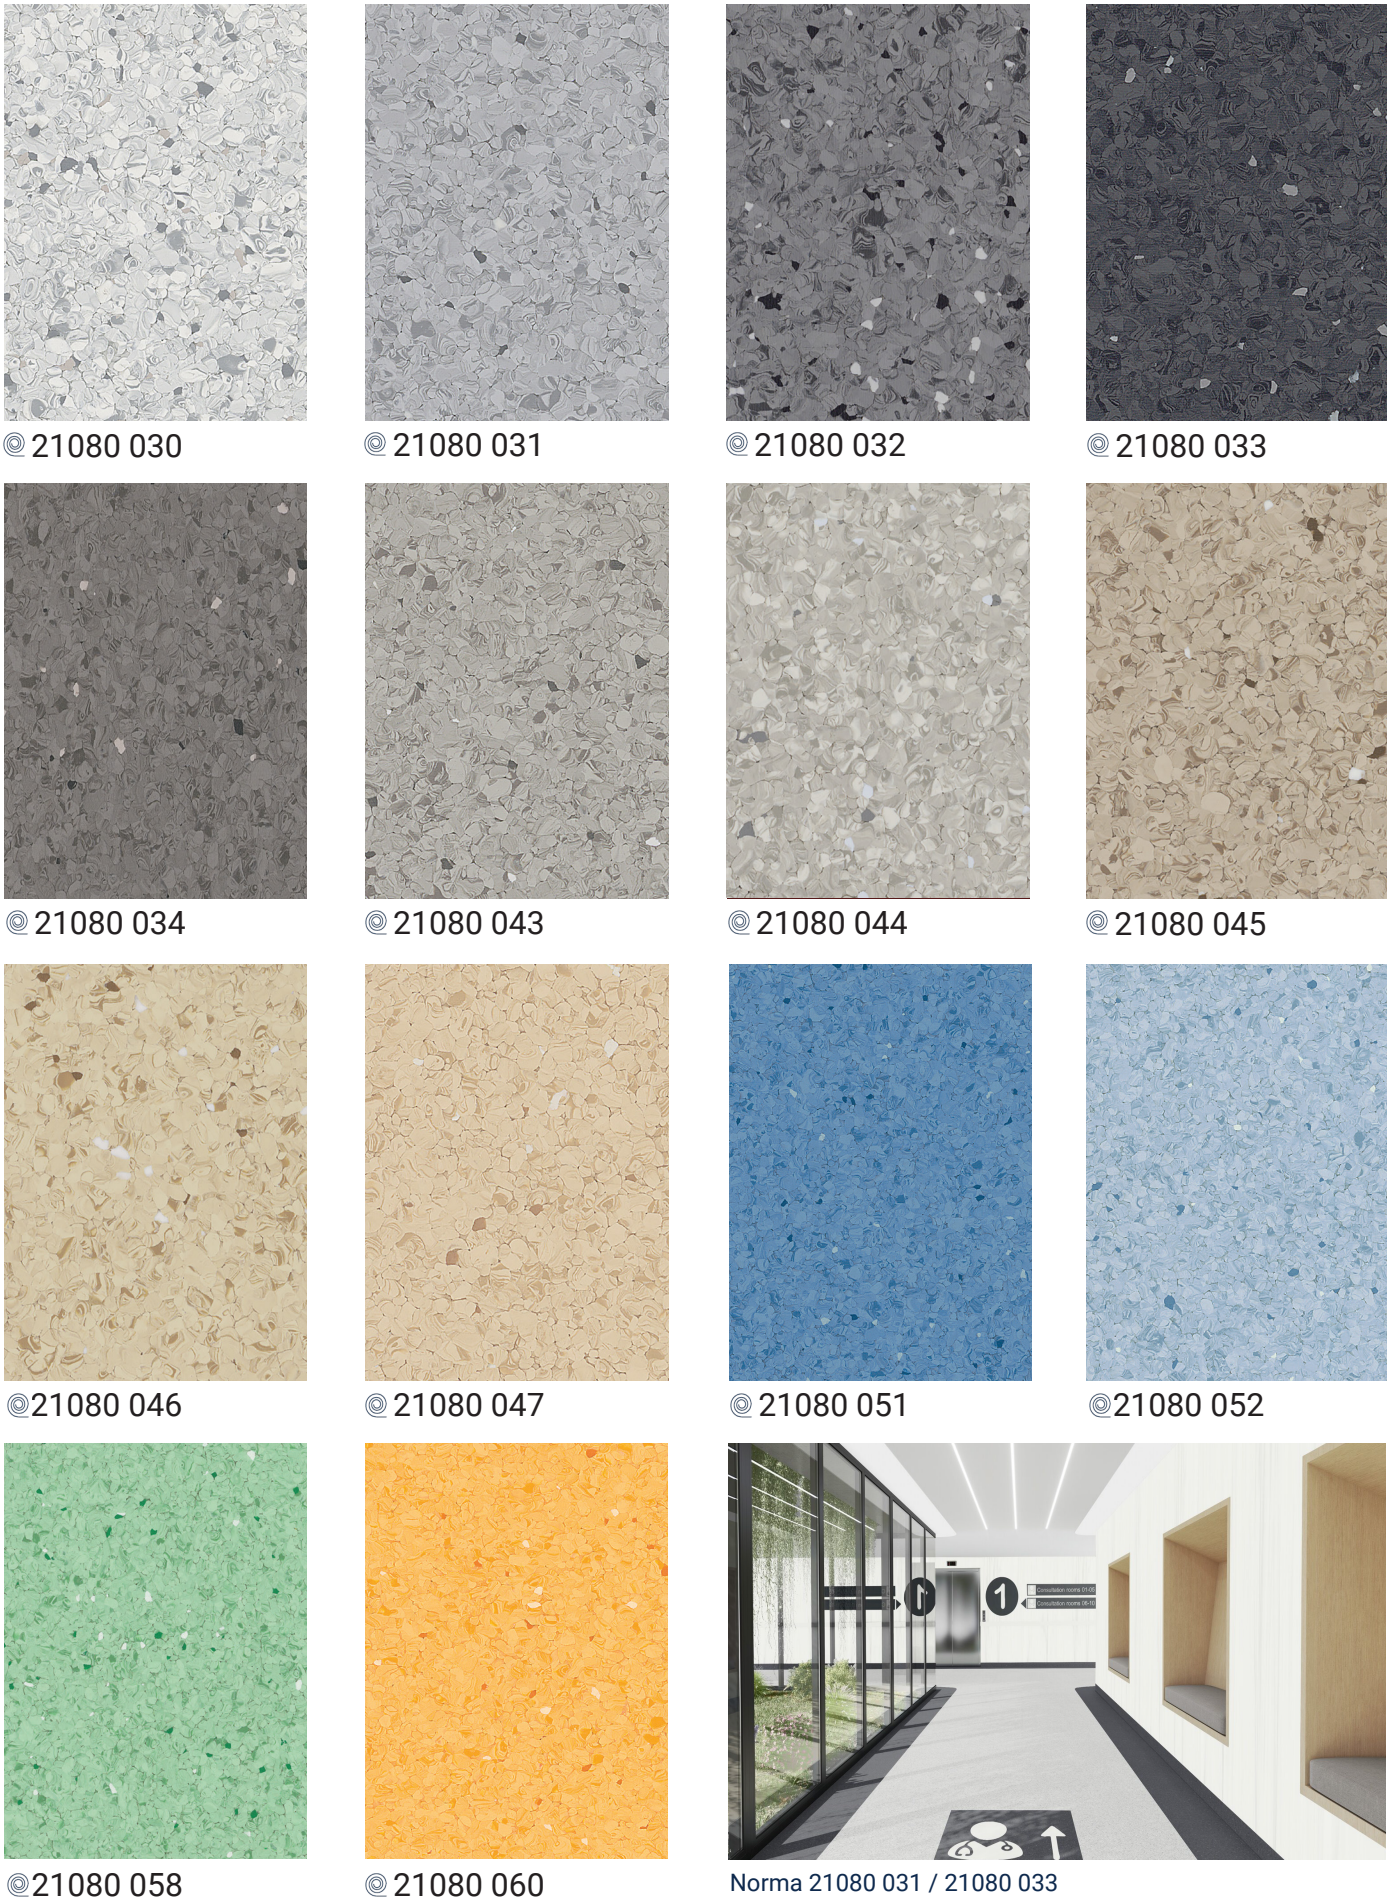

Primo Plus

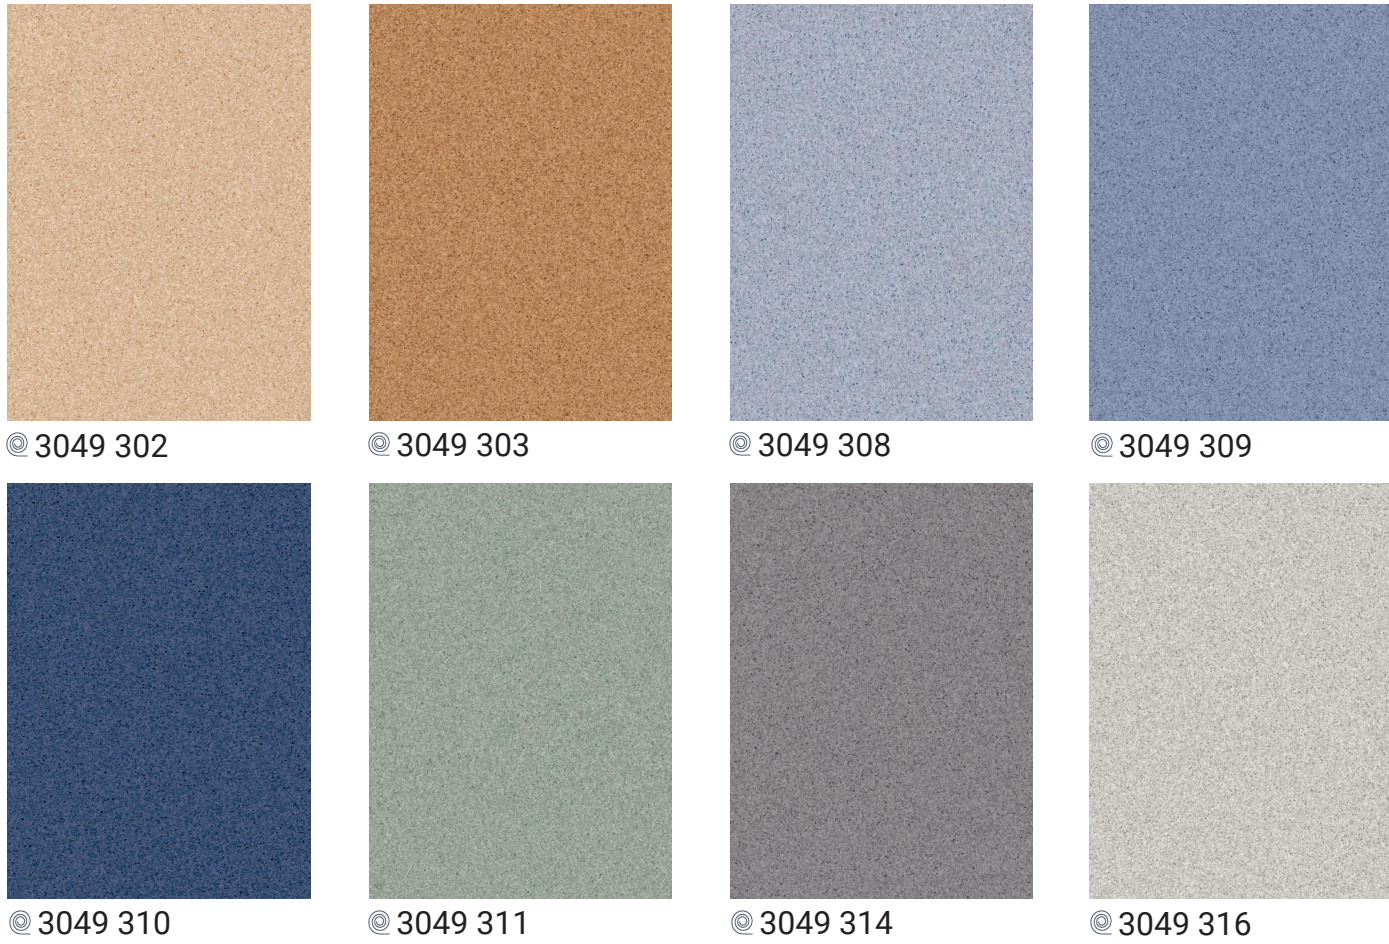

Vylon Plus PUR



Elektra

