

Somplan SD

TECHNICAL DATA	STANDARD	SOMPLAN SD
CLASSIFICATION		
Static Dissipative Homogeneous Compact Vinyl Floorcovering	ISO 10581	
Classification	ISO 10874	Classes:
	Commercial	34
	Industrial	43
TECHNICAL CHARACTERISTICS		
Total thickness	ISO 24346	2.0mm
Dimension - Length	ISO 24341	23lm
Dimension - Width	ISO 24341	2m
Total weight	ISO 23997	3200g/m²
TECHNICAL PERFORMANCES		
Binder content	ISO 10581	Type II
Abrasion group	EN 660-2	Group P
Dimensional stability	ISO 23999	≤ 0.40% (Rolls)
Curl resistance to heat	ISO 23999	≤ 4.00mm
Reaction to fire	EN 13501-1	B _{fl} -s1
Residual indentation	ISO 24343-1 measured value	0.04mm
	ISO 10581 requirement	≤ 0.10mm
Castor chair test	ISO 4918 - EN 425	No damage
Thermal resistance	EN ISO 10456	0.04 (m²·K)/W
Light fastness	ISO 105 B02	≥ 6
Chemical resistance	ISO 26987	Good resistance
Slip resistance	DIN 51130	R9
	EN 13893	μ≥ 0.3
Electrical resistance	EN 1081	R ₁ ≤ 10 ⁸ Ohms
Static electrical charge	EN 1815	≤ 2kV
Bacteria resistance	ISO 846-C	Doesn't favour growth
Flexibility	ISO 24344	20mm
ENVIRONMENT		
TVOC 28 days AgBB test	ISO 16000	< 10ug/m³
Recyclable		100%
Plasticizer		Phthalate-free technology
The above information is subject to modification for the benefit of further improvement. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.		
TARKETT SUSTAINABILITY TAG 100 % Recyclable PHthalate FREE ≤ 10 ug/m³ Optimal Indoor Air quality TVOC 28 DAYS		

Tarkett ROA Sales Offices:

Tarkett Hong Kong Limited
Suite 601B, Empire Centre
68 Mody Road, Tsim Sha Tsui
Kowloon, Hong Kong
Hong Kong SAR
Tel: +852 2511 8716
Email: saleshk@tarkett.com

Tarkett Flooring Singapore Pte.Ltd.
Tel: +65 6346 1585
Email: saleshk@tarkett.com

Tarkett Flooring India Pvt.Ltd.- Bangalore
Tel: +91 80 4130 3793
Email: saleshk@tarkett.com

Tarkett Flooring India Pvt.Ltd. - New Delhi
Tel: +91 11 4352 4073
Email: saleshk@tarkett.com

Tarkett Flooring India Pvt.Ltd. - Mumbai
Tel: +91 22 2648 8750
Email: saleshk@tarkett.com

www.tarkett.com



Somplan SD



STATIC DISSIPATIVE
HOMOGENEOUS COMPACT
VINYL FLOORCOVERING

Somplan SD

STATIC DISSIPATIVE HOMOGENEOUS
COMPACT VINYL FLOORCOVERING

Static Dissipative
homogeneous
compact vinyl
solution for very
sensitive
environments



PANTONE BLUE NAVY 540C C M Y K

Somplan SD
Size: 495 x 310 mm

240 mm

Binder/spine: 15 mm

240 mm

Somplan SD



306008 101



306008 108



306008 115




306008 103



306008 109



306008 116

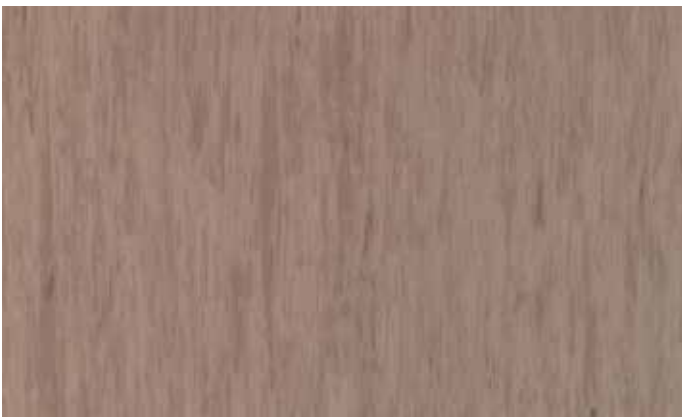

306008 105



306008 112



306008 117



306008 107



306008 114



306008 118

HIGH STATIC PERFORMANCE HOMOGENEOUS VINYL FLOORING

Somplan SD is a Static Dissipative homogeneous vinyl flooring designed for very sensitive environments such as industrial and healthcare areas.

Key features:

- Unique PUR surface treatment for high durability and easy maintenance
- Phthalate-free and very low VOC emissions
- The 12 colourways are colour- and pattern-coordinated with Somplan 100.

Tarkett

PANTONE BLUE NAVY 540C C M Y K

Somplan SD
Size: 495 x 310 mm

240 mm

Binder/spine: 15 mm

240 mm