

Standard Plus

TECHNICAL DATA	STANDARD	STANDARD PLUS 2.0 mm	STANDARD PLUS 1.5 mm
CLASSIFICATION			
Classification	EN ISO 10581	Homogeneous single layered vinyl flooring	Homogeneous single layered vinyl flooring
	EN ISO 10874	Commercial: 34 / Industrial: 43	Commercial: 32 / Industrial: 41
Wear layer binder content	EN ISO 10581	Type II	Type II
TECHNICAL CHARACTERISTICS			
Total thickness	EN ISO 24346	2.0 mm	1.5 mm
Total weight	EN ISO 23997	3300 g/m²	2400 g/m²
Wear layer thickness	EN ISO 24340	2.0 mm	1.5 mm
Surface treatment		PUR	PUR
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 running metres x 200 cm Art. no. 21003 _ _ _ 3 digit colour number	Approx. 25 running metres x 200 cm Art. no. 21004 _ _ _ 3 digit colour number
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)			
Declaration of Performance	EN 14041	0019-0025-DoP-2013-07	0019-0045-DoP-2013-07
Reaction to fire	EN ISO 13501-1	Bfl-s1	Bfl-s1
	EN ISO 9239-1	≥ 8 kW/m²	≥ 8 kW/m²
	EN ISO 11925-2	Pass	Pass
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	 0575	-
Static electrical discharge	EN 1815	< 2,0 kV	< 2,0 kV
Thermal conductivity	EN 12667	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W
Slip resistance	EN 13893	μ ≥ 0,3	μ ≥ 0,3
TECHNICAL PERFORMANCES			
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.04 mm	Required value: ≤ 0.10 mm Best measured value*: 0.04 mm
Slip resistance	DIN 51130	R9	R9
Castor chair	ISO 4918	Suitable	Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Dimensional stability	EN ISO 23999	≤ 0.40%	≤ 0.40%
Chemical resistance	EN ISO 26987	Good resistance	Good resistance
Bacteria resistance	ISO 846 Part C	Does not favour growth	Does not favour growth
Underfloor heating		Suitable - max. 27°C	Suitable - max. 27°C
Seam strength	EN 684	Average value: ≥ 240 N/50mm Individual values: ≥ 180 N/50mm	Average value: ≥ 240 N/50mm Individual values: ≥ 180 N/50mm
ENVIRONMENTAL PERFORMANCES			
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
COLOURS			
		30	7

The above information is subject to modification for the benefit of further improvement. (04/23).

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

*For information - not binding.

Standard Plus	NCS No.	Welding Rod No.	Standard Plus	NCS No.	Welding Rod No.	Standard Plus	NCS No.	Welding Rod No.	Standard Plus	NCS No.	Welding Rod No.	Standard Plus	NCS No.	Welding Rod No.
479	S 2010-Y40R	1287 160	492	S 3020-R90B	1291 210	498	S 3500-N	1287 027	913	S 2010-Y30R	1287 098	919	S 2005-R90B	1291 603
482	S 5005-Y50R	1287 373	493	S 4030-R90B	1287 281	499	S 5500-N	1287 394	914	S 3010-Y40R	1287 597	920	S 5030-R80B	1287 594
483	S 2010-Y20R	1287 039	494	S 3000-N	1294 701	500	S 8502-B	1287 314	915	S 5010-Y50R	1287 380	921	S 4030-G30Y	1287 559
484	S 2020-Y20R	1287 438	495	S 4000-N	1294 071	910	S 2005-Y50R	1292 319	916	S 1050-Y10R	1287 596	922	S 2040-G60Y	1287 592
485	S 2040-Y20R	1287 439	496	S 7005-Y20R	1287 333	911	S 3005-Y50R	1287 291	917	S 1070-Y20R	1287 595	923	S 3010-G10Y	1287 450
488	S 3060-Y80R	1287 441	497	S 1500-N	1287 338	912	S 1005-Y30R	1287 334	918	S 5020-R50B	1287 593	924	S 2000-N	1287 446

■ **WESTERN EUROPE:** **Austria:** Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl - Tel. +32 52 26 24 11 ■ **Denmark:** Tarkett A/S - Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy - Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS - Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH - Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. - Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA - Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett BV - Tel. +31 416 685 491 ■ **Norway:** Tarkett AS - Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA - Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L - Tel. +34 914 951 400 ■ **Sweden:** Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH - Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Turkey - Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd - Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** **Baltic Countries:** **Estonia:** Tel. +372 55 515880 ■ **Latvia:** Tel. +371 26 112014 ■ **Lithuania:** Tel. +370 37 262220 ■ **Czech Republic:** Tarkett.org, slozka - Tel. +420 271 001 600 ■ **Hungary:** Tarkett Polska Sp.z o.o. magyarországi fióktelepe - Tel. +36 1 437 8150 ■ **Kazakhstan:** Tarkett Kazakhstan - Tel. +7 7172 79 00 99 ■ **Poland:** Tarkett Polska Sp. z o. o. - Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS - Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett Polska, organizácia zlozka - Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA:** **Australia:** Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited - Tel. +852 2511 8716 ■ **India:** Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 90 4130 3793 - New Delhi - Tel. +91 11 4852 4073 - Mumbai - Tel. +91 22 2648 8750 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +33 1 41 20 41 01 ■ **ISRAEL:** Tarkett International: +33 1 41 20 41 01 ■ **NORTH AMERICA:** **USA:** Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** **Brazil:** Tarkett Brasil: Tel. 55 12 3954 7108 ■ **Argentina - Chile - Uruguay:** Tarkett Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico / Central America:** Tarkett Mexico - Tel. +55 11 98410 9310



Printed on recyclable paper and cardboard

Customs Tariff: 4820500000

Standard Plus - 21003 0102 05 - 04/23

Standard Plus

ROLL

HOMOGENEOUS
COMPACT VINYL

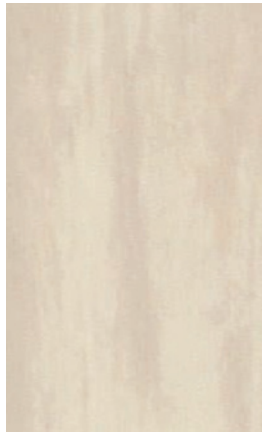
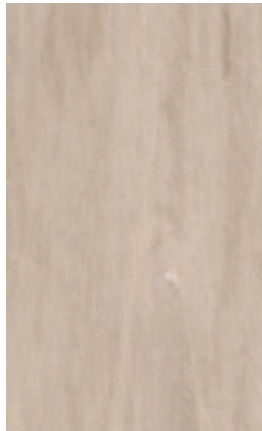
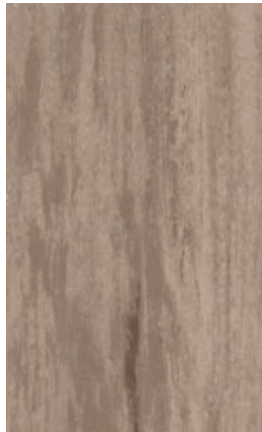
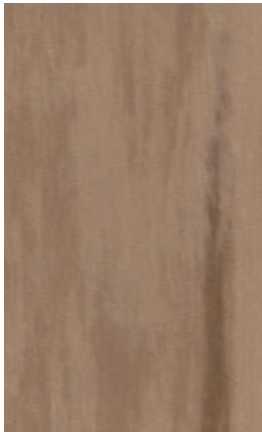
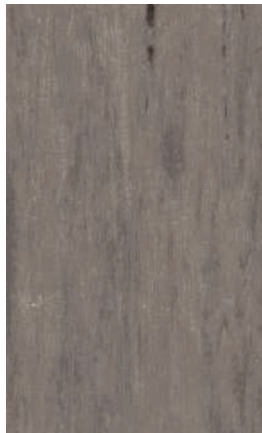
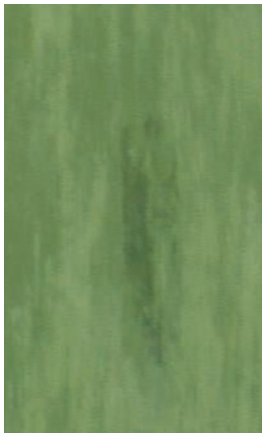
Standard Plus

HOMOGENEOUS COMPACT VINYL

The colourful
linear pattern
for heavy traffic

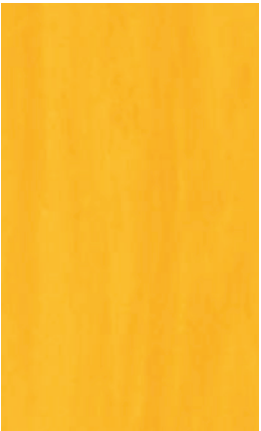


Standard Plus

 910 NCS S 2005-Y50R	 924  NCS S 2000-N	 913  NCS S 2010-Y30R	 912  NCS S 1005-Y30R	 497  NCS S 1500-N
 911  NCS S 3005-Y50R	 498   NCS S 3500-N	 914 NCS S 3010-Y40R	 922 NCS S 2040-G60Y	
 482 NCS S 5005-Y50R	 499 NCS S 5500-N	 915 NCS S 5010-Y50R		
 496 NCS S 7005-Y20R	 500 NCS S 8502-B	 921  NCS S 4030-G30Y	 923 NCS S 3010-G10Y	 494   NCS S 3000-N

 On stock  1.5mm



 919  NCS S 2005-R90B	 492   NCS S 3020-R90B	 493  NCS S 4030-R90B	 920 NCS S 5030-R80B	 918 NCS S 5020-R50B
 485 NCS S 2040-Y20R	 916 NCS S 1050-Y10R	 917 NCS S 1070-Y20R	 488 NCS S 3060-Y80R	
 495  NCS S 4000-N	 479  NCS S 2010-Y40R	 483  NCS S 2010-Y20R	 484 NCS S 2020-Y20R	