


TX Habitat

TECHNICAL DATA	STANDARD	TX HABITAT
CLASSIFICATION		
Classification	EN ISO 10582	Heterogeneous compact floor covering based on polyvinyl chloride
	EN ISO 10874	Commercial: 23 / Industrial: 31
Wear layer binder content	EN ISO 10582	Type I
TECHNICAL CHARACTERISTICS		
Wear layer thickness	EN ISO 24340	0.35 mm
Total thickness	EN ISO 24346	3.00 mm
Total weight	EN ISO 23997	2200 g/m²
PU treatment	EN ISO 23997	TopClean XP™
Form of delivery	EN ISO 24341 (rolls)	Approx. 25 running metres x 200 cm / Art. no. 5626 __ _ 3 digit colour
		Approx. 25 running metres x 300 cm / Art. no. 5625 __ _ 3 digit colour
		Approx. 25 running metres x 400 cm / Art. no. 5624 __ _ 3 digit colour number
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)		
Declaration of Performance	EN 14041	0132-0079-DOP-2019-11
Reaction to fire	EN 13501-1	Cfl-s1
Electrostatic properties	EN 1815	≤ 2 kV on concrete
Thermal resistance	EN ISO 10456	0.05 m² K/W
Slip resistance	EN 13893	μ ≥ 0.3
TECHNICAL PERFORMANCES		
Residual indentation	ISO 24343-1 - EN 433	≤ 0.20 mm
Impact sound reduction	NF EN ISO 717 / 2	ΔL _W = 20 dB
Slip resistance ⁽¹⁾	DIN 51130	R10
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	2 mm
Light fastness	EN ISO 105-B02	≥ 6/8
Dimensional stability	EN ISO 23999	≤ 0.10%
Chemical resistance	EN ISO 26987	High Resistance
Underfloor heating		Suitable
ENVIRONMENTAL PERFORMANCES		
Total VOC emissions	ISO 16000-9	≤ 100 µg/m³ (after 28 days)
COLOURS		
18 ex stock, 32 indent		

The above information is subject to modification for the benefit of further improvement. (11/18).⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations.
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

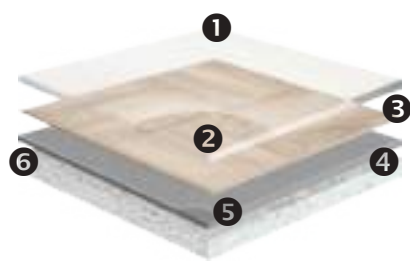

- TX Habitat**
- 1 **TopClean XP™ PUR reinforcement:**
very high resistance to scratch and easy maintenance
 - 2 **Pure PVC transparent wear layer:**
resistance to abrasion
 - 3 **High definition prints:**
for perfect design.
 - 4 **Glass fibre non-woven reinforcement:**
superior dimensional stability
 - 5 **Solid homogeneous calendered sheet made of recycled vinyl:**
resistance to indentation and tearing
 - 6 **High density closed-cell foam backing:**
sound reduction and comfort underfoot.

Logistics Information

 Available in rolls: 2m
Rolls length: 25m

Laying direction:


↑↑

↓↓

WOOD ALLOVER

Tarkett

TX Habitat



PVC HETEROGENEOUS ACOUSTIC

TX Habitat

PVC HETEROGENEOUS ACOUSTIC



25206 009

FRENCH OAK DARK GREY



25206 003

URBAN OAK DARK GREY



25206 017

OAK TREE GREY



25206 004

URBAN OAK LIGHT GREY



25206 015

TREND OAK SNOW WHITE



25206 042

CHAMBRAY CORAIL



25206 044

CHAMBRAY DENIM



25206 002

URBAN OAK BROWN



25206 005

URBAN OAK HONEY



25206 029

KIRUMA PETROL




25206 043

CHAMBRAY AQUA



25206 041

CHAMBRAY ANIS

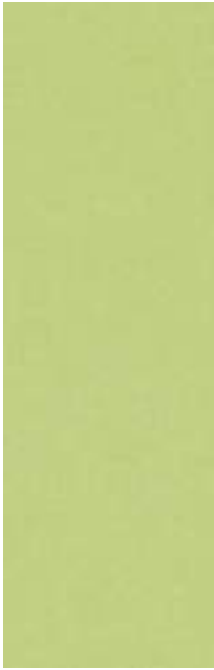

25206 027

KIRUMA WHITE



25206 026

KIRUMA GREY



■ INDENT ONLY

Made in France

25206 001

URBAN OAK NATURAL



25206 016

OAK TREE BEIGE



25206 022

CIMENT MEDIUM GREY



25206 050

FIBER WOOD NATURAL



25206 007

FRENCH OAK BEIGE



25206 028

KIRUMA ANTHRACITE



25206 048

FIBER WOOD LIGHT GREY



25206 036

CASAPALMA BLACK & WHITE



25206 035

CASAPALMA LIGHT BEIGE



25206 049

FIBER WOOD GREGE



25206 038

CASAPALMA TERRACOTTA



25206 033

TERRAZZO MATERA PETROL



25206 039

WOVEN VINYL NATURAL



25206 034

TERRAZZO MATERA OCRE



25m x 2m x 3.0mm

