



Terrazzo Matera graphite 104

Topaz 70 offers a refined collection of warm and natural decors in wood, concrete and ceramic designs to create a reassuring and home-like environment . The range also provides good performance in areas where slip resistance is key. Topaz 70 is available in 2, 3, and 4 meter formats, allowing for seamless installation to suit any space.



PHTHALATE
FREE



Impact sound reduction
14 dB



Better indoor air quality

VOCs 100 µg/m³*

over 10 times lower than the
EU standard EN 16516



Traffic & slip resistance

0.70 mm wearlayer
R10 slip resistance



Easy maintenance

TopClean™ PUR

No wax, no polish



2m, 3m, 4m
rolls for installation flexibility

*After 28 days.

Topaz 70

Classification	Norm	Tarkett value
Product type	ISO 11638	Heterogeneous poly(vinyl chloride) flooring on foam
Wear layer binder content	ISO 11638	Type I
Technical Characteristics	Norm	Tarkett value
Wear layer thickness	ISO 24340	0.70 mm
Backfoam thickness	ISO 24340	1 mm
Total thickness	ISO 24346	2.50 mm
Total weight	ISO 23997	2900 g/m²
PU treatment		TopClean™
Roll Width	ISO 24341	4 + 2 + 3 m
Roll Length	ISO 24341	24 m
Performance for CE Marking	Norm	Tarkett value
Declaration of Performance	EN 14041	0132-0022-DoP-2023-01
Reaction to fire	EN 13501-1	Bfl-s1 glued over any A2fl or A1fl substrate (concrete) Cfl-s1 glued over any derivate wood substrate
Slip resistance	EN 13893 DIN 51130	µ ≥ 0.30 R10
Electrostatical propensity	EN 1815	≤ 2 kV
Furniture leg	ISO 16581	No damage
Castor chair	ISO 4918	No damage
Peeling resistance	ISO 24345	≥ 50 N/50 mm
Curl resultant to heat	ISO 23999	≤ 8 mm
Thermal resistance	ISO 10456	0.02 m² ·K/W
Technical Performance	Norm	Tarkett value
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Impact sound reduction - ΔLw	EN ISO 717/2	14dB
Residual indentation	ISO 24343-1	≤ 0.10 mm
Chemical resistance	ISO 26987	Not affected
Underfloor heating		Suitable (maximum 27°C)
Colour fastness to light	ISO 105-B02	≥ 6
Flexibility	ISO 24344 Method A	No cracking
Seam strength	ISO 16906	≥ 240 N/50 mm
Dimensional stability	ISO 23999	≤ 0.10%
Sustainability, Environment & Indoor Air Quality	Norm	Tarkett value
Recyclable		Yes
Phthalate content		Phthalate-free
TVOC emissions after 28 days	EN 16516	Gold (≤100 µg/m³)
Colours		30

The above information is subject to modification for the benefit of further improvement. (09/22).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

Ref. N°	Welding rods N°	NCS N°	LRV	Ref. N°	Welding rods N°	NCS N°	LRV	Ref. N°	Welding rods N°	NCS N°	LRV	Ref. N°	Welding rods N°	NCS N°	LRV	Ref. N°	Welding rods N°	NCS N°	LRV
005	1287 505	S 4030-Y10R	22.06%	044	1287 378	S 4010-Y30R	27.48%	103	1287 386	S 4030-Y60R	18.31%	106	1292 457	S 4000-N	27.88%	113	1287 690	S 4020-Y10R	26.83%
015	1287 183	S 6000-N	16.77%	045	1287 012	S 3005-Y20R	40.66%	107	1287 742	S 4500-N	22.97%	114	1287 849	S 5005-Y20R	25.24%	115	1287 591	S 5020-Y20R	21.92%
016	1294 209	S 3020-Y20R	39.24%	071	1287 290	S 3502-Y	42.73%	108	1287 591	S 4502-Y	27.74%	115	1287 595	S 5020-Y20R	21.92%	116	1287 566	S 5010-Y30R	25.13%
018	1292 455	S 2005-Y10R	51.22%	074	1287 536	S 4010-Y30R	31.22%	109	1287 525	S 5502-Y	16.92%	116	1287 566	S 5010-Y30R	25.13%	117	1287 790	S 3010-Y30R	35.38%
020	1287 278	S 3502-Y	26.95%	100	1287 831	S 4000-N	32.34%	110	1287 664	S 4020-Y20R	39.67%	117	1287 790	S 3010-Y30R	35.38%	118	1287 572	S 2005-Y50R	41.26%
021	1294 728	S 3010-Y10R	39.87%	101	1287 302	S 4010-Y30R	24.16%	111	1287 690	S 4010-Y10R	26.41%	118	1287 572	S 2005-Y50R	41.26%				
027	1295 538	S 4010-Y10R	29.79%	102	1287 830	S 4005-Y30R	30.08%	112	1287 560	S 5010-Y10R	24.45%								

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 002 • Belgium: Tarkett Belux Sprl – Tel. +32 52 26 24 11 • Denmark: Tarkett A/S – Tel. +45 43 90 60 11 • Finland: Tarkett Oy – Tel. +358 9 4257 0000 • France: Tarkett SAS – Tel. +33 1 41 20 42 40 • Germany: Tarkett Holding GmbH – Tel. +49 69 23 81 • Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 2745 540 • Italy: Tarkett S.p.A. – Tel. +39 0744 7551 • Luxembourg: Tarkett EDL SA – Tel. +352 949 211 8924 • Netherlands: Tarkett BV – Tel. +31 416 685 491 • Norway: Tarkett AS – Tel. +47 92 20 92 00 • Portugal: Tarkett SA – Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. – Tel. +34 914 951 400 • Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH – Tel. +41 043 232 79 20 • Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 • United Kingdom: Tarkett Ltd – Tel. +44 (0) 1022 554 010 • EASTERN EUROPE: Basic Countries: Estonia: +372 55 513880 • Latvia: +371 26 112014 • Lithuania: +370 37 202220 • Czech Republic: Tarkett org srožka – Tel. +420 271 001 001 • Hungary: Tarkett Polska SP. Z O.O. magyarszolg. Kiskorpusz – Tel. +36 1 457 8150 • Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 3727 • Slovakia: Tarkett Polska organizacni zrodla – Tel. +421 2 48291 317 • South East Europe: Tarkett SEE – Tel. +381 21 7557 649 (44) 509 12 21 • Ukraine: Tarkett UA – Tel. +38 (0) 44 35 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 • China: Tarkett Floor Covering (Shanghai) Co. Ltd – Tel. +86 (21) 60 95 68 88 ext 881 • North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3792 – New Delhi – Tel. +91 11 4852 4073 – Mumbai – Tel. +91 22 2648 8700 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ AFROA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 536314 • Israel: Tarkett International: Tel. +93 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 • Canada: Tarkett Inc. – Tel. +1 450 293 1731 ■ LATIN AMERICA: Brazil: Tarkett Brasil: Tel. 55 12 3954 7108 • Argentina • Chile • Uruguay: Tarkett Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia • Colombia • Ecuador • Panama • Paraguay • Peru • Trinidad and Tobago • Venezuela: Tarkett Latam – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 • Mexico /Central America: Tarkett Mexico – Tel. +55 11 98410 9310

www.professionals.tarkett.com



Printed on recyclable paper and cardboard.

Customs tariff: 4820500000

Topaz 70 - 206001 0078 - 06/23



Topaz 70



HETEROGENEOUS
COMPACT VINYL

Topaz 70

HETEROGENEOUS COMPACT VINYL

For a perfect
balance
of comfort
and resistance



Swan blond 117


Topaz 70



Topaz 70



Terrazzo Matera

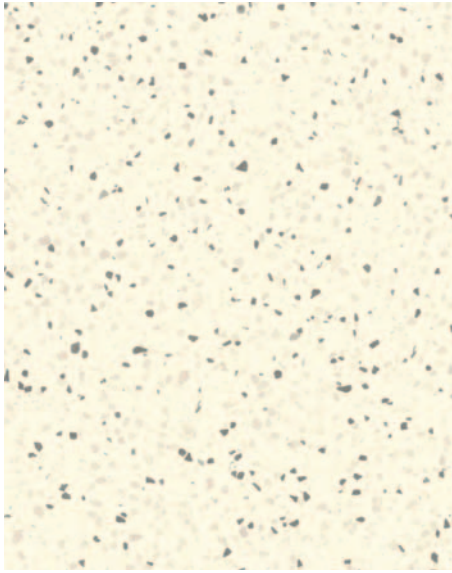

graphite


2m 5626 104

3m 5625 104

4m 5624 104

LRV: 60.42%

Terrazzo Matera

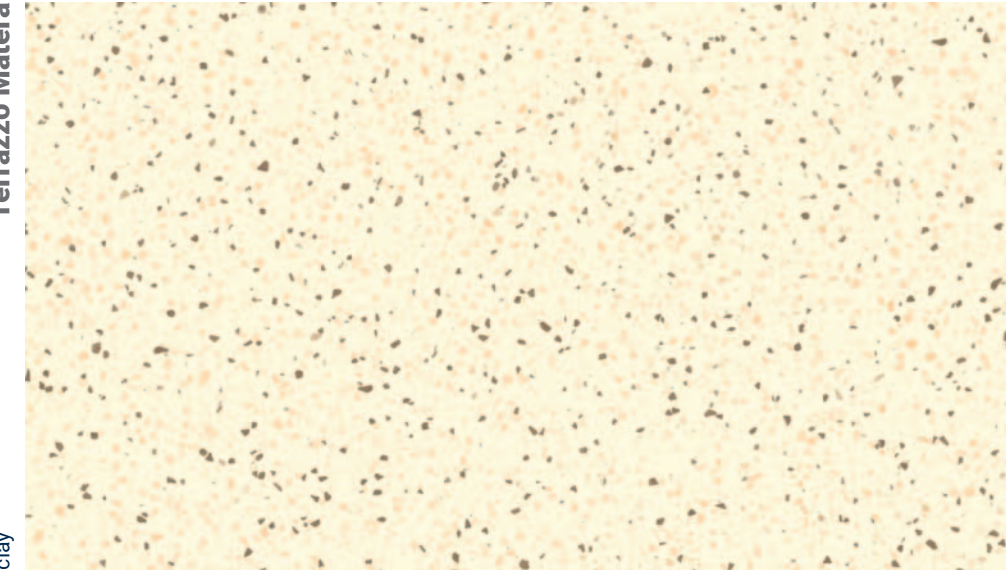

clay

2m 5626 105

3m 5625 105

4m 5624 105

LRV: 61.01%

Clic



clair


2m 5626 018

3m 5625 018

4m 5624 018

LRV: 51.22%

Clic

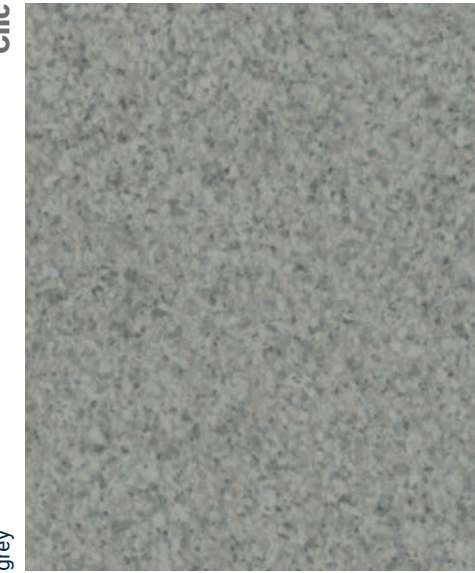

grey


2m 5626 020

3m 5625 020

4m 5624 020

LRV: 26.95%

Clic

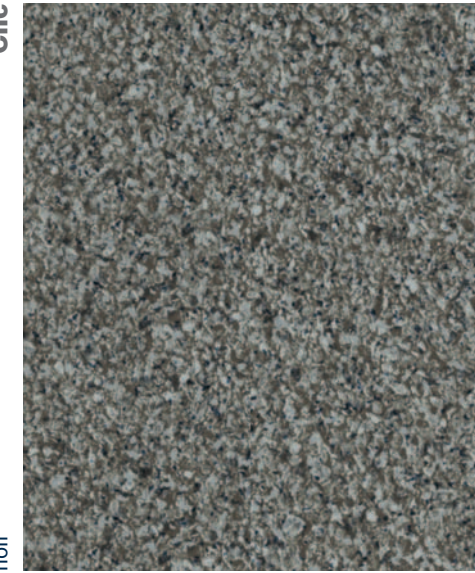

noir

2m 5626 015

3m 5625 015

4m 5624 015

LRV: 16.77%

Clic



warm grey

2m 5626 071

3m 5625 071

4m 5624 071

LRV: 42.73%

Clic



grege

2m 5626 021

3m 5625 021

4m 5624 021

LRV: 39.97%

Clic



beige

2m 5626 016

3m 5625 016

4m 5624 016

LRV: 38.24%

Oro



ashes


2m 5626 100

3m 5625 100

4m 5624 100

LRV: 32.34%

Oro

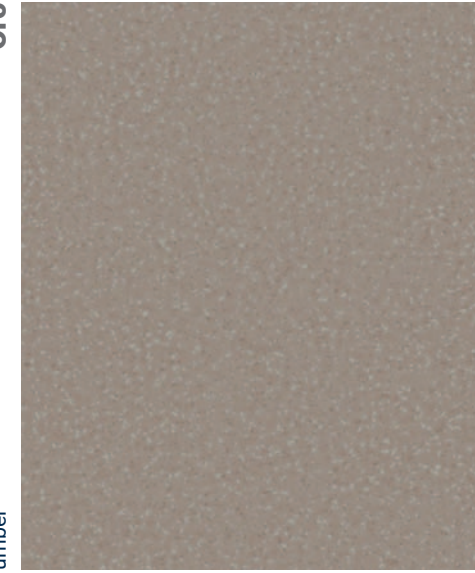

umber

2m 5626 102

3m 5625 102

4m 5624 102

LRV: 30.08%

Oro



terra

2m 5626 103

3m 5625 103

4m 5624 103

LRV: 18.31%

Oro



clay

2m 5626 101

3m 5625 101

4m 5624 101

LRV: 24.16%

Kiruma



cinders

2m 5626 106

3m 5625 106

4m 5624 106

LRV: 27.88%

Kiruma



cobblestone

2m 5626 107

3m 5625 107

4m 5624 107

LRV: 22.97%

Kiruma



burnt sand


2m 5626 108

3m 5625 108

4m 5624 108

LRV: 27.74%

Kiruma

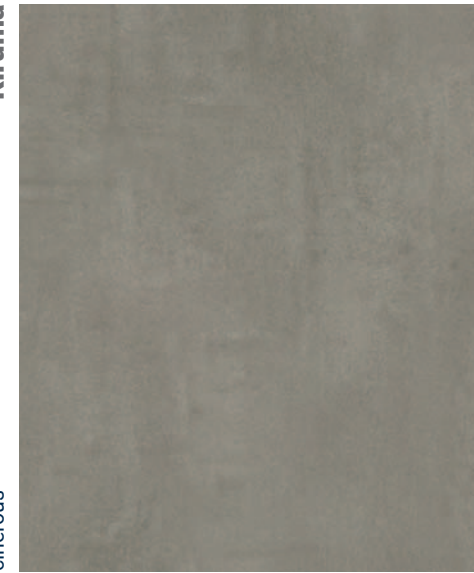

citreous

2m 5626 109

3m 5625 109

4m 5624 109

LRV: 16.92%



Swan



blond

2m 5626 117

3m 5625 117

4m 5624 117

LRV: 35.38%

Swan



russet

2m 5626 115

3m 5625 115

4m 5624 115

LRV: 21.32%

Swan



hazel


2m 5626 116

3m 5625 116

4m 5624 116

LRV: 25.13%

Swan

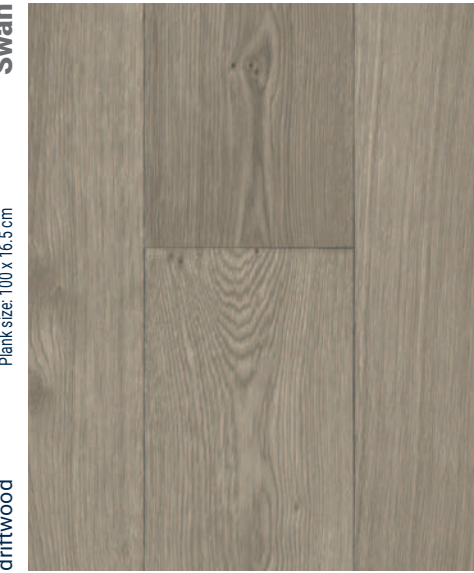

driftwood

2m 5626 114

3m 5625 114

4m 5624 114

LRV: 25.24%

Antik Oak



light natural


2m 5626 027

3m 5625 027

4m 5624 027

LRV: 29.79%

Antik Oak

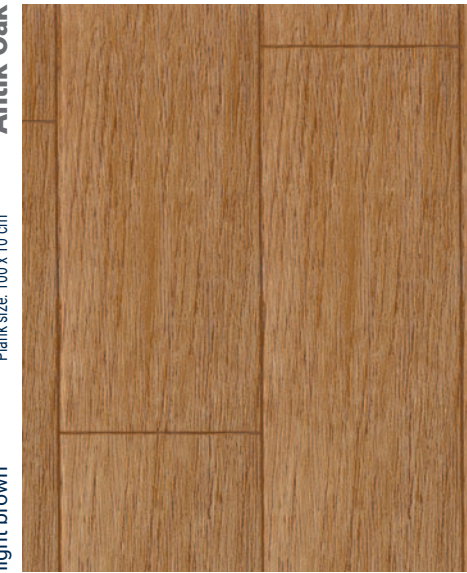

light brown

2m 5626 005

3m 5625 005

4m 5624 005

LRV: 22.06%

Antik Oak



kaolin

2m 5626 118

3m 5625 118

4m 5624 118

LRV: 41.26%

Urban Oak



golden

2m 5626 111

3m 5625 111

4m 5624 111

LRV: 26.41%

Urban Oak



smoked

2m 5626 112

3m 5625 112

4m 5624 112

LRV: 24.45%

Urban Oak



toffee

2m 5626 110

3m 5625 110

4m 5624 110

LRV: 39.67%

Urban Oak



fallow

2m 5626 113

3m 5625 113

4m 5624 113

LRV: 26.83%

Winter Pine



soft beige

2m 5626 044

3m 5625 044

4m 5624 044

LRV: 27.48%

Winter Pine



pebble grey

2m 5626 045

3m 5625 045

4m 5624 045

LRV: 40.66%

Winter Pine



2m 5626 074

3m 5625 074

4m 5624 074

LRV: 31.22%