FLOORING FOR EDUCATION

STOCKED FLOORS DESIGNED FOR LIFE IN EDUCATION



Tarkett

CONTENTS

CARPET

Essence 4
Essence Stripe, Structure, Maze 6
Essence Pure, Roots 8
Stratos 10
Grain 12
Desert 14
Grezzo & Grezzo Vivid 16
Recharge & Retrace 18
Linon 20
Fields 22
Tactile Craft 24
AirMaster Classic, Earth & Sphere 26

HETEROGENOUS VINYL

Contract Wood 28
Safetred Wood 30
Safetred Universal 32
Safetred Spectrum 34
Safetred Serenity 36

HOMOGENEOUS VINYL

Eclipse Premium 38
Primo Premium 40
Primo Safe.T 42

LUXURY VINYL TILES

Essence 55 44
Classics 55 46

ACCESSORIES

Embond 170 Adhesive 48
Tarkomat Entrance Matting 50

SUSTAINABILITY

Our Approach 52
ReStart® 54



RELIABLE, RESPONSIBLE, READY

Whatever the requirement; new build or refurbishment, we have a flooring solution stocked and ready to ship within 24 hours of order placement(1).

To meet the needs of education spaces, all floors featured carry the usual hallmarks of a Tarkett material; responsibly produced, incredibly durable, and easy to maintain.

FLOORING DESIGNED FOR LIFE IN EDUCATION

Pupils of all ages learn better in inspiring, comfortable and safe environments.

Our sustainable flooring provides high levels of hygiene, comfort and indoor air quality as well as durability, and ease of maintenance.

Our solutions are suitable for all kinds of educational facilities, from nurseries and classrooms to libraries and laboratories, we aim to help enable the next generation to thrive.

Floors in this collection offer:

- Low or ultra-low VOC emissions
- Phthalate free formulations
- Fine dust capturing capability
- Commercially graded durability
- End-of-life recyclability after a life well served.

ReStart by Tarkett

VOC ULTRA-LOW **EMISSIONS**

PHTHALATE **FREE**

Essence

CARPET TILES



Created with versatility in mind, the hard-wearing and highly functional DESSO Essence acts as the building block in a portfolio of four carpet collections designed to fit seamlessly together. The plain loop Essence tile comes with a classic colour palette, all of which are integrated throughout the DESSO Essence Maze, DESSO Essence Structure and DESSO Essence Stripe ranges.



ESSENCE AA90 9005
LRV: 14%
Ref. 711446018



ESSENCE AA90 9502
LRV: 5%
Ref. 711446023



ESSENCE AA90 9504
LRV: 11%
Ref. 711446025



ESSENCE AA90 8413
LRV: 8%
Ref. 711446015



ESSENCE AA90 8803
LRV: 6%
Ref. 711446016



ESSENCE AA90 9981
LRV: 5%
Ref. 711446031



ESSENCE AA90 2925
LRV: 16%
Ref. 711446004



ESSENCE AA90 3842
LRV: 3%
Ref. 711446006



ESSENCE AA90 9507
LRV: 14%
Ref. 711446026



ESSENCE AA90 9515
LRV: 21%
Ref. 711446027

ESSENCE AA90 2915
LRV: 23%
Ref. 711446002



ESSENCE AA90 9031
LRV: 2%
Ref. 711446019



ESSENCE AA90 9036
LRV: 15%
Ref. 711446020



ESSENCE AA90 9092
LRV: 7%
Ref. 711446021



ESSENCE AA90 9095
LRV: 18%
Ref. 711446024



ESSENCE AA90 9523
LRV: 14%
Ref. 711446028



ESSENCE AA90 9926
LRV: 21%
Ref. 711446029



ESSENCE AA90 9975
LRV: 9%
Ref. 711446030



ESSENCE AA90 9096
LRV: 11%
Ref. 711446022



ESSENCE AA90 9991
LRV: 2%
Ref. 711446032

KEY FEATURES

- Classic design for ease of application
- Four laying directions
- Colour matched to Essence Maze, Stripe and Structure

TECHNICAL SPECIFICATION

- Tufted Construction
- Solution Dyed Nylon
- DESSO ProBase® backing as standard















DESSO

Essence Stripe
Essence Structure
Essence Maze

CARPET TILES

DESSO Essence Stripe, Structure and Maze have been designed to offer a hard-wearing design tile for high traffic environments. Each tile has been designed to work seamlessly with Essence, offering easy-to-apply design.



STRIPE AA91 9502
LRV: 8%
Ref. 711458011

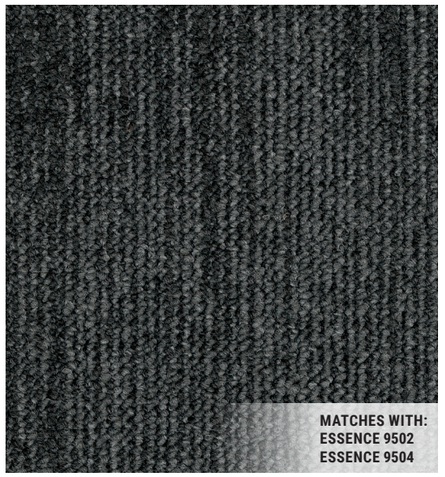

STRUCTURE AA92 9505
LRV: 7%
Ref. 711464008



STRUCTURE AA92 9504
LRV: 16%
Ref. 711464009

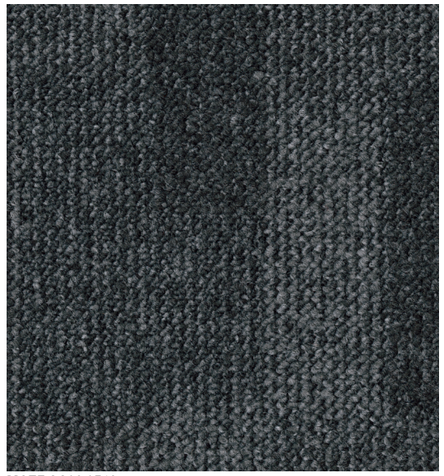

MAZE AA93 9513
LRV: 7%
Ref. 711452012

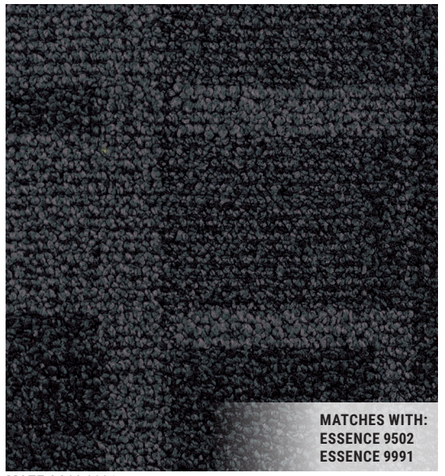

MAZE AA93 9991
LRV: 3%
Ref. 711452013

KEY FEATURES

- Classic designs for ease of application
- Colour matched with Essence

TECHNICAL SPECIFICATION

- Tufted Construction
- Solution Dyed Nylon
- DESSO ProBase® backing as standard

STRIPE & STRUCTURE

MAZE

33

Essence Pure
Essence Roots

CARPET TILES

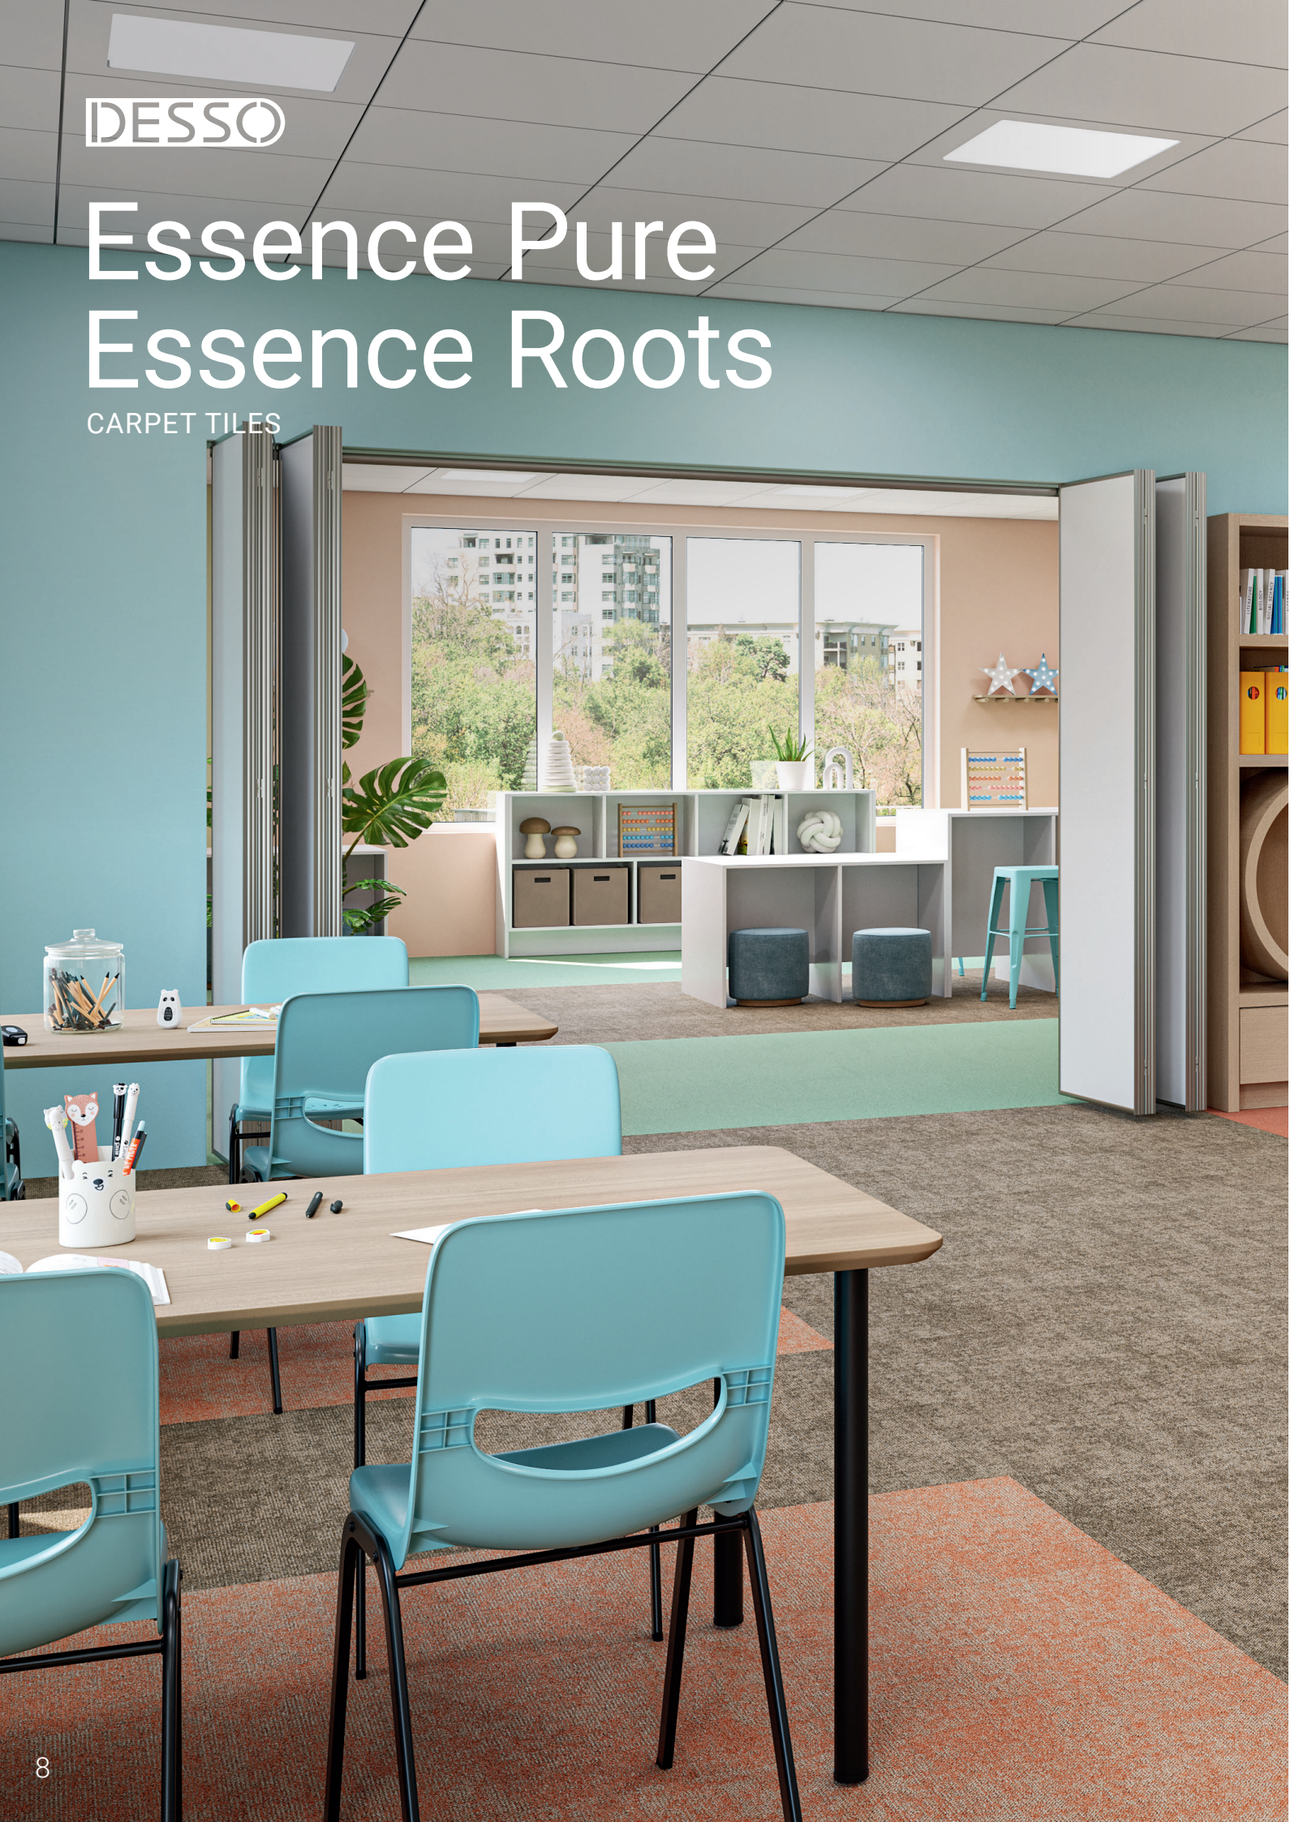

Continuing the legacy of the DESSO Essence family, Essence Pure and Essence Roots offer the same high quality and lasting durability with fresh colours and modern patterns. Each tile in the Essence Roots collection has been designed to work with Essence Pure, offering value for money and easy-to-apply design for high traffic environments.



PURE AD07 9044-V
LRV: 26%
Ref. 712128020



PURE AD07 9104-V
LRV: 17%
Ref. 712128022



PURE AD07 9960
LRV: 13%
Ref. 712128029



PURE AD07 9531
LRV: 4%
Ref. 712128026



PURE AD07 9512
LRV: 7%
Ref. 712128024



PURE AD07 9945-V
LRV: 20%
Ref. 712128028



PURE AD07 9111
LRV: 8%
Ref. 712128023

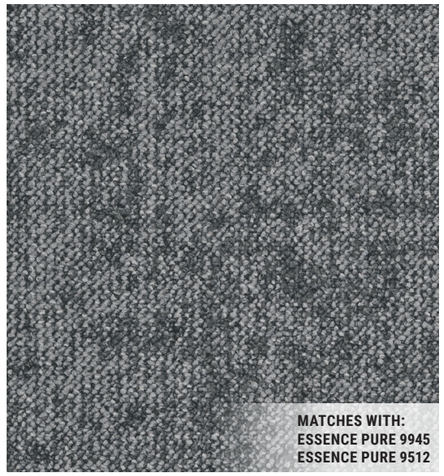

ROOTS AD08 9513
LRV: 15%
Ref. 712137010

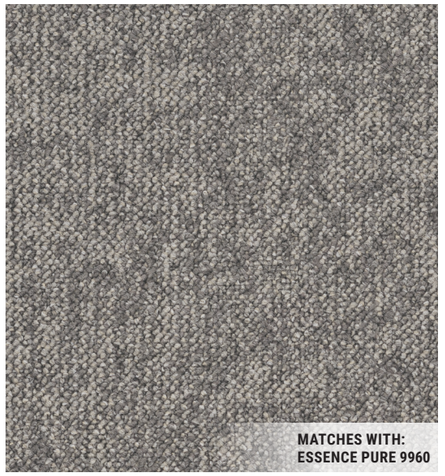

ROOTS AD08 9961-V
LRV: 20%
Ref. 712137013



ROOTS AD08 9851
LRV: 5%
Ref. 712137012

KEY FEATURES

- Refreshed colours and designs
- Combine Essence Pure with Essence Roots

TECHNICAL SPECIFICATION

- Tufted Construction
- Solution Dyed Nylon
- DESSO ProBase® backing as standard



Stratos

CARPET TILES

DESSO Stratos provides a cost effective, fully recyclable flooring solution designed for true circularity. A hard-wearing solution, Stratos is made using Econyl® and DESSO EcoBase®, which can be separated and recycled after a life well served. Its level-loop construction provides durability and longevity for high-traffic use in commercial spaces.



STRATOS A138 9930-V
LRV: 22%
Ref. 710034015



STRATOS A138 9955
LRV: 14%
Ref. 710034008



STRATOS A138 9975
LRV: 7%
Ref. 710034005



STRATOS A138 9986
LRV: 6%
Ref. 710034041



STRATOS A138 9097
LRV: 15%
Ref. 710034039



STRATOS A138 9505-V
LRV: 17%
Ref. 710034062



STRATOS A138 9990
LRV: 4%
Ref. 710034014



STRATOS A138 9522
LRV: 10%
Ref. 710034064

KEY FEATURES

- Hard-wearing tile for commercial environments
- Timeless colour palette for ease of application
- Variety of laying patterns

TECHNICAL SPECIFICATION

- Solution Dyed Nylon
- Level Loop Construction
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint: 0.83kg CO_2e/m^2



DESSO

Grain

CARPET TILES

Owing to its organic high/low pile structure, **DESSO Grain** adds subtle movement to the space softening any sharp edges of the interior by introducing natural shapes.



GRAIN B867 9501
LRV: 7%
Ref. 710550010

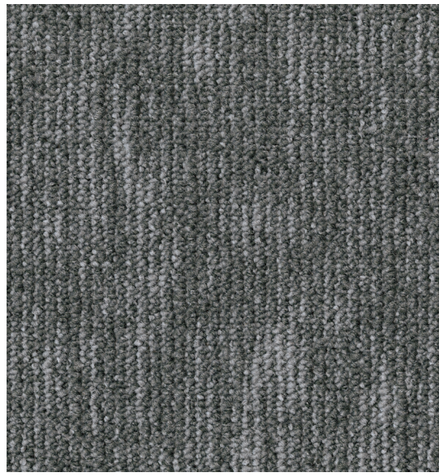

GRAIN B867 9506
LRV: 13%
Ref. 710550011

KEY FEATURES

- Organic, directional pattern
- Tone-on-tone design

TECHNICAL SPECIFICATION

- Tufted Construction
- Solution Dyed Nylon
- DESSO ProBase® backing as standard

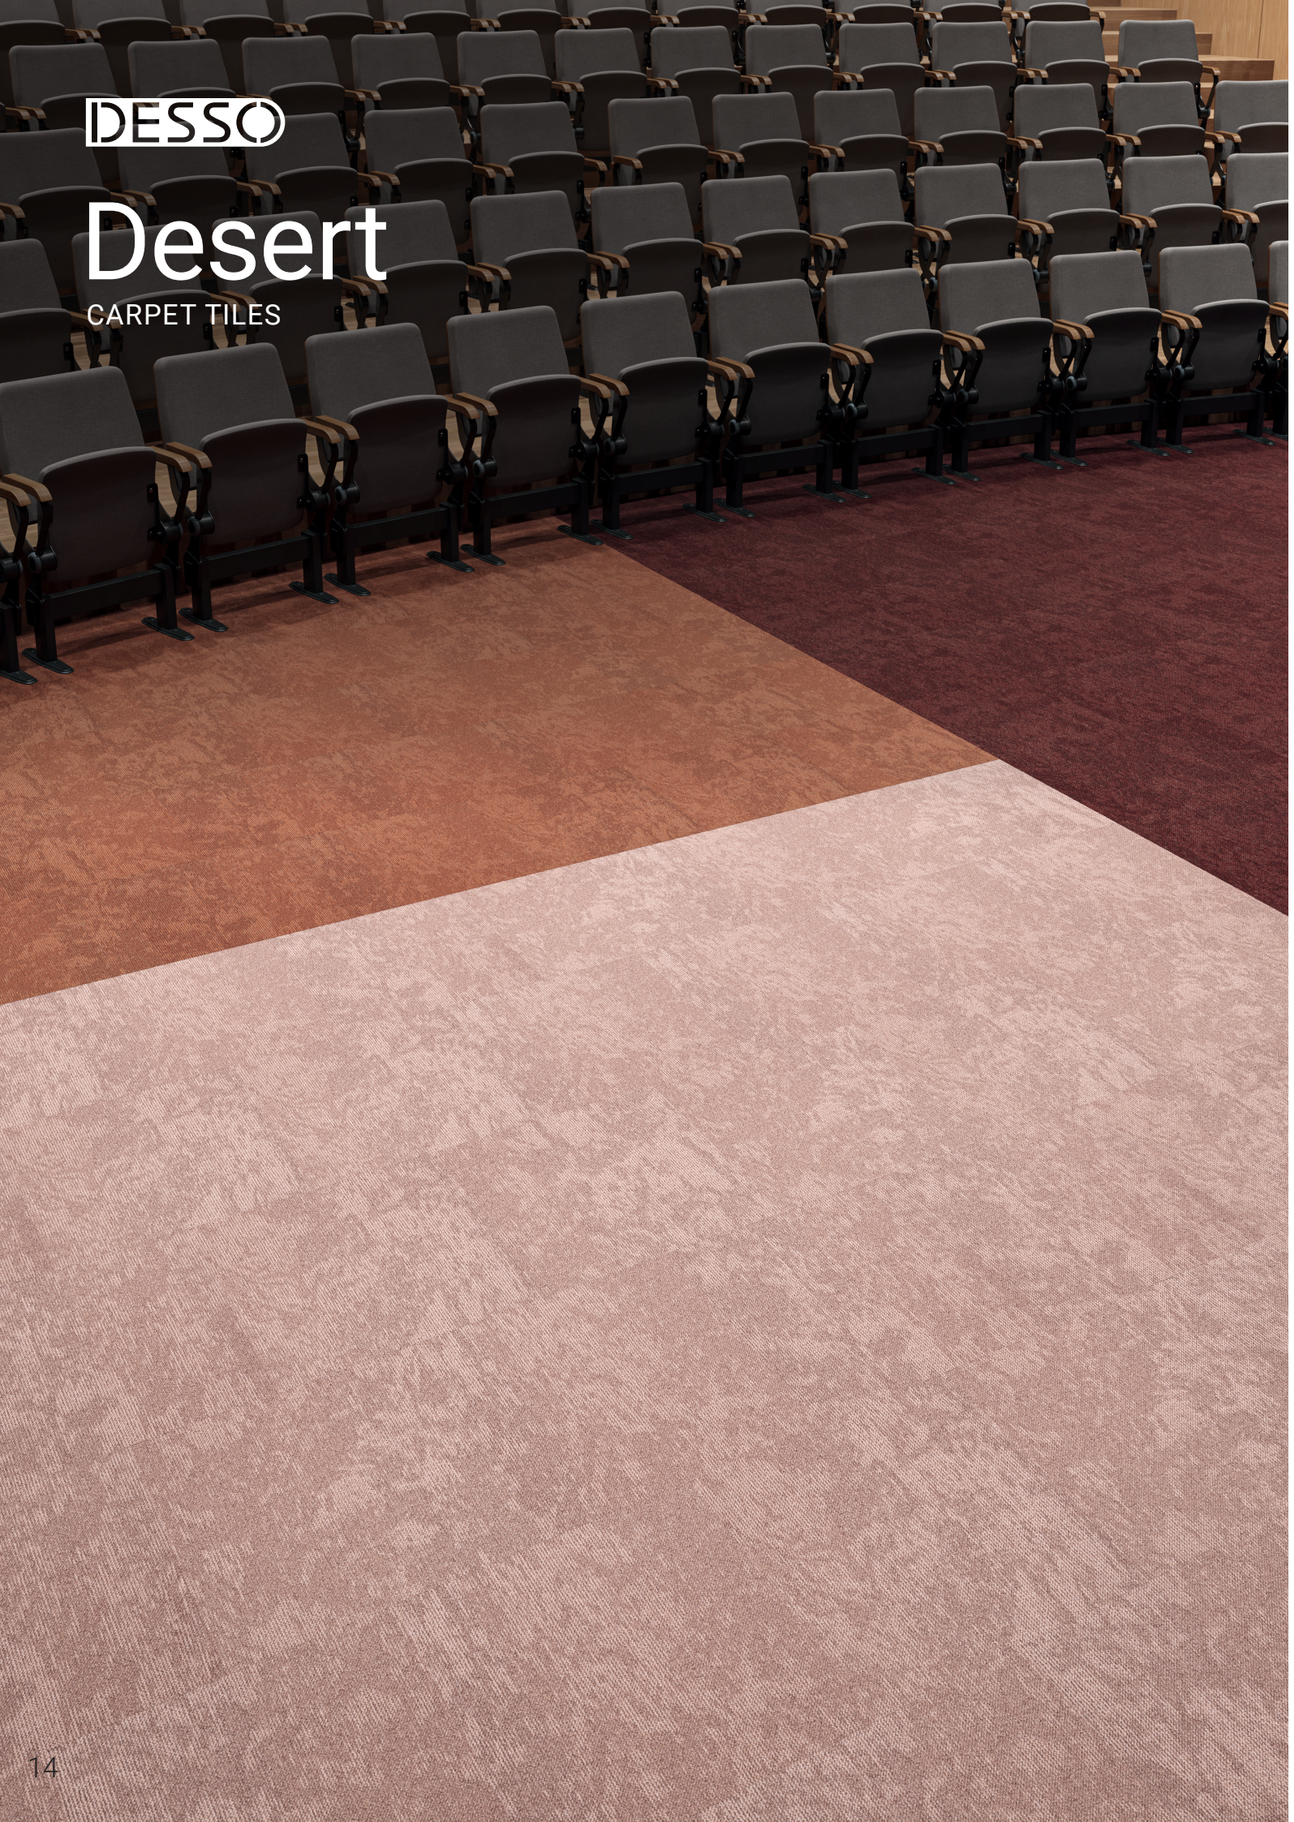

DESSO

Desert

CARPET TILES

DESSO Desert lends a feeling of vast, open spaces to the indoors with its subtly layered organic design. Like the shifting sands of the desert, this textured carpet tile collection allows you to play with the space to create a serene flooring scheme. Designed for random lay installation, Desert requires minimal effort to achieve a great looking floor.



DESERT AC89 1321-V
LRV: 32%
Ref. 712089001



DESERT AC89 2914-V
LRV: 19%
Ref. 712089005



DESERT AC89 9523
LRV: 14%
Ref. 712089023



DESERT AC89 9093
LRV: 6%
Ref. 712089019



DESERT AC89 9516
LRV: 10%
Ref. 712089021



DESERT AC89 9508-V
LRV: 21%
Ref. 712089020



DESERT AC89 9518-V
LRV: 25%
Ref. 712089022

KEY FEATURES

- Organic, easy-to-apply design
- Random lay installation

TECHNICAL SPECIFICATION

- Tufted Construction
- Solution Dyed Nylon
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint: 1.80kg CO_2e/m²

CERTIFIED cradle to cradle BRONZE

33

B_{fl}-s1

RECYCLABLE OFFCUTS & POST-USE

DESSO

Grezzo
Grezzo Vivid

CARPET TILES



DESSO Grezzo and Grezzo Vivid celebrate the untouched beauty of the world's natural rocky landscapes and supports Tarkett's ongoing commitment to protect the planet's fragile natural resources. The rugged, irregular weave forms an untamed, rock-ribbed texture, adding depth and natural movement to expansive spaces.

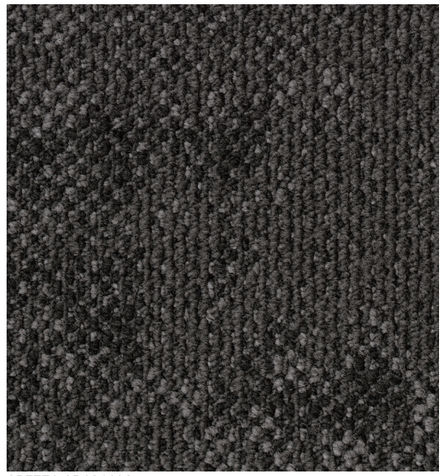

GREZZO AB64 9024
LRV: 8%
Ref. 711793008



GREZZO AB64 9027-V
LRV: 26%
Ref. 711793009



GREZZO AB64 9033
LRV: 7%
Ref. 711793010



GREZZO AB64 9106-V
LRV: 20%
Ref. 711793012



GREZZO AB64 9930-V
LRV: 32%
Ref. 711793013

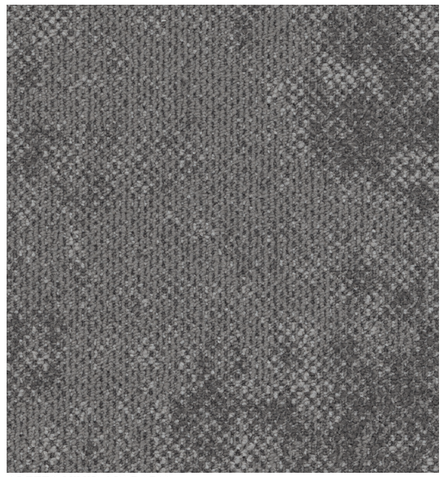

GREZZO VIVID AD05 9523
LRV: 16%
Ref. 712117006

KEY FEATURES

- Chunky texture
- Easy to apply design with random lay installation
- Inspired by natural landscapes for calming interiors

TECHNICAL SPECIFICATION

- Tufted Construction
- Solution Dyed Nylon
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint: 2.51kg CO_2e/m^2



DESSO

Recharge Retrace

CARPET TILES

DESSO Recharge and Retrace take their design inspiration from the closed-loop recycling process itself. Recharge offers sharper lines with a tone-on-tone design, while Retrace offers an organic, irregular appearance. Both tiles are suitable for high-traffic environments and are designed to be easily applied with a variety of laying patterns.



RECHARGE AC41 9098-V
LRV: 31%
Ref. 711993003



RECHARGE AC41 9096-V
LRV: 22%
Ref. 711993002



RECHARGE AC41 9504
LRV: 12%
Ref. 711993005



RECHARGE AC41 9082
LRV: 9%
Ref. 711993020



RECHARGE AC41 9526-V
LRV: 22%
Ref. 711993004



RETRACE AC63 9098-V
LRV: 32%
Ref. 712025016

KEY FEATURES

- Two patterns designed for seamless combination
- Highly sustainable

TECHNICAL SPECIFICATION

- Tufted Construction
- 100% Recycled Solution Dyed Nylon
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint:
  1.12kg CO_2e/m² – Recharge
  0.90kg CO_2e/m² – Retrace

RETRACE RECHARGE



DESSO

Linon

CARPET TILES

Inspired by the enduring charm and tactility of irregular woven fabrics, the DESSO Linon carpet tile collection helps you craft welcoming interiors that nurture creativity.

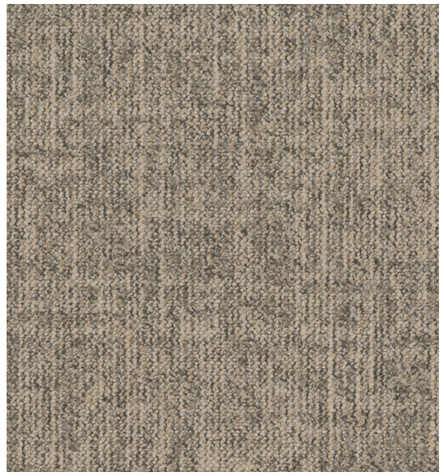

LINON AD60 2928-V
LRV: 27%
Ref. 712336010



LINON AD60 9098-V
LRV: 21%
Ref. 712336020



LINON AD60 9964
LRV: 9%
Ref. 712336025



LINON AD60 9951
LRV: 15%
Ref. 712336024



LINON AD60 9527-V
LRV: 22%
Ref. 712336023

KEY FEATURES

- Irregular woven design
- Contrast yarn combination

TECHNICAL SPECIFICATION

- Tufted Construction
- 75% Recycled Solution Dyed Nylon
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint: 1.71kg CO_2e/m^2

DESSO

Fields

CARPET TILES



DESSO Fields is a textured carpet tile that gives the distinct impression of a hand-woven textile. Its enlarged and irregular loops help create highly tactile flooring that will render any space warm and welcoming.

The timeless design of Fields makes it easy to apply in a variety of settings.

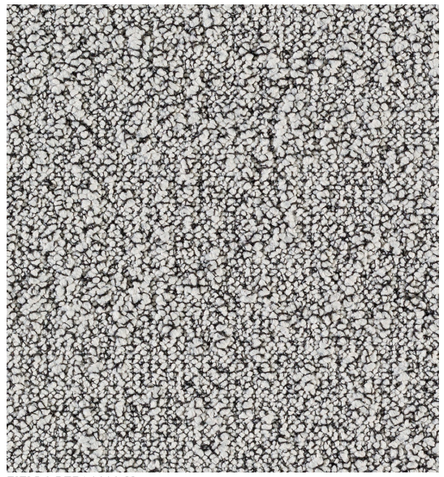

FIELDS B751 9098-V
LRV: 27%
Ref. 710495055

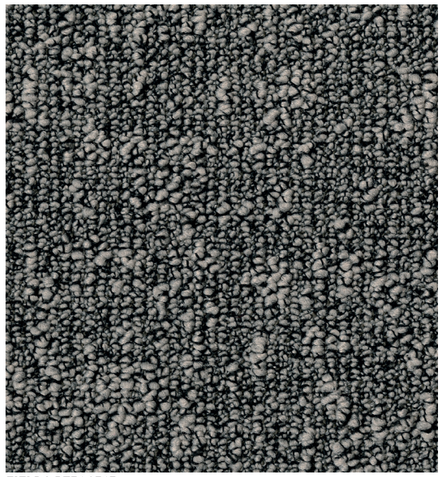

FIELDS B751 9515
LRV: 20%
Ref. 710495012

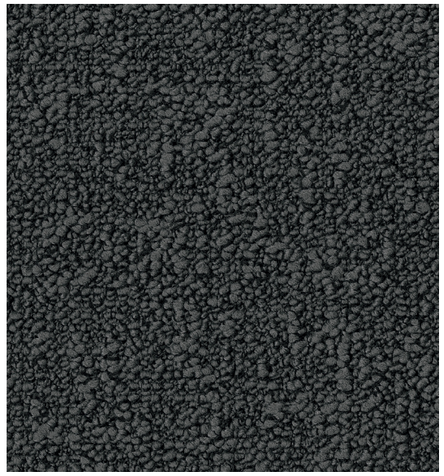

FIELDS B751 9980
LRV: 7%
Ref. 710495001

KEY FEATURES

- Irregular, textured design with dark contrast yarns
- An easy-to-apply, timeless design

TECHNICAL SPECIFICATION

- Tufted Construction
- 100% Recycled Solution Dyed Yarn
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint: 0.66kg CO_2e/m²



DESSO

Tactile Craft

CARPET TILES

The Tactile Craft collection consists of three harmonious and infinitely combinable designs. With gradient yarn densities, the three complementary designs flow seamlessly into one another, creating fluid transitions for multifunctional learning environments.



TACTILE 1 AD46 1660-V
LRV: 36%
Ref. 712296002



TACTILE 1 AD46 9097-V
LRV: 36%
Ref. 712296005



TACTILE 1 AD46 9935-V
LRV: 31%
Ref. 712296008



TACTILE 2 AD47 1660-V
LRV: 31%
Ref. 712305002

TACTILE 3 AD48 1660-V
LRV: 30%
Ref. 712314002

TACTILE 3 AD48 9097-V
LRV: 31%
Ref. 712314005



TACTILE 3 AD48 9935-V
LRV: 27%
Ref. 712314008

TACTILE 2 AD47 9097-V
LRV: 31%
Ref. 712305005

TACTILE 2 AD47 9935-V
LRV: 30%
Ref. 712305008

KEY FEATURES

- Create zones and define spaces using gradient yarn densities
- Neutral colour palette for warm, calming spaces
- Three designs for harmonious application

TECHNICAL SPECIFICATION

- Tufted Construction
- 100% Recycled Solution Dyed Nylon
- DESSO EcoBase® backing as standard
- Circular Carbon Footprint:
  1.00kg CO_2e/m² Tactile Craft 1 and 2
  0.90kg CO_2e/m² Tactile Craft 3





AirMaster Classic
AirMaster Sphere
AirMaster Earth

CARPET TILES

Designed to help improve indoor air quality in learning environments, DESSO AirMaster carpet tiles capture and retain fine dust 8 times more effectively than smooth floors, and 4 times more effectively than standard carpet[2], supporting student and staff wellbeing.



CLASSIC AD20 9032
LRV: 7%
Ref. 712211014



CLASSIC AD20 9030
LRV: 3%
Ref. 712211013



CLASSIC AD20 9096-V
LRV: 20%
Ref. 712211015



EARTH AD31 9094
LRV: 15%
Ref. 712244015



SPHERE AD21 9032
LRV: 7%
Ref. 712218014



SPHERE AD21 9096-V
LRV: 21%
Ref. 712218015



SPHERE AD21 9505-V
LRV: 21%
Ref. 712218017

KEY FEATURES

- Reduces the amount of harmful particles in the indoor air
- Low VOC emissions
- Ultra-low Circular Carbon Footprint

TECHNICAL SPECIFICATION

- Tufted Trilogy Yarn Construction
- 100% Recycled Solution Dyed Nylon
- DESSO EcoBase® backing as standard

SPHERE CLASSIC & EARTH

Contract Wood

HETEROGENEOUS VINYL

Drawing inspiration from the natural beauty of real wood, **Contract Wood** has been developed to meet the specific demands of very high traffic areas. A 0.70mm wear layer makes Contract Wood ideal for demanding spaces, including classrooms, libraries and multi-purpose halls.



AMBOISE CHOCOLATE
LRV: 16%
Ref. 25098116



AMBOISE SILVER
LRV: 39%
Ref. 25098094



FARO 2 ANTHRACITE
LRV: 13%
Ref. 25098172



FARO 2 NATURAL
LRV: 26%
Ref. 25098134



OAK GREY
LRV: 26%
Ref. 25098136



OAK MIDDLE NATURAL
LRV: 21%
Ref. 25098174



OAK NATURAL HONEY
LRV: 28%
Ref. 25098175



OAK NATURAL BEIGE
LRV: 32%
Ref. 25098176



OAK DARK BROWN
LRV: 15%
Ref. 25098177

KEY FEATURES

- 0.70mm wear layer
- Designed for high-traffic environments

TECHNICAL SPECIFICATION

- Glue Down Installation
- 12 Year Commercial Warranty





Safetred Wood Next Generation

HETEROGENEOUS VINYL

Safetred Wood with embedded aluminium oxide anti-slip particles provides a lifetime PTV ≥ 36 slip resistance. It features our TEKTANIUM® surface protection ensuring enhanced stain resistance and easier maintenance. The various wood species within the collection coordinate with our **Excellence** smooth vinyl, enabling seamless design continuity where both a safety and non-safety floor is required.



TRADITIONAL OAK LIGHT
LRV: 31%
Ref. 206074001



TRADITIONAL OAK GREY WHITE
LRV: 40%
Ref. 206074011



VARIANT OAK BROWN GREY
LRV: 14%
Ref. 206074712



CHATILLON OAK GREY
LRV: 23%
Ref. 206074713



TRADITIONAL OAK COOL GREY
LRV: 22%
Ref. 206074019



TRADITIONAL OAK ANTHRACITE
LRV: 15%
Ref. 206074711



VARIANT OAK WARM BROWN
LRV: 15%
Ref. 206074714

HERRINGBONE GREY WHITE
LRV: 38%
Ref. 206074719

VARIANT OAK NUT
LRV: 20%
Ref. 206074715

VARIANT OAK NATURAL
LRV: 28%
Ref. 206074716

CHATILLON OAK BEIGE
LRV: 30%
Ref. 206074718



HERRINGBONE LIGHT TAN
LRV: 24%
Ref. 206074720



CHATILLON OAK LIGHT BROWN
LRV: 39%
Ref. 206074717

KEY FEATURES

- TEKTANIUM® PU for improved durability and easier maintenance
- Colour co-ordinated with our Excellence smooth vinyls

TECHNICAL SPECIFICATION

- R10 Slip Resistance
- PTV ≥ 36
- Glue Down Installation
- 12 Year Commercial Warranty

Safetred Universal Next Generation

HETEROGENEOUS VINYL



Safeted Universal is a timeless non-directional safety floor with embedded silicone carbide anti-slip particles that provide a lifetime PTV ≥ 36 slip resistance. Featuring TEKTANIUM®, Tarkett's innovative surface protection, **Safetred Universal Next Generation** is a high-performance safety floor that is easier to clean, durable and has an ultra-matt finish.

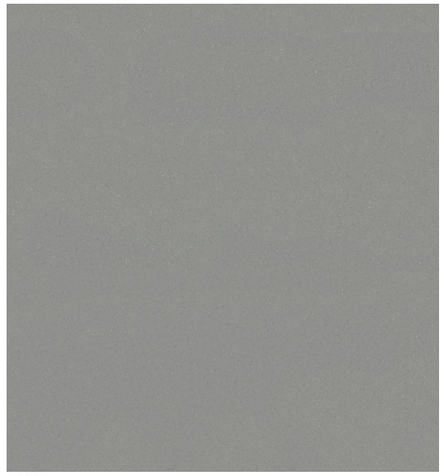

CERES
LRV: 30%
Ref. 206070700



CONSTELLATION
LRV: 24%
Ref. 206070190



JUNO
LRV: 40%
Ref. 206070705



PROTEUS
LRV: 12%
Ref. 206070710



EUROPA
LRV: 48%
Ref. 206070703



KEPLER
LRV: 21%
Ref. 206070708



QUASAR (R10, R11, R12)
LRV: 6%
Ref. 206070100



SATURN
LRV: 48%
Ref. 206070702



MARS
LRV: 18%
Ref. 206070704



MERCURY (R10, R11, R12)
LRV: 23%
Ref. 206070180



NEBULA (R10, R11, R12)
LRV: 15%
Ref. 206070270



VEGA
LRV: 15%
Ref. 206070706



NEPTUNE
LRV: 34%
Ref. 206070709



PLUTO
LRV: 31%
Ref. 206070701



SIRIUS
LRV: 38%
Ref. 206070707



VENUS (R10, R11, R12)
LRV: 46%
Ref. 206070110

KEY FEATURES

- Non-directional, easy-to-apply design
- Colour coordinated with our Safetred and Excellence collection of smooth vinyls
- Selected colours available in R11 and R12 format

TECHNICAL SPECIFICATION

- R10 Slip Resistance
- PTV ≥ 36
- Glue Down Installation
- 12 Year Commercial Warranty



Safetred Spectrum Next Generation

HETEROGENEOUS VINYL



Safeted Spectrum Next Generation is a timeless non-directional safety floor, offering a modern twist on a classic design, with embedded silicone carbide anti-slip particles that provide a lifetime PTV ≥ 36 slip resistance. Featuring TEKTANIUM®, Tarkett's innovative surface protection, **Safetred Spectrum Next Generation** is a high-performance safety floor that is easier to clean, durable and has an ultra-matt finish.



ONYX
LRV: 6%
Ref. 206073895



SHALE
LRV: 24%
Ref. 206073805



FOREST GREEN
LRV: 16%
Ref. 206073728



BATTLESHIP
LRV: 15%
Ref. 206073810



SILVER
LRV: 49%
Ref. 206073800



SAPPHIRE
LRV: 12%
Ref. 206073731



KHAKI
LRV: 27%
Ref. 206073727



CLAY
LRV: 30%
Ref. 206073724



TERRACOTTA
LRV: 19%
Ref. 206073725



ICE BLUE
LRV: 35%
Ref. 206073730



OCHRE
LRV: 42%
Ref. 206073726



TURQUOISE
LRV: 31%
Ref. 206073729

KEY FEATURES

- A modern reinterpretation of a classic design
- Non-directional design with a matt finish
- Co-ordinated colours with Safetred Universal

TECHNICAL SPECIFICATION

- R10 Slip Resistance
- PTV ≥ 36
- Glue Down Installation
- 12 Year Commercial Warranty

34 43 B_{fl}-s1 42% RECYCLED CONTENT RECYCLABLE OFFCUTS PHTHALATE FREE MADE IN EUROPE TEKTANIUM®

Safetred Serenity Next Generation

HETEROGENEOUS VINYL

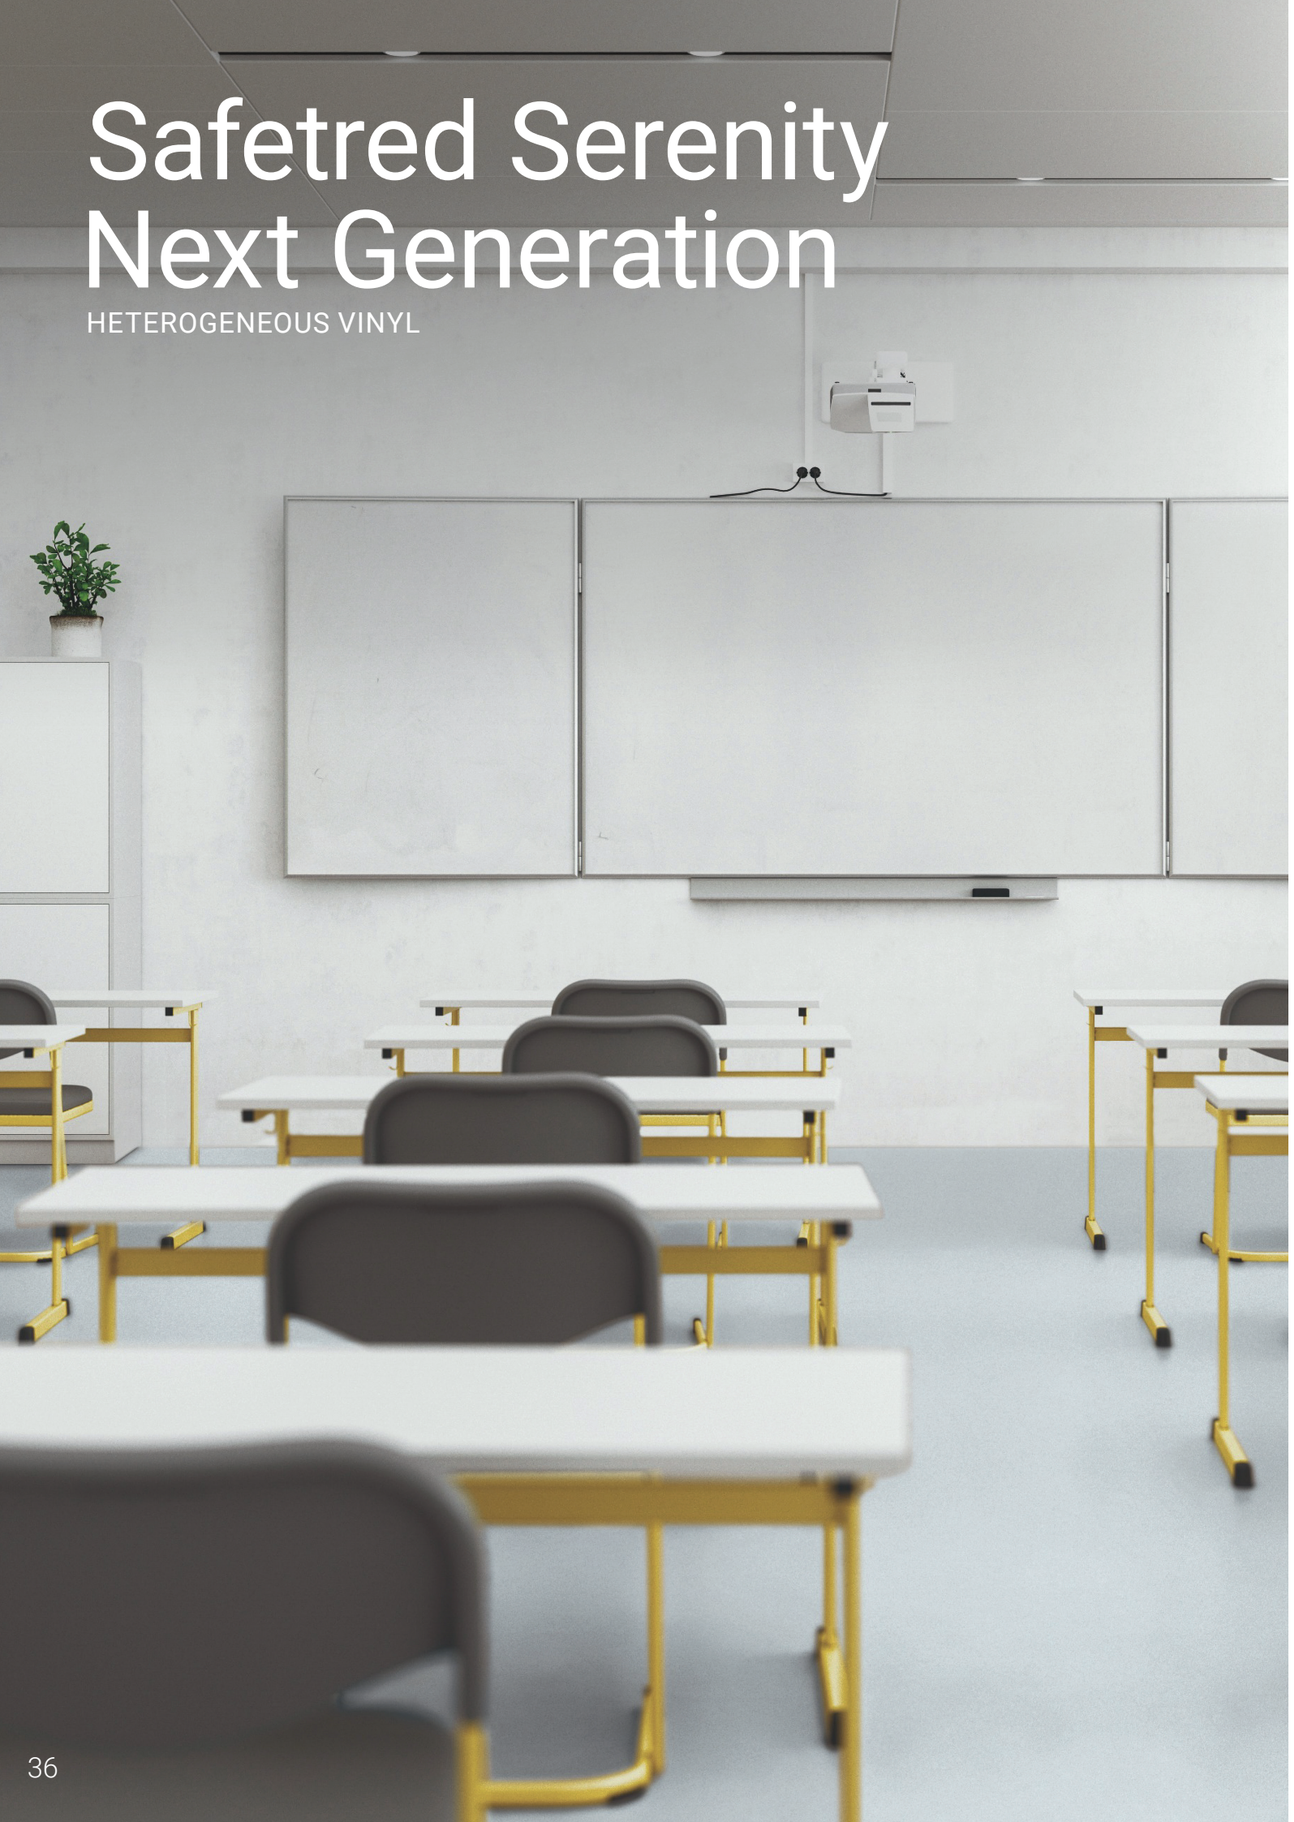

Inspired by nature, **Safetred Serenity** offers a new, inclusive, multifunctional, and eco-designed solution to the existing **Safetred** portfolio. Providing a myriad of design applications, this R11 safety floor looks beautiful in any environment. The collection is suitable for both barefoot and shod application and its calming serene palette, which is DSDC accredited, lends itself perfectly to neurodiverse settings.

STARRY NIGHT
LRV: 13%
Ref. 206077008

WOODLAND WALK
LRV: 22%
Ref. 206077012

BLUE LAGOON
LRV: 39%
Ref. 206077011

BABBLING BROOK
LRV: 44%
Ref. 206077010

OCEAN WAVE
LRV: 22%
Ref. 206077007

MISTY MOUNTAIN
LRV: 26%
Ref. 206077006

SNOWDRIFT
LRV: 48%
Ref. 206077009

WHITE CLIFF
LRV: 61%
Ref. 206077003

SANDY BEACH
LRV: 53%
Ref. 206077001

SKIMMING STONE
LRV: 15%
Ref. 206077005

DESERT ISLAND
LRV: 43%
Ref. 206077002

DRIFTWOOD
LRV: 27%
Ref. 206077004

KEY FEATURES

- Suitable for barefoot and shod applications
- Nature-inspired tones and calming colour palette
- DSDC accreditation for neurodiverse environments
- TEKTANIUM® surface treatment for easy maintenance

TECHNICAL SPECIFICATION

- R11 Slip Resistance
- PTV ≥ 50
- Glue Down Installation
- 12 Year Commercial Warranty

34 | 43 | Bfl-s1 | 37% RECYCLED CONTENT | RECYCLABLE OFFCUTS | PHTHALATE FREE | MADE IN EUROPE | TEKTANIUM®

Eclipse Premium

HOMOGENEOUS VINYL



The **Premium Range** combines functionality, design and environmental performance. Apart from Tarkett's iQ range, it boasts the market's largest homogeneous vinyl offering in non-directional patterns.

Eclipse Premium offers two designs, Classic and Spirit. Classic combines light and dark shades to create high-contrast impact, while Spirit provides a subtler low-contrast design in a palette of warm and cold neutrals and fresh hues.

CLASSIC DARK COOL GREY 012
LRV: 15%
Ref. 21020012

CLASSIC MEDIUM COOL GREY 035
LRV: 34%
Ref. 21020035

SPIRIT CLAY GREY 988
LRV: 31%
Ref. 21020988

SPIRIT LIGHT GREY 701
LRV: 57%
Ref. 21020701

SPIRIT LIGHT GREEN 975
LRV: 53%
Ref. 21020975

SPIRIT LIGHT BLUE 978
LRV: 43%
Ref. 21020978

SPIRIT YELLOW 732
LRV: 60%
Ref. 21020732

KEY FEATURES

- Premium Pro surface treatment increases durability, resistance to heavy traffic and ease of cleaning
- Highly flexible solution for perfect coving results

TECHNICAL SPECIFICATION

- Homogeneous Construction
- Glue Down Installation
- 12 Year Commercial Warranty

34 | 43 | B_{fl}-s1 | RECYCLABLE OFFCUTS & POST-USE | 25% RECYCLED CONTENT | PHTHALATE FREE | MADE IN EUROPE



Primo Premium

HOMOGENEOUS VINYL

The **Premium Range** combines functionality, design and environmental performance. Apart from Tarkett's iQ range, it boasts the market's largest homogeneous vinyl offering in non-directional patterns.

Primo Premium, in its spectrum of easy-to-combine shades, uses neutral-coloured accents, ideal for high traffic areas.

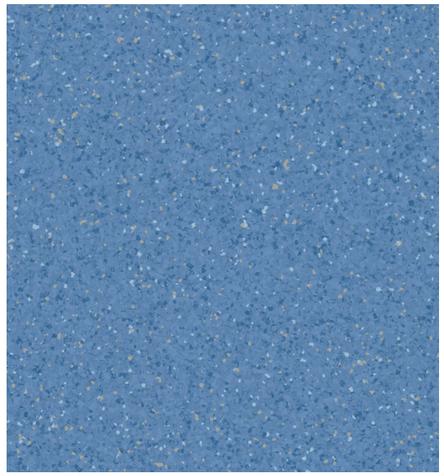

MEDIUM BLUE
LRV: 27%
Ref. 21010665



LIGHT WARM GREY
LRV: 56%
Ref. 21010672



MEDIUM COOL GREY
LRV: 29%
Ref. 21010673



MEDIUM COOL BEIGE
LRV: 54%
Ref. 21010657

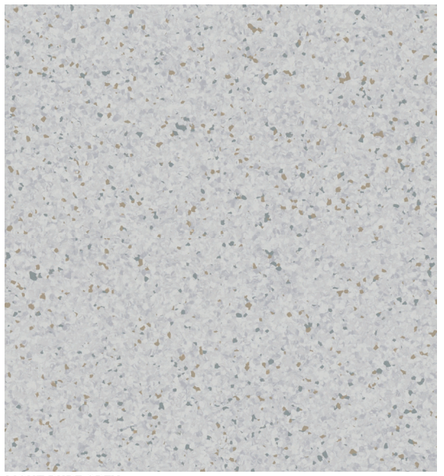

LIGHT PURE GREY
LRV: 72%
Ref. 21010651

KEY FEATURES

- Premium Pro surface treatment increases durability, resistance to heavy traffic and ease of cleaning
- Highly flexible solution for perfect coving results

TECHNICAL SPECIFICATION

- Homogeneous Construction
- Glue Down Installation
- 12 Year Commercial Warranty



Primo Safe.T

HOMOGENEOUS VINYL



Primo Safe.T, a homogenous safety vinyl suitable for both wet and dry areas, providing a lifetime PTV of +36. It forms part of the Premium range, a multifunctional collection offering 8 core colourways in a variety of functionalities - acoustic, compact, static dissipative and enhanced safety solution.

Paired with a multi-coloured weld rod, Primo Safe.T provides a safe, durable and cohesive floor finish which will meet the most demanding of areas.



DARK COOL GREY 795
LRV: 15%
Ref. 21013795



MEDIUM COOL GREY 794
LRV: 34%
Ref. 21013794



MEDIUM PURE GREY 791
LRV: 56%
Ref. 21013791



LIGHT PURE GREY 790
LRV: 72%
Ref. 21013790



MEDIUM WARM BEIGE 800
LRV: 55%
Ref. 21013800



SAND 644
LRV: 50%
Ref. 21013644

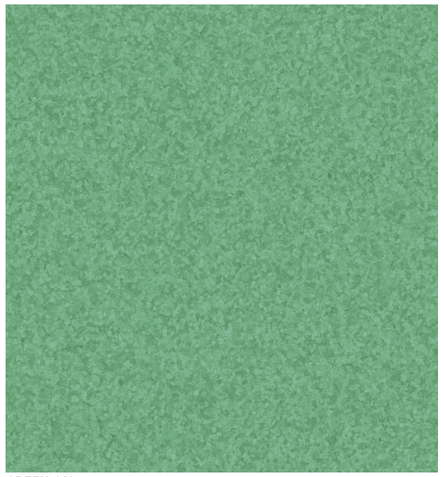

GREEN 643
LRV: 33%
Ref. 21013643

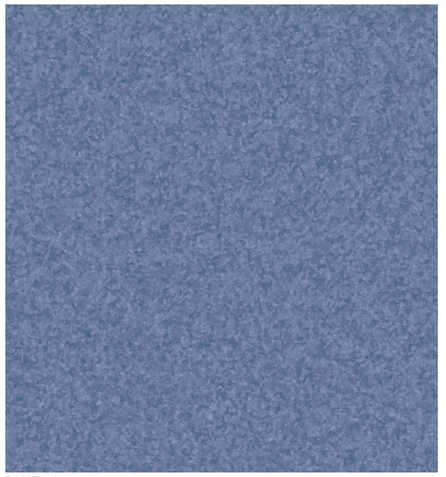

BLUE 642
LRV: 27%
Ref. 21013642

KEY FEATURES

- Suitable for barefoot and shod applications
- Safe.T Clean XP™ treatment for easier maintenance and wear resistance

TECHNICAL SPECIFICATION

- R10 Slip Resistance
- PTV ≥ 36
- Homogeneous Construction
- 12 Year Commercial Warranty









RECYCLABLE **OFFCUTS & POST-USE**



25.5% RECYCLED **CONTENT**



PHTHALATE **FREE**



Essence 55

LUXURY VINYL TILES

Essence 55 is our high-performing entry-level LVT solution. Built to withstand heavy use, this collection carries a 33 Heavy Commercial classification and offers easy maintenance with an ultra-matt realistic finish, making it an ideal choice for busy learning environments with high footfall.



COOL OAK CLASSICAL
LRV: 36%
Ref. 260053001



COOL OAK LIGHT BEIGE
LRV: 42%
Ref. 260053002



PRIMARY OAK BEIGE
LRV: 39%
Ref. 260053003



PRIMARY OAK LIGHT BROWN
LRV: 31%
Ref. 260053005



COOL OAK CLASSICAL - HERRINGBONE
LRV: 36% Ref. 260060001



PRIMARY OAK LIGHT GREY
LRV: 27%
Ref. 260053006



PRIMARY OAK LIGHT BROWN - HERRINGBONE
LRV: 31% Ref. 260060005



PRIMARY OAK LIGHT GREY - HERRINGBONE
LRV: 27%
Ref. 260060006



PRIMARY OAK NATURAL
LRV: 22%
Ref. 260053004



TRIBE OAK LIGHT NATURAL
LRV: 38%
Ref. 260053007



TRIBE OAK GREY
LRV: 27%
Ref. 260053008



PRIMARY OAK NATURAL - HERRINGBONE
LRV: 22% Ref. 260060004



TRIBE OAK MOCHA
LRV: 13%
Ref. 260053009



SCRATCHED CEMENT GREY
LRV: 32%
Ref. 260054010

KEY FEATURES

- Durable & Resistant Ultra-Matt PU
- Herringbone Designs Available

TECHNICAL SPECIFICATION

- Wear Layer: 0.55mm
- Bevels: 4 sides
- Glue Down Installation
- Up to 55% Recycled Content

33

B_{fl}-s1

55% RECYCLED CONTENT

PHTHALATE FREE

MADE IN EUROPE

TEKTANIUM®

Classics 55

LUXURY VINYL TILES

Classics 55 is our high-performance glue-down LVT range that blends timeless wood and stone aesthetics with modern durability. Its ultra-matt finish and realistic gravure printing create a natural, authentic look, while the advanced TEKTANIUM® PU surface delivers exceptional stain and scuff resistance. This range offers long-lasting performance, easy maintenance, and flexible modular installation making it a stylish, practical flooring solution.



ENGLISH OAK BROWN
LRV: 18%
Ref. 24513009



ENGLISH OAK CLASSICAL – PARQUET
LRV: 26% Ref. 24520008



CONTEMPORARY OAK GREGE
LRV: 30%
Ref. 24513020



ENGLISH OAK CLASSICAL
LRV: 26%
Ref. 24513008



ENGLISH OAK BROWN – PARQUET
LRV: 18%
Ref. 24520009



ENGLISH OAK GREGE
LRV: 33%
Ref. 24513012



CONTEMPORARY OAK GREY
LRV: 29%
Ref. 24513021



ENGLISH OAK GREGE – PARQUET
LRV: 33%
Ref. 24520312

KEY FEATURES

- TEKTANIUM® PU coating delivers ultra-matt finish and unequalled resistance
- Easy to clean and maintain
- Ideal for high-footfall areas

TECHNICAL SPECIFICATION

- Wear Layer: 0.55mm
- Bevels: 4 sides
- Glue Down Installation

33 | 42 | B_{fl}-s1 | 39.5% RECYCLED CONTENT | PHTHALATE FREE | MADE IN EUROPE | TEKTANIUM®

Embond 170

ADHESIVE



A high quality, pressure sensitive, solvent free, tackified acrylic emulsion adhesive. Use wet on dry, smooth and absorbent subfloors, or dry on non-absorbent subfloors. May be roller applied to minimise adhesive grin through and indentations. Suitable for use over normal underfloor heating installations, or where solar or other direct heat occurs. Suitable for installing unbacked vinyl sheet and tile floorcoverings, including safety flooring and foam backed acoustic vinyl floorcoverings. Also suitable for polyolefin floorcoverings, semi flexible tiles, domestic cushioned vinyl, vinyl or foam backed carpets and entrance matting.

KEY FEATURES

- Solvent free, tackified acrylic emulsion adhesive 15L
- Wet bond or dry pressure sensitive use
- Fine notched trowel or roller application
- Long working time of 2 hours
- Permanent high tack
- High coverage
- High final bond strength
- No offensive odour

REF.

1203004





Tarkomat

INDOOR INTEGRATED DOOR MAT 9MM/17MM

Available in two thickness options, Tarkomat is an entrance mat system composed of aluminium profiles and textile, rubber or brush inserts. The profiles are inserted into one another by the unique click assembly system, without linking wires or connectors that could weaken the structure. Tarkomat comes as standard with Polypropylene inserts, with rubber and nylon available for outdoor/semi-outdoor use.

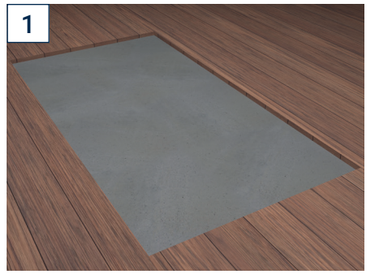

Place the self-adhesive black foam strips next to each other in parallel, with the adhesive part facing upwards. Peel off the protective paper a few centimetres.

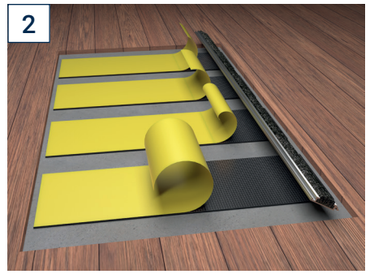

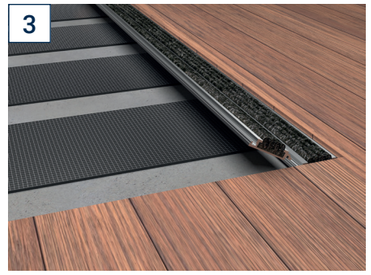

Click each new profile into the previous, making sure they adhere to the black foam underneath.

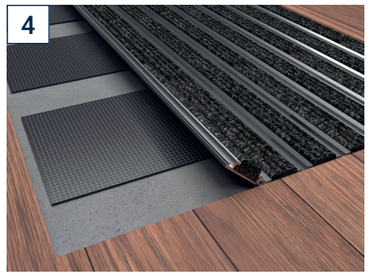

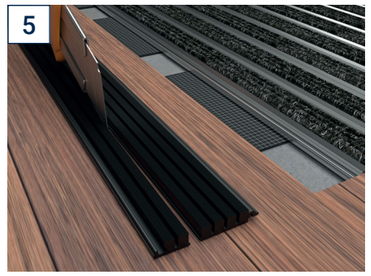

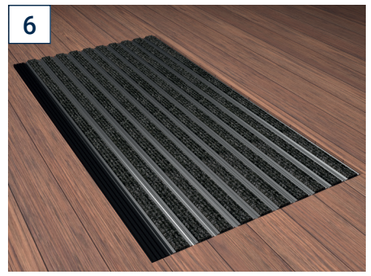

Continue the process until the last profile has been fitted. Cut the rubber band at the remaining width.

Insert the rubber band.

KEY FEATURES

- All-in-one kit for indoor uses
- Polypropylene textile ensuring dust and dirt capture
- Effective moisture wicking
- Meets Access to and Use of Buildings Regulations
- Includes 14 strips, an adhesive underlay, and a rubber profile covering an area of 0.55m²

REF.

9mm: 206060001
17mm: 206060002

DIMENSIONS

Thickness [mm]: 9 / 17
Width [mm]: 33
Length [mm]: 1200
Pieces per box: 14 strips
Dimensions [cm]: 124 × 16 × 7 / 124 × 22.7 × 7

Our Approach to Circularity Focuses on Three Key Areas

1

DESIGN

Rooted in Cradle-to-Cradle principles, we design every floor with its next life in mind from the outset for end-of-use recovery.

2

MATERIALS

Working with industry partners, we limit the use of virgin ingredients, actively recovering valuable materials otherwise destined for waste.

3

CIRCULAR JOURNEY

We recognise that we are responsible for the full life cycle of every material we work with, so through ReStart®, we reclaim and recycle materials for the next generation of flooring.

Why Recycle

TAKE FULL ADVANTAGE OF OUR RESTART® PROGRAMME



1. REDUCE YOUR IMPACT

Recycling waste emits less carbon than extracting and transforming virgin materials. It is a virtuous alternative to landfill and incineration. To keep track of the carbon generated and saved over a product's life cycle, we calculate the Circular Carbon Footprint of every one of our collections.



2. PRESERVE NATURAL RESOURCES

Recycling waste into valuable new materials places less of a burden on the world's natural resources.

Potential contribution to **GREEN BUILDING CERTIFICATIONS**

3. REACH HIGHER STANDARDS OF SUSTAINABILITY

Our high levels of recycled content, along with our take-back and recycling initiatives through ReStart®, can help you achieve higher standards of sustainability and reach green building labels like LEED, WELL and BREEAM.



GOT A PROJECT IN MIND? LET US HELP YOU.

How It Works



1. CONTACT

Contact the Tarkett Customer Services team to initiate a collection.



2. RECEIVE

We'll send you your ReStart® container to collect post-installation offcuts or old flooring.



3. FILL

Fill up your ReStart® bags with resilient material or stack your old carpet tiles on pallets.



4. BOOK

Book a collection time slot with Tarkett's Customer Services team to send your waste material to be recycled.



5. CERTIFICATION

Once your materials have been collected, Tarkett will certify the waste collection and report how many kilos of CO_2 you have saved.

(1) Terms & Conditions. Tarkett Ltd. reserves the right to add or remove products to/from the 'Flooring for Education' collection at any time. Orders placed directly with Tarkett Ltd are subject to our standard terms of business. 'On the road in 24 hours' means that orders received in writing & entered on our system before 2:00pm (10am for DESSO Essence Next Day Delivery) are normally dispatched from Tarkett the next normal business day. UK Mainland only. Product availability & delivery is based on best efforts and Tarkett accepts no liability arising therefrom. Delivery would usually be 3-5 days from dispatch. DESSO Essence Next Day Delivery available to selected postcodes, further details are available on request. E&OE.

(2) Based on GUI test report AirMaster® 090225-01 DF with DESSO AirMaster® versus a standard smooth floor and versus standard structured loop pile carpet (median values).