

Collection 2018

VINYL

Modern
option for
modern
lifestyles

Collection 2018

| Page | Content |
|-------|--|
| 1 | About Tarkett |
| 2 | Modern option for modern lifestyles |
| 3 | Tarkett vinyl, the perfect choice |
| 4-5 | A new dimension for tomorrow's concept of sustainability |
| 6-7 | Technical data |
| 8-11 | Extra |
| 12-15 | Spark |
| 16-19 | Absolut |
| 20-27 | Force |
| 28-33 | Premium |
| 34-37 | Super S |
| 38-43 | Evolution |
| 44-47 | Optima |
| 48-49 | Installation instructions |



Tarkett values:

Positive customer attitude

Team spirit

Empowerment and accountability

Respect and integrity

Commitment to the environment

History

With more than 130 years of history, Tarkett is a worldwide leader in providing innovative and sustainable flooring and sports surface solutions.

Flooring covers the world. In every space built by men and women, around the planet, wherever we live, **flooring provides inspiration, comfort and safety, protecting health and well-being, and helping people lead better, happier lives.**

A world leader in integrated flooring and sports surface solutions, Tarkett has been providing unique flooring experiences in homes, schools, workplaces, hospitals, retail stores, hotels, and wherever sports are played.

References

We work with many of the world's leading architects and building professionals to provide a genuine service. As a result, Tarkett's integrated flooring and sports surfaces solutions are part of numerous prestigious architectural references. Together we help people to enjoy a better quality of life every day. We provide integrated flooring and sports surface solutions for architects, facility professionals, contractors, distributors, installers and end-users.

Worldwide

Tarkett is the most global player in the sector with 34 industrial sites and almost 12.500 employees serving clients in more than 100 countries. Every day, we sell around 1.3 million m² of flooring for Healthcare, Education, Housing, Retail & Hospitality, Offices and Sports.


Modern option for modern lifestyles

Tough, practical and **hygienic**, modern vinyl also offers an extraordinary choice of designs: from brilliant colours and abstracts, to perfect reproductions of natural materials such as wood and stone.

Underfoot comfort together with a variety of finishes provide touch sensation that matches the looks. Hardwearing, waterproof and easy to clean, vinyl is the modern option for modern lifestyles.

Vinyl collection 2018 offers the right solution for every room in the house. No project is the same, and people's needs and tastes differ. That's why Tarkett offers a range of flooring solutions adapted for each room and lifestyle.

Think about these criteria when choosing your flooring:

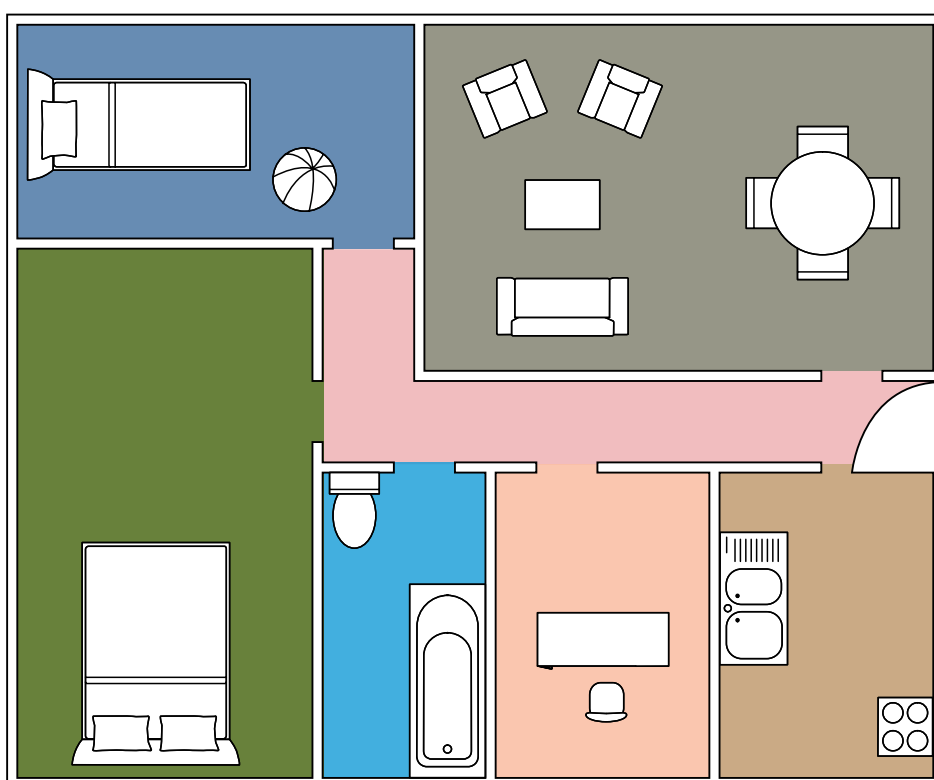

- Style and function
- Resistant to marks & scratch
- Comfort & conviviality



- Hygiene and safety
- Resistance to spills & stains
- Water & slip resistance
- Comfort and coziness
- Style and design



- Comfort
- Thermal insulation
- Coziness
- Kid-proof

Our floors are:

Functional – meeting functional needs like durability and resistance

Sensorial – enhancing well-being through comfort and inspiring colors and designs

Ecological – contributing to better indoor air quality and reducing use of water and detergents for cleaning.

With the industry's largest range of vinyl decors, Tarkett offers endless design possibilities, from the most classic to the most contemporary.

Tarkett vinyl is an ideal solution for those who are passionate about their homes and renovate it regularly to enhance their interiors.

Tarkett vinyl the perfect choice

Modern and affordable, vinyl floor covering is also comfortable and offers endless design possibilities for all tastes. It comes in rolls, and it is suitable for every room in the house. Last but not least, it is respectful of the environment.

Endless design possibilities

From wood and stone imitations inspired by nature, to flashy colorful designs for energetic interiors, Tarkett vinyl offers all options!

Easy to live with


It goes without saying that vinyl is also an easy-to-live-with flooring. Its good resistance to stains, marks and moisture, makes it an ideal choice for easy maintenance. Save time on cleaning to spend it with your family!

Easy to Install & to change

Vinyl is all about making things easier. Whether in new houses or renovations, it is really easy to install.

Comfortable flooring

Vinyl is a comfortable flooring solution. Thanks to its thermal resistance, it brings underfoot comfort. It also offers acoustic comfort, through its good sound absorption. Safe and hygienic, Tarkett vinyl comes with ranges offering anti-slip properties.

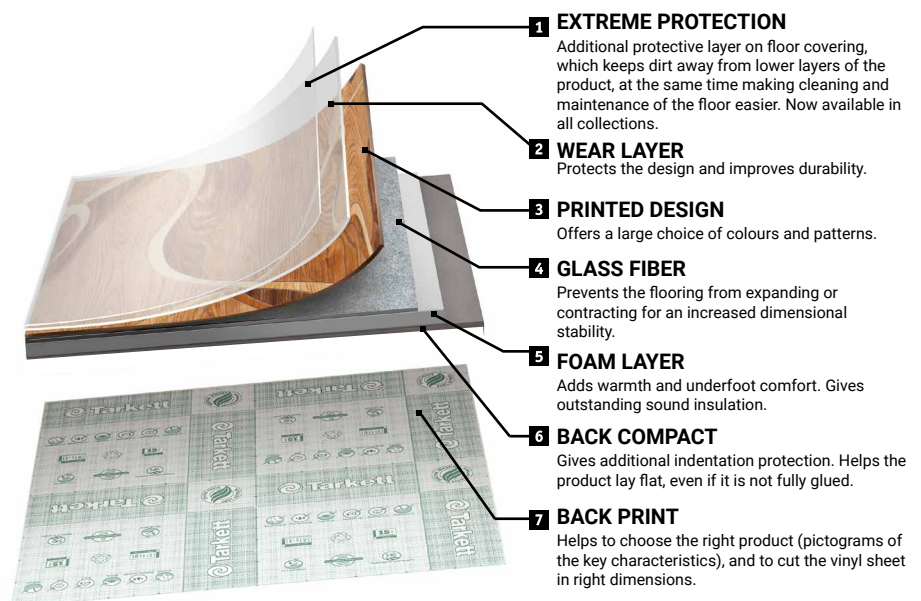


A new dimension for tomorrow's concept of sustainability

With major society challenges mounting quickly in the years to come, today's concept of sustainability will have to evolve to create new opportunities for companies and organizations to make proactive and meaningful contributions.

While our sustainability model remains founded on the three traditional pillars of People, Planet, Profit, we have imagined a fourth dimension: Purpose.

We believe that tomorrow's model of sustainability should serve a distinctive purpose, allowing us to make tangible contributions to those society challenges which might benefit from our 130 years of experience and know how in the fields of **flooring and sports surface solutions**.

Since 2013 we are committed to our 2020 Vision which guides us to do just that: accessing our flooring and sports surfaces for their potential and innovating to speed up their transformation process progressively allowing them to enter the age of the circular economy. Working in close collaboration with EPEA (Environmental Protection Encouragement Agency) Tarkett today is moving ahead in its ambition to become a leading circular economy company.

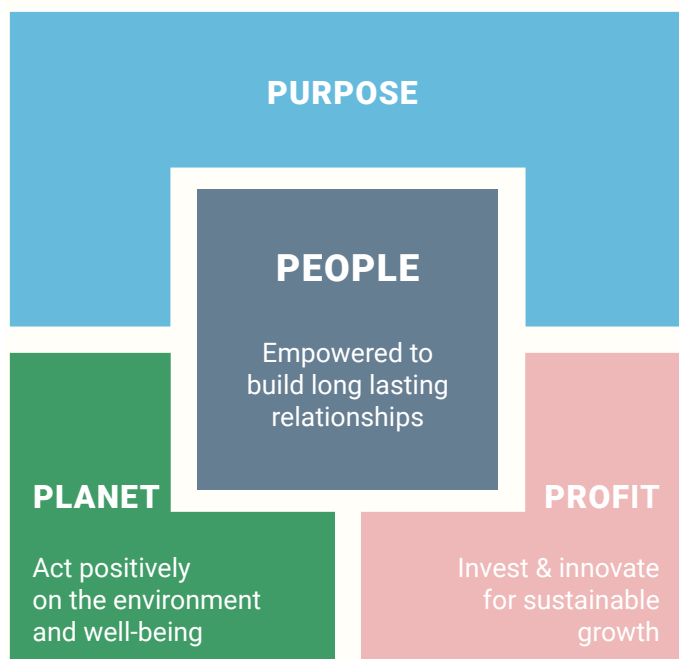

Solution for better health, well being and quality of life


As part of our sustainable commitment, Tarkett initiated assessment of vinyl floor components, with the support of the German Scientific Institute EPEA, and selected the best available technologies in the market, combining health, environment and performance.

Phthalates are a class of chemicals mostly used in plastics to provide flexibility, transparency and durability, and they have been the subject of scientific debate about their potential impact on human health. Scientific consensus on this topic still hasn't been reached, but successful alternatives exist.



After significant investments in research, we developed new formulations and processes, in order to manufacture flooring with non-phthalate plasticizers technology. **We selected phthalate-free plasticizers approved for food contact containers, which can also be used for toys intended to be placed in the mouth by children.**

In 2018, we are switching to completely phthalate-free offer of vinyl floor coverings, with the goal to provide our customers with the very best products. This way, we will offer our clients more comfortable, healthy and people-friendly indoor spaces, keeping high performance and design experience.

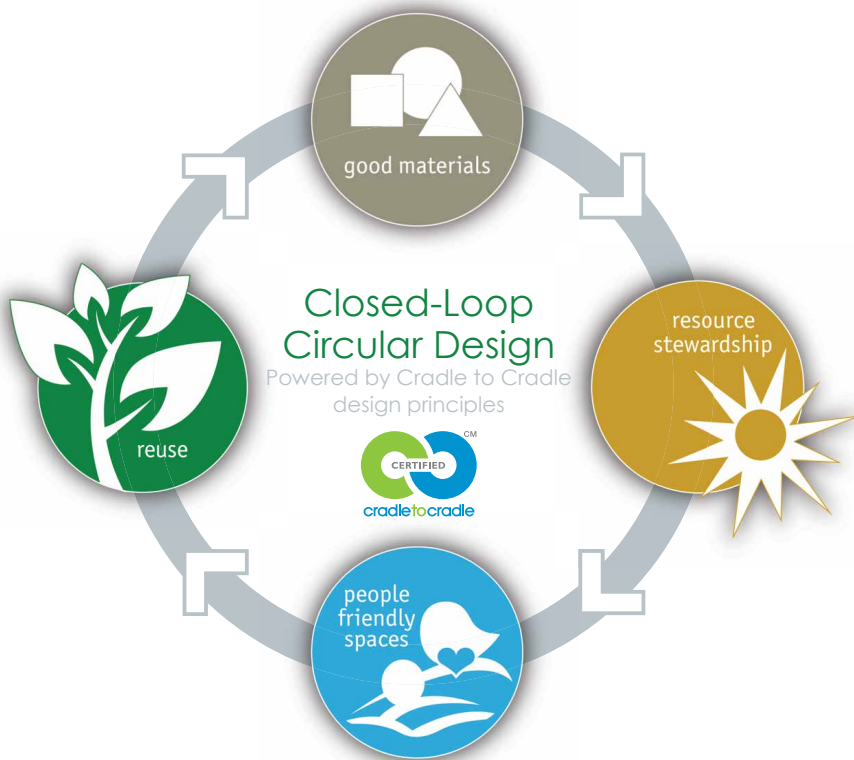

Tarkett is committed to health and the environment

Tarkett's contribution to an improved indoor environment and air quality is part of a larger commitment to building a sustainable future. Our sustainable product design approach focuses on the four steps of the product life-cycle.


Vitality Leaf

Eight Tarkett collections have Vitality leaf certificate. Vitality leaf is an international non obligatory ecological certification, that evaluates whole production life cycle: from purchasing raw materials to waste management. The certificate is issued by Ecounion (Экологический союз), based in St Petersburg, Russia.



Clean and Hygienic

Vinyl is a practical and hygienic flooring. We've extended the use of our PUR surface treatment to all our ranges making them highly resistant and very easy to maintain with simple vacuuming/mopping and minimal use of water and cleaning products.

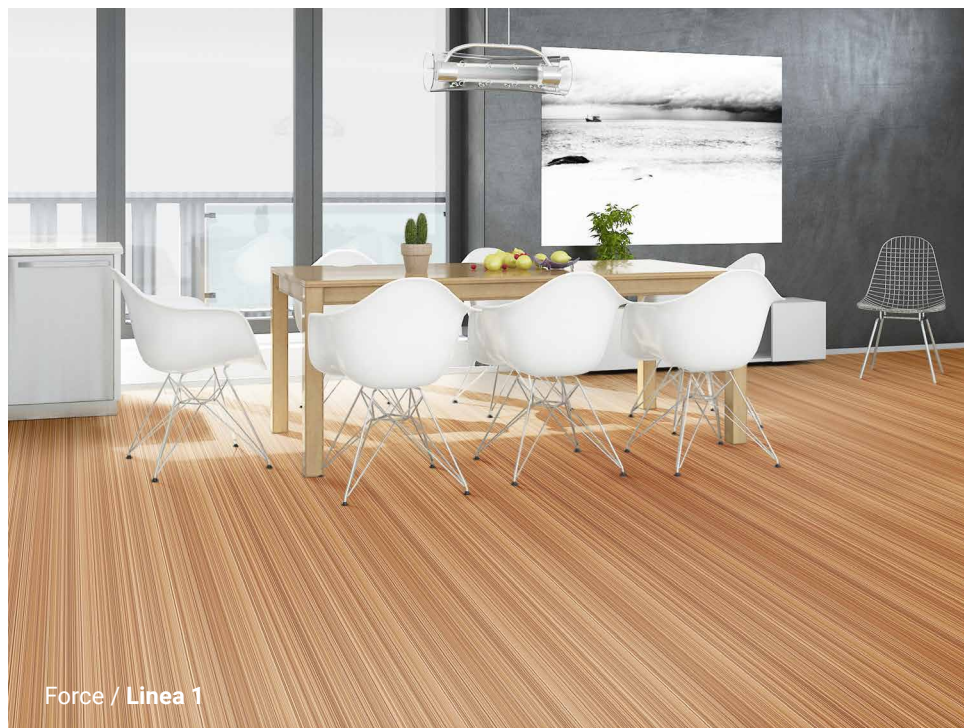


Technical data

| Technical data | Standards | Extra | Spark | Legend | Absolut |
|---------------------------|---|--|------------------------------|---|---|
| Classification | ISO 10874 (EN 685) domestic commercial | 23 34 | 34 43 | 32 23 | 23 31 |
| UPEC Classification | Impact sound reduction ISO 717/2 | 18 dB | 14 dB | 17 dB | 16 dB |
| Characteristics | | | | | |
| Total thickness | ISO 24346 (EN 428) | 3,30 mm | 2,00 mm | 3,50 mm | 3,00 mm |
| Wear layer thickness | ISO 24340 (EN 429) | 0,70 mm | 0,70 mm | 0,50 mm | 0,45 mm |
| Total weight | ISO 23997 (EN 430) | 3,00 kg/m ² | 2,22 kg/m ² | 2,47 kg/m ² | 2,45 kg/m ² |
| PUR Reinforcement | - | Extreme protection | | | |
| Wear layer binder content | ISO 11638 | Type 1 | Type 1 | Type 1 | Type 1 |
| Technical performances | | | | | |
| Residual indentation | ISO 24343-1 (EN 433) | ≤ 0,20 mm | ≤ 0,10 mm | < 0,35 mm | ≤ 0,35 mm |
| Reaction to fire | EN 13501-1 | Bfl s1 | Bfl s1 | Cfl s1 | Cfl s1 |
| Dimensional stability | ISO 23999 (EN 434) | ≤ 0,1 % | ≤ 0,1 % | < 0,1 % | ≤ 0,1 % |
| Furniture leg | EN 424 | Excellent | Excellent | Excellent | Excellent |
| Castor wheel test | ISO 4918 (EN 425) | Excellent | Excellent | Excellent | Excellent |
| Curl resultant to heat | ISO 23999 (EN 434) | ≤ 3,0 mm | ≤ 3,0 mm | ≤ 3,0 mm | ≤ 1,0 mm |
| Electrical resistance | EN 1081 | 2,9*10 ⁸ Ohm | 1,6*10 ⁸ Ohm | 9*10 ⁹ Ohm | 1*10 ⁸ Ohm |
| Hygiene | | Does not contribute to infection spreading | | | |
| Thermal resistance | DIN 52612 | 0,02-0,03 m ² K/W | 0,01-0,02 m ² K/W | 0,03 m ² K/W | 0,03-0,04 m ² K/W |
| Underfloor heating | EN 12524 | suitable | | | |
| Light fastness | ISO 105 B02- Method 3 | 7/8 | 7/8 | 7/8 | 7/8 |
| Form of delivery | EN 426 | 3m x 22lm (15-22 lm) | 2m x 25lm (15-25 lm) | 2,5/3/3,5m x 25 lm (15 - 25lm) 4m x 22 lm (15-22 lm) | 2,5/3m x 30 lm (15-30 lm) 3,5m x 25lm (15-25 lm) 4m x 22lm (15 - 22 lm) |
| Colors | | 8 | 13 | 6 | 24 |

EXTRA
SPARK
FORCE
LEGEND
ABSOLUT
PREMIUM
SUPER S
EVOLUTION
OPTIMA



| Force | Premium | Super S | Evolution | Optima |
|---|---|-----------------------------------|--------------------------------|---|
| 23 33 | 23 31 | 23 | 22 | 22 |
| 10 dB | 16 dB | 19 dB | 18 dB | 8 dB |
| | | | | |
| 2,50 mm | 3,20 mm | 3,00 mm | 2,70 mm | 1,40 mm |
| 0,60 mm | 0,30 mm | 0,25 mm | 0,20 mm | 0,20 mm |
| 2,50 kg/m² | 2,30 kg/m² | 1,90 kg/m² | 1,75 kg/m² | 1,40 kg/m² |
| Extreme protection | | | | |
| Type 1 | Type 1 | Type 1 | Type 1 | Type 1 |
| | | | | |
| ≤ 0,20 mm | ≤ 0,35 mm | ≤ 0,35 mm | ≤ 0,35 mm | ≤ 0,35 mm |
| Bfl s1 | Cfl s1 | Bfl s1 | Cfl s1 | Bfl s1 |
| ≤ 0,1% | ≤ 0,1% | ≤ 0,1 % | ≤ 0,1 % | ≤ 0,1 % |
| Excellent | Excellent | Very good | Very good | Very good |
| Excellent | Excellent | Very good | Very good | Very good |
| ≤ 3,0 mm | ≤ 3,0 mm | ≤ 3,0 mm | ≤ 3,0 mm | ≤ 3,0 mm |
| 1,9*10 ¹⁰ Ohm | NPD | NPD | NPD | NPD |
| Does not contribute to infection spreading | | | | |
| 0,03-0,04 mK/W | 0,03 mK/W | 0,03-0,04 m²K/W | 0,03-0,04 m²K/W | 0,18-0,02 m²K/W |
| suitable | | | | |
| 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| 2,5/3 m x 30lm (15 - 30 lm) 3,5 m x 25lm (15 - 25 lm) 4 m x 22lm (15 - 22 lm) | 2,5/3/3,5 m x 28lm (15 - 28 lm) 4m x 25lm (15 - 25 lm) | 2,5/3/3,5/4 m x 30lm (15 - 30 lm) | 2,5/3/3,5/4m x 33lm (15-33 lm) | 2,5/3/3,5m x 45lm (15 - 45 lm) 4 m x 40lm (15 - 40 lm) |
| 29 | 21 | 4 | 15 | 4 |

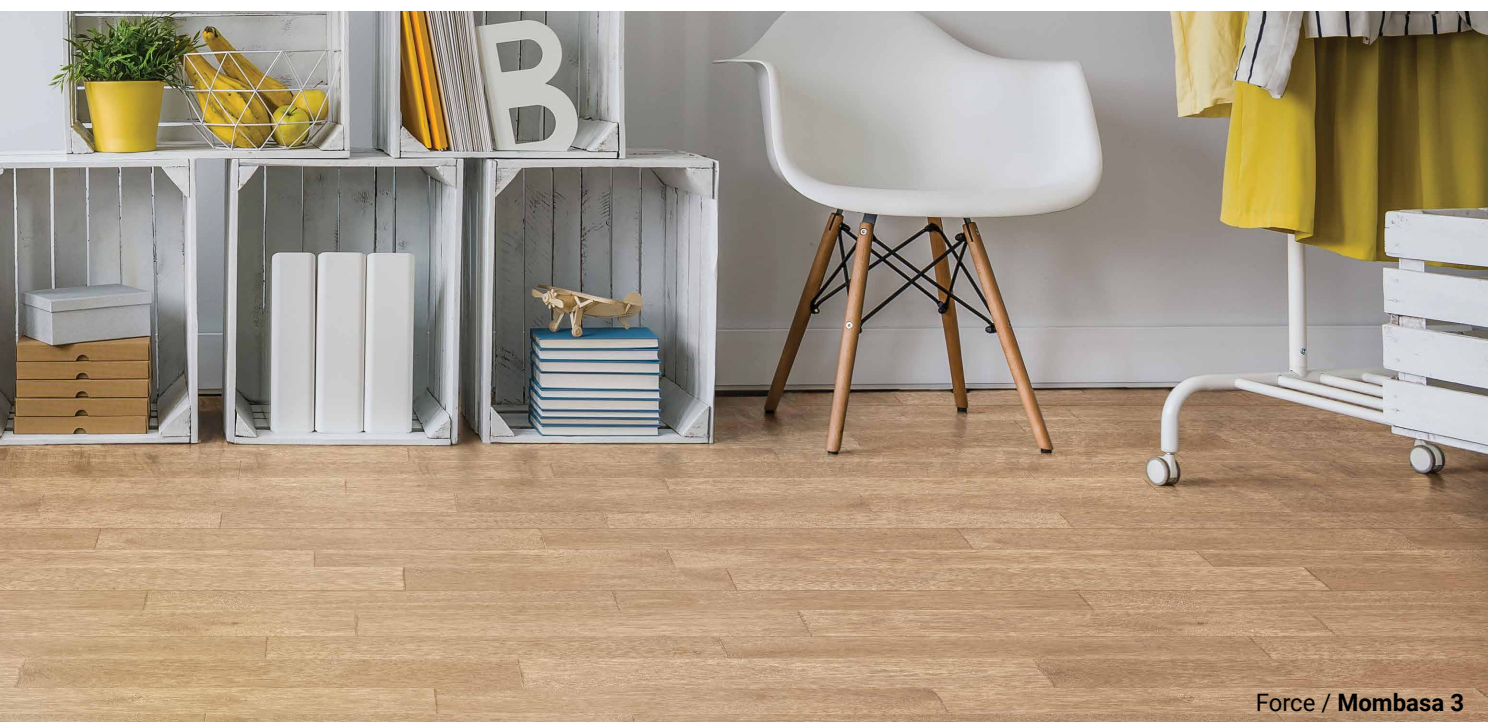


Force / Mombasa 3

Extra collection

Extra collection is the first acoustic flooring designed for high-frequency commercial areas (class 34).

Design concept delivers professional, practical and creative solutions that bring a positive and productive environment during a working day. Due to its excellent acoustic properties, the Extra vinyl collection will banish noise from the space. Tarkett recommends this collection for offices, as well as residential areas.

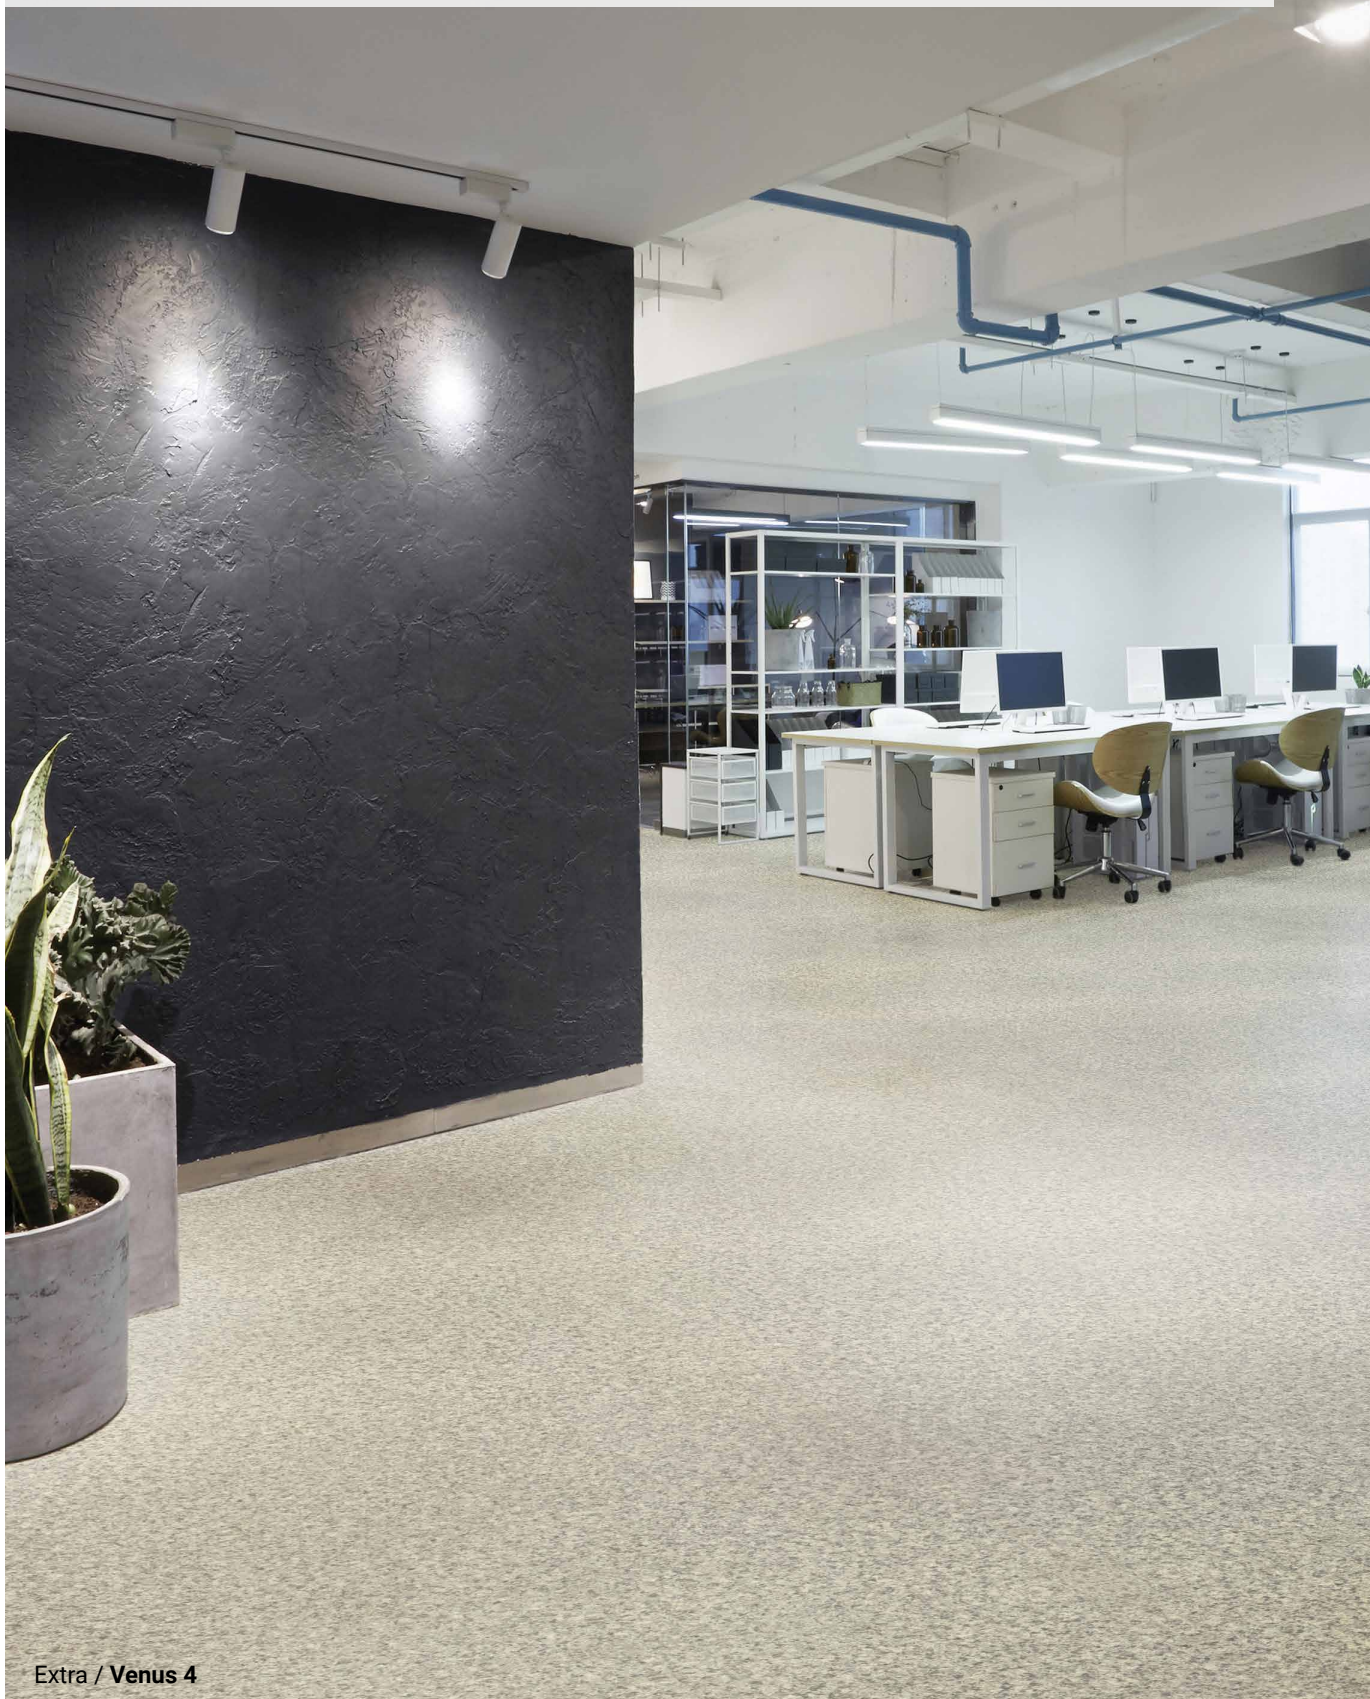

Extra / Venus 4



| Design name | Suggested WR |
|-------------|--------------|
| Akron 6 | 1291839 |
| Akron 7 | 1287434 |
| Akron 8 | 1287345 |
| Venus 1 | 1289803 |
| Venus 2 | 1287285 |
| Venus 3 | 1287176 |
| Venus 4 | 1287532 |
| Venus 5 | 1287183 |

| Technical data | Extra |
|--|------------------------|
| Classification ISO 10874 (EN 685) domestic commercial | 23 34 |
| UPEC Classification Impact sound reduction ISO 717/2 | 18 dB |
| Total thickness ISO 24346 (EN 428) | 3,30 mm |
| Wear layer thickness ISO 24340 (EN 429) | 0,70 mm |
| Total weight ISO 23997 (EN 430) | 3,00 kg/m ² |
| PUR Reinforcement - | Extreme protection |
| Wear layer binder content ISO 11638 | Type 1 |
| Colors | 8 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Suitable for high traffic areas
- Acoustic - ideal sound insulation

Available in rolls: 3 m
Rolls length: 22 lm (15 - 22 lm)



All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



Extra collection






Extra / Venus 1



Akron 6*



Akron 7*

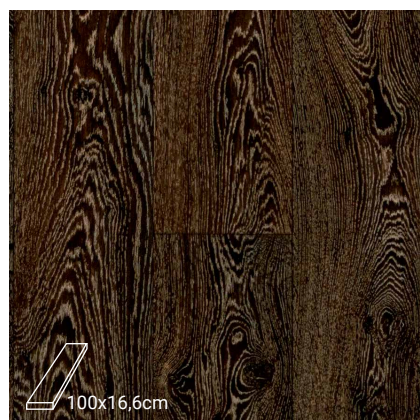

Akron 8*



Venus 1*




Venus 2*



Venus 3*



Venus 4*

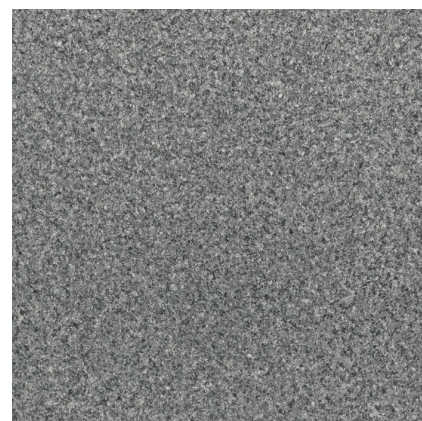

Venus 5*

*DESIGN repeat 1x1m

Spark collection

Collection SPARK offers a true solution for any commercial or light industrial area, with its exquisite durability and ease of maintenance. Modern designs in palette of thirteen colours will accentuate unique style of each interior.

Additional reinforcement "EXTREME PROTECTION" leaves no spot on the floor, where dirt can stay after cleaning.



Spark / M 05



| Desig name | Suggested WR |
|------------|--------------|
| V 01 | 1289803 |
| V 03 | 1287176 |
| V 04 | 1287532 |
| V 05 | 1287183 |
| V 08 | 1287309 |
| M 01 | 1287337 |
| M 02 | 1287337 |
| M 03 | 1287309 |
| M 04 | 1287557 |
| M 05 | 1287451 |
| M 06 | 1287867 |
| M 07 | 1287529 |
| S 02 | 1287153 |

| Technical data | Spark |
|--|------------------------|
| Classification ISO 10874 (EN 685) domestic commercial | 34 43 |
| UPEC Classification Impact sound reduction ISO 717/2 | 14 dB |
| Total thickness ISO 24346 (EN 428) | 2,00 mm |
| Wear layer thickness ISO 24340 (EN 429) | 0,70 mm |
| Total weight ISO 23997 (EN 430) | 2,22 kg/m ² |
| PUR Reinforcement - | Extreme protection |
| Wear layer binder content ISO 11638 | Type 1 |
| Colors | 13 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Suitable for high traffic areas
- Wide variety of abstract designs


Available in rolls: 2 m
Rolls length: 25lm (15 - 25 lm)



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



Spark collection

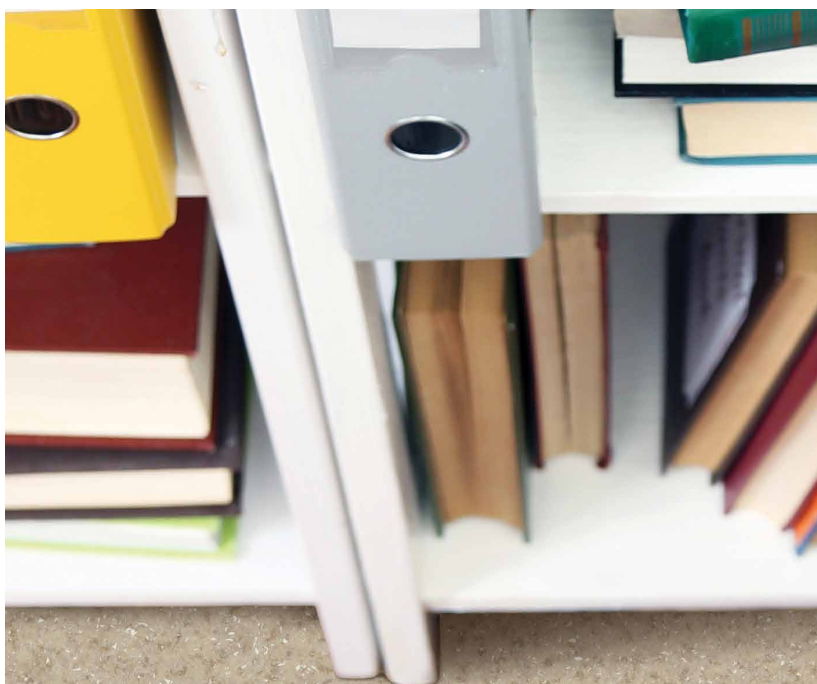

S 02*

Spark / M 04




V 01*



V 03*



V 04*

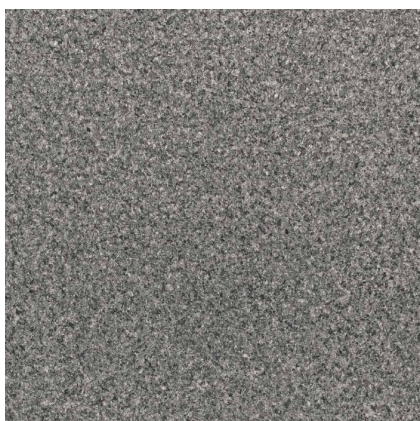

V 05*




V 08*



M 01*



M 02*

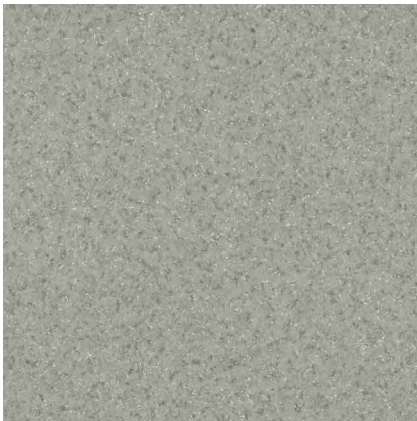

M 03*



M 04*



M 05*



M 06*



M 07*

The strongest and the most dense Tarkett collection is the champion of durability and abrasion resistance.

Unique combination of high wear resistance and universal colors for residential areas, and for frequent spaces, as well. Neutral abstract, or high-quality wood and stone designs accentuate unique style of each interior. Innovative 3D effect provides smooth surface and live structure for extremely easy maintenance.



Force / Canasta 6

Force collection



| Technical data | Force |
|----------------------------------|------------------------|
| Classification | 23 |
| ISO 10874 (EN 685) | 33 |
| domestic commercial | |
| UPEC Classification | |
| Impact sound reduction | 10 dB |
| ISO 717/2 | |
| Total thickness | 2,50 mm |
| ISO 24346 (EN 428) | |
| Wear layer thickness | 0,60 mm |
| ISO 24340 (EN 429) | |
| Total weight | 2,50 kg/m ² |
| ISO 23997 (EN 430) | |
| PUR Reinforcement | Extreme protection |
| - | |
| Wear layer binder content | Type 1 |
| ISO 11638 | |
| Colors | 29 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Suitable for high traffic areas
- Mechanical embossing
- Innovative 3D effect: live structure with smooth surface

Available in rolls: 2,5/3 m
 Rolls length: 30 lm (15 - 30 lm)
 Available in rolls: 3,5 m
 Rolls length: 25 lm (15 - 25 lm)
 Available in rolls: 4 m
 Rolls length: 22 lm (15 - 22 lm)



All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



| Design name | Suggested WR | Design name | Suggested WR |
|-------------|--------------|-------------|--------------|
| Mombasa 2 | 1287160 | Linea 1 | 1291205 |
| Mombasa 3 | 1291681 | Linea 2 | 1294071 |
| Canasta 3 | 1287388 | Linea 3 | 1294089 |
| Canasta 4 | 1287502 | Linea 4 | 1292771 |
| Canasta 6 | 1287541 | Nubia 3 | 1287388 |
| Orleans 4 | 1294428 | Colibri 6 | 1287174 |
| Friza 1 | 1287501 | Gres 1 | 1287502 |
| Sorbona 2 | 1287153 | Gres 2 | 1287026 |
| Sorbona 5 | 1287178 | Gres 3 | 1287003 |
| Sorbona 6 | 1287553 | Maison 1 | 1287531 |
| Jamaica 3 | 1294428 | Maison 2 | 1292465 |
| Samba 12 | 1287050 | Maison 3 | 1287733 |
| Spectra 1 | 1287160 | Maison 4 | 1287426 |
| Spectra 2 | 1287027 | | |

Force collection





NEW

100x20cm

Maison 1*



NEW

100x20cm

Maison 2*



NEW

100x20cm

Maison 3*



NEW

100x20cm

Maison 4*



combined widths

Mombasa 2*



combined widths

Mombasa 3*



100x16,6cm

Canasta 3*



100x16,6cm

Canasta 4*




100x16,6cm

Canasta 6*



100x16,6cm

Friza 1*

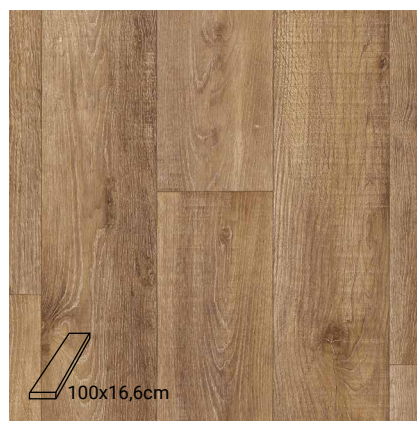

100x16,6cm

Orleans4*



100x10cm

Sorbona 2*

***DESIGN** repeat 1x1m

Force collection





Sorbona 5*



Sorbona 6*



Jamaica 3*




Samba 12*




Spectra 1*




Spectra 2*

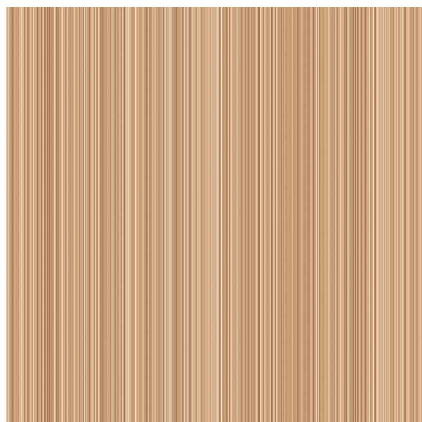

Linea 1*

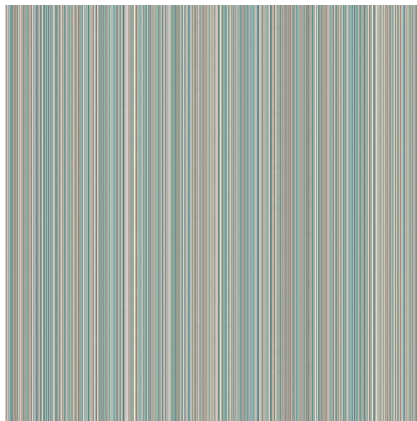

Linea 2*

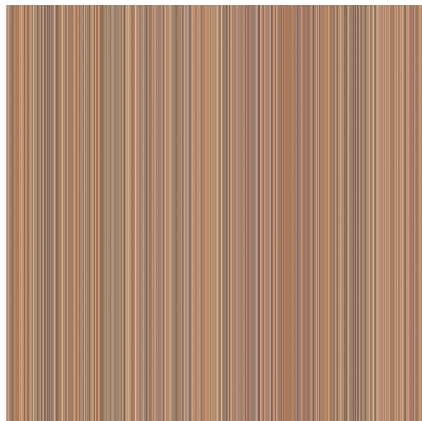

Linea 3*




Force / Spectra 1

***DESIGN** repeat 1x1m

Force collection



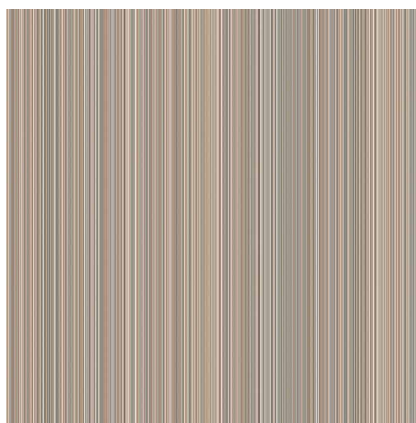


Linea 4*



Canvas 1*



Canvas 2*

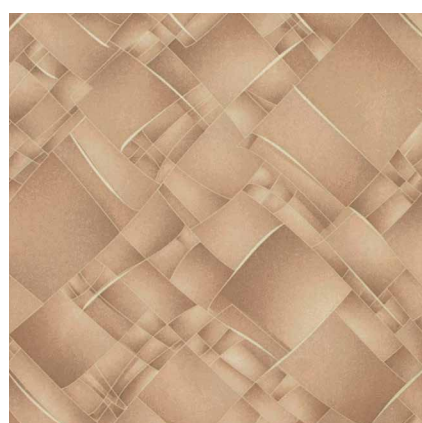

Colibri 6*



Nubia 3*



Gres 1*



Gres 2*



Gres 3*

Legend collection

Cozy and beautiful, with designs inspired by nature, collection Legend is the latest addition to Tarkett range. This floor is soft and pleasant to walk on it, backed with polyester felt and enriched with the look of real wood, achieved with embossed relief that precisely follows printed design.

Legend is additionally reinforced with „Extreme protection“, which leaves no spot on the floor, where dirt can stay after cleaning.





Legend / Westwood 1

| Technical data | Legend |
|----------------------------------|------------------------|
| Classification | 32 |
| ISO 10874 (EN 685) | 23 |
| domestic commercial | |
| UPEC Classification | |
| Impact sound reduction | 17 dB |
| ISO 717/2 | |
| Total thickness | 3,5 mm |
| ISO 24346 (EN 428) | |
| Wear layer thickness | 0,50 mm |
| ISO 24340 (EN 429) | |
| Total weight | 2,47 kg/m ² |
| ISO 23997 (EN 430) | |
| PUR Reinforcement | Extreme protection |
| - | |
| Wear layer binder content | Type 1 |
| ISO 11638 | |
| Colors | 6 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Suitable for high traffic areas
- Soft and pleasant to walk on it, thanks to textile backing
- The most realistic appearance of natural wood texture thanks to innovative technology

Available in rolls: 2,5/3/3,5 m
 Rolls length: 25 lm (15 - 25 lm)
 Available in rolls: 4 m
 Rolls length: 22 lm (15 - 22 lm)



All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



Legend collection



Legend / Archer 1



Archer 1*



Archer 2*



Portland 5*



Portland 6*



Westwood 1*



Westwood 2*

Absolut collection

Vinyl floor has never felt and looked so natural before. Each design and color in collection Absolut has been carefully chosen, so it could bring cozy feelings of relaxation and warmth in every home where it is installed.

Designs inspired by nature, with relief and texture that is more alive and realistic than ever, exude and speak of elegance and sophistication with its appearance and high quality construction. A true masterpiece in floor covering industry, this collection is the choice of those who always admire to, and wish to have the best.





Absolut / Tower 1


| Technical data | Absolut |
|----------------------------------|------------------------|
| Classification | 23 |
| ISO 10874 (EN 685) | 31 |
| domestic commercial | |
| UPEC Classification | |
| Impact sound reduction | 16 dB |
| ISO 717/2 | |
| Total thickness | 3,00 mm |
| ISO 24346 (EN 428) | |
| Wear layer thickness | 0,45 mm |
| ISO 24340 (EN 429) | |
| Total weight | 2,45 kg/m ² |
| ISO 23997 (EN 430) | |
| PUR Reinforcement | Extreme protection |
| - | |
| Wear layer binder content | Type 1 |
| ISO 11638 | |
| Colors | 24 |

For more detailed technical information, please contact Tarkett.


Main product FEATURES

- Suitable for high-traffic areas
- The most realistic appearance of natural wood texture thanks to innovative technology

Available in rolls: 2,5/3 m
 Rolls length: 30 lm (15 - 30 lm)
 Available in rolls: 3,5 m
 Rolls length: 25 lm (15 - 25 lm)
 Available in rolls: 4 m
 Rolls length: 22 lm (15 - 22 lm)



All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



Absolut collection



Absolut / Tudor 1



Liam 1*



Liam 2*



Liam 3*



Liam 4*



Liam 5*



Jasper 1*



Jasper 2*



Jasper 3*



Jasper 4*



Tudor 1*



Tudor 2*



Tudor 3*

Absolut collection



Absolut / Magnus 2



Tudor 4*




Tower 1*




Tower 2*




Tower 3*

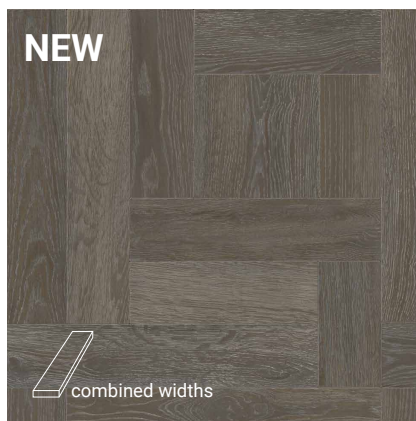

Tower 4*

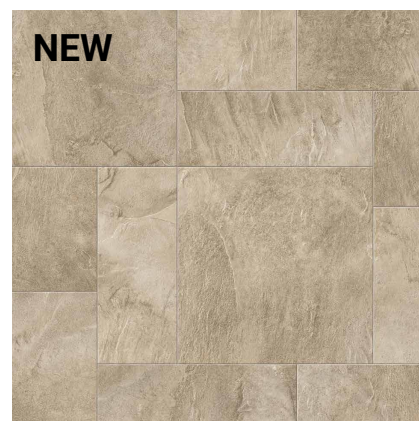

Magnus 1*

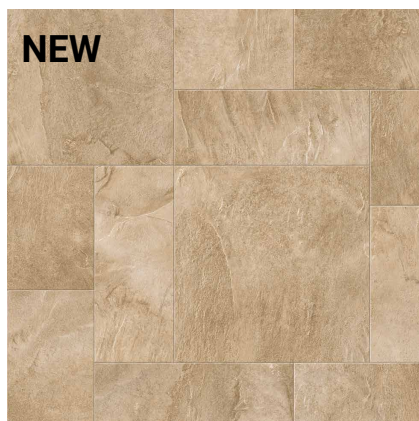

Magnus 2*




Magnus 3*



Magnus 4*



Lenox 1*

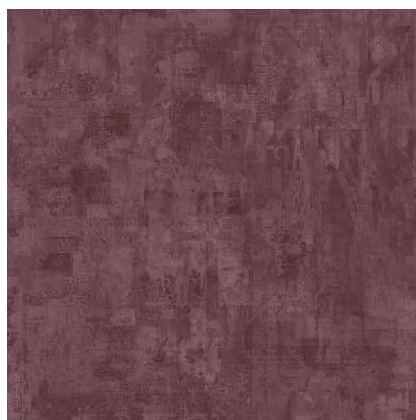

Lenox 2*



Lenox 3*

***DESIGN** repeat 1x1m

Premium collection

Premium quality collection will give your home a note of elegance.

Enriched with innovative design effects - the 3D and the Mineral touch effect, Premium designs will make your everyday life fulfilled with beauty. Special floor construction is reinforced with an additional protective layer, making this collection highly resistant and very easy to maintain.





Premium / Maison 5


| Technical data | Premium |
|--|------------------------|
| Classification ISO 10874 (EN 685) domestic commercial | 23 31 |
| UPEC Classification Impact sound reduction ISO 717/2 | 16 dB |
| Total thickness ISO 24346 (EN 428) | 3,20 mm |
| Wear layer thickness ISO 24340 (EN 429) | 0,30 mm |
| Total weight ISO 23997 (EN 430) | 2,30 kg/m ² |
| PUR Reinforcement - | Extreme protection |
| Wear layer binder content ISO 11638 | Type 1 |
| Colors | 21 |

For more detailed technical information, please contact Tarkett.


Main product FEATURES

- Suitable for high traffic areas
- Additional surface treatment - Tarkett Extreme protection
- Mineral touch effect
- 3D effect

Available in rolls: 2,5/3/3,5 m
Rolls length: 28 lm (15 - 28 lm)
Available in rolls: 4 m
Rolls length: 25 lm (15 - 25 lm)

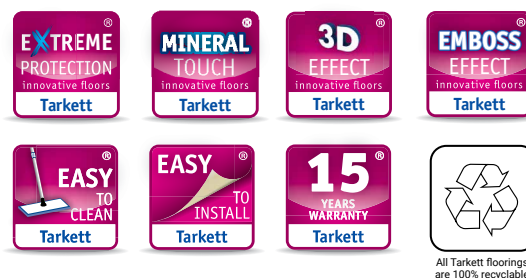

All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



Premium collection



Premium / Nika 1



Maison 2*



Maison 5*



Albus 1*



Albus 2*



Raymond 1*



Raymond 5*



Soho 1*



Soho 2*



Soho 3*



Orleans 3*



Akron 10*



Akron 11*

Premium collection



Premium / Chevron 1




NEW

Chevron 1*




NEW

Chevron 2*

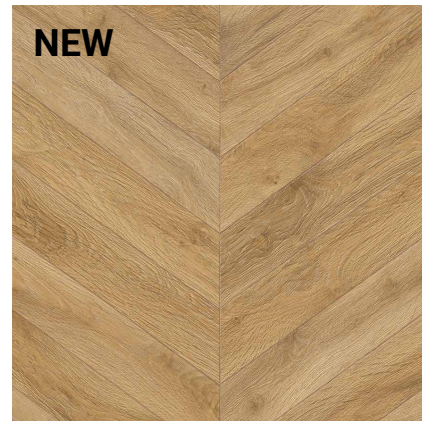


NEW

Chevron 3*

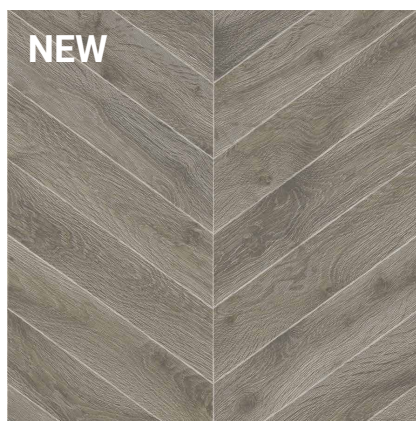

NEW

Chevron 4*

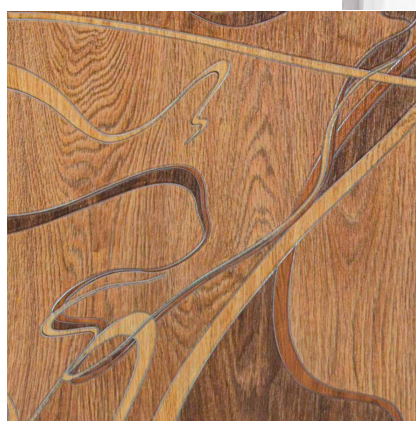


Aston 1*




Aston 2*




 25x25cm

Nika 1*



 25x25cm

Nika 3*

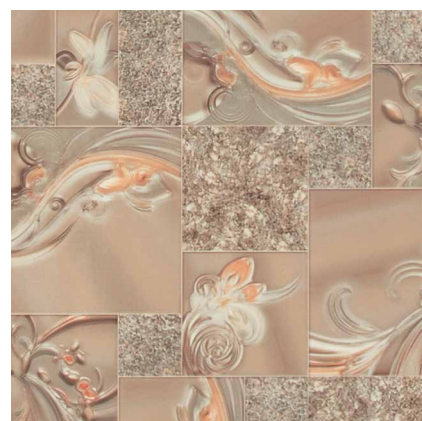

Amelia 2*

***DESIGN** repeat 1x1m

Super S collection


Diverse prints and colors, matt or shiny finish, deep embossing or not - Super S collection offers the possibility to choose the perfect flooring to suit customer's preferences and the existing interior. Easy to install and to clean - it is the perfect collection for home. Throughout the years, millions have chosen comfort with tradition - Super S collection.



Super S / Eliot 5



Eliot 5*

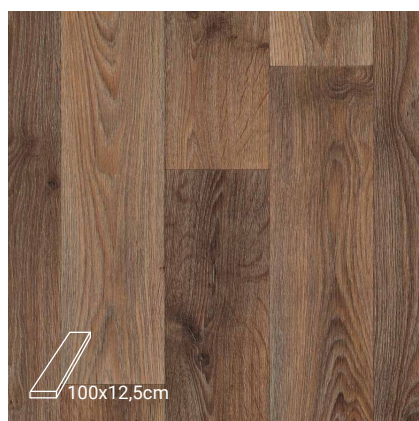

Eliot 6*



Broadway 1*



Canasta 6*

| Technical data | | Super S |
|----------------------------------|---|------------------------|
| Classification | ISO 10874 (EN 685) domestic commercial | 23 |
| UPEC Classification | Impact sound reduction ISO 717/2 | 19 dB |
| Total thickness | ISO 24346 (EN 428) | 3,00 mm |
| Wear layer thickness | ISO 24340 (EN 429) | 0,25 mm |
| Total weight | ISO 23997 (EN 430) | 1,90 kg/m ² |
| PUR Reinforcement | - | Extreme protection |
| Wear layer binder content | ISO 11638 | Type 1 |
| Colors | | 4 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Additional surface treatment - Tarkett Extreme protection

Available in rolls: 2,5/3/3,5/4 m
Rolls length: 30 lm (15 - 30 lm)



All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.

| | |
|-----------|---|
| CE | Manufactured by: Tarkett d.o.o. Bačka Palanka Industrijska zona 14 21400 Bačka Palanka SERBIA |
|-----------|---|


Evolution collection

Stylish and easy to live with, Tarkett offers the perfect recipe for kitchens & dinning rooms - Evolution collection. Wide palette of colors and patterns, with PUR treatment for better quality. This collection represents the evolution of quality, style and design, made with matt or shiny finish.


Easy to install and to clean, it is suitable for any room.



Evolution / Chevron 5

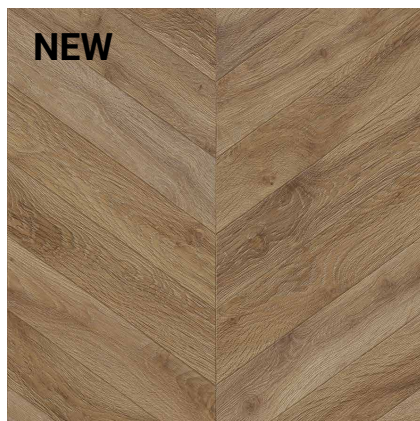

Chevron 5*

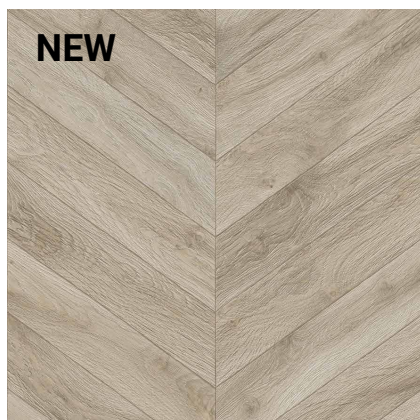

Chevron 6*



Albus 3*

| Technical data | Evolution |
|--|------------------------|
| Classification ISO 10874 (EN 685) domestic commercial | 22 |
| UPEC Classification Impact sound reduction ISO 717/2 | 18 dB |
| Total thickness ISO 24346 (EN 428) | 2,70 mm |
| Wear layer thickness ISO 24340 (EN 429) | 0,20 mm |
| Total weight ISO 23997 (EN 430) | 1,75 kg/m ² |
| PUR Reinforcement - | Extreme protection |
| Wear layer binder content ISO 11638 | Type 1 |
| Colors | 15 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Mineral touch
- Acoustic

Available in rolls: 2,5/3/3,5/4 m
Rolls length: 33 lm (15 - 33 lm)



All Tarkett floorings are 100% recyclable



Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.

| | |
|-----------|---|
| CE | Manufactured by: Tarkett d.o.o. Bačka Palanka Industrijska zona 14 21400 Bačka Palanka SERBIA |
|-----------|---|

Evolution collection



Evolution / Raymond 4



Mombasa 5*



Raymond 2*



Raymond 4*



Wagner 1*



Wagner 2*




Tobago 2*



Bavaria 3*



Nika 2*

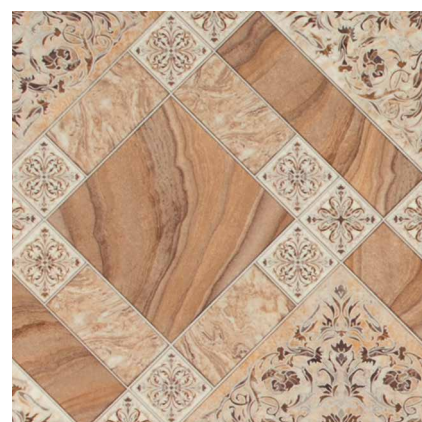


Venezia 2*


Evolution Glanz



Trinidad 20*

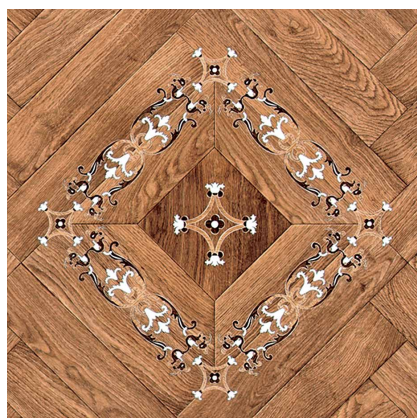

Palladio 20*

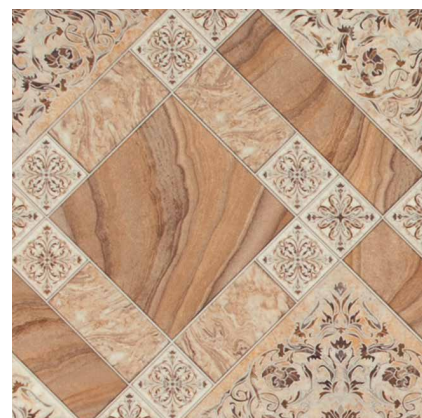

Venezia 20*

Optima collection

Optima collection offers a beautiful and obtainable solution for any room. With range of designs and widths, this affordable and practical floor will bring natural look to your home.




Optima / Trevi 1




Broadway 2* 1x1m



Madison 1*

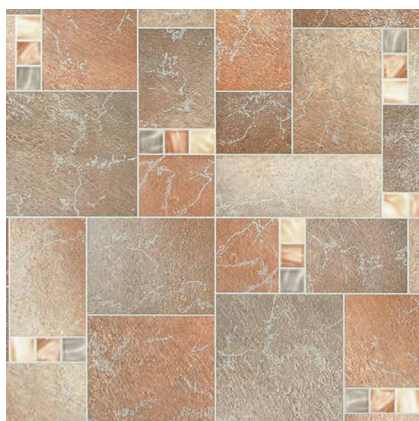

Trevi 1*

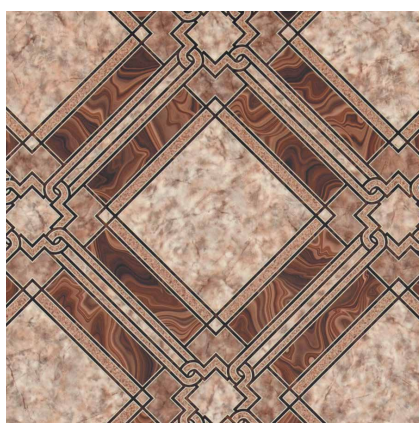

Rialto 3*


| Technical data | Optima |
|--|------------------------|
| Classification ISO 10874 (EN 685) domestic commercial | 22 |
| UPEC Classification Impact sound reduction ISO 717/2 | 8 dB |
| Total thickness ISO 24346 (EN 428) | 1,40 mm |
| Wear layer thickness ISO 24340 (EN 429) | 0,20 mm |
| Total weight ISO 23997 (EN 430) | 1,40 kg/m ² |
| PUR Reinforcement - | Extreme protection |
| Wear layer binder content ISO 11638 | Type 1 |
| Colors | 4 |

For more detailed technical information, please contact Tarkett.

Main product FEATURES

- Additional surface treatment - Tarkett Extreme protection

Available in rolls: 2,5/3/3,5 m
Rolls length: 45 lm (15 - 45 lm)
Available in rolls: 4 m
Rolls length: 40 lm (15 - 40 lm)




Specifications of the product may be changed for the better, without prior notice. Installation of the floor should be carried out in accordance with manufacturer's recommendations.



Installing your vinyl flooring


Tarkett's tips and tricks

BEFORE INSTALLATION, ONLY PREPARATION COUNTS!




Prepare YOUR SUBFLOOR

Remove the existing flooring properly. The subfloor must be dry. Do not forget to remove grease marks from the surface to cover. If the subfloor is uneven, use a levelling compound. Clean the subfloor thoroughly using water and a neutral cleaning agent.



Prepare YOUR FLOORING


It is extremely important to acclimate your flooring to the room conditions: store your flooring in the room to be installed for 24 hours minimum at room temperature. Unroll and pre-cut your product before starting the installation. This could prevent the disappointment such as not having enough material. How long should the cuts be? Always add an extra 15 to 20 cm in length.



Prepare YOUR TOOL


There are 3 installation methods:

1 GLUED installation (using acrylic glue)

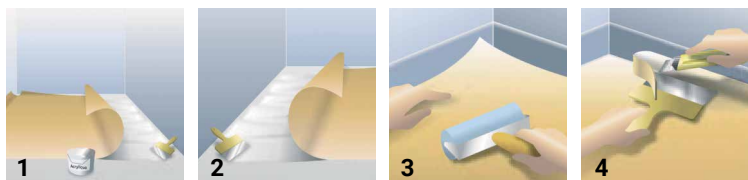

The glued installation method is particularly recommended when renovating premises submitted to high traffic. Roll back half the sheet and apply the adhesive on the surface with dented spatula. Carefully unroll your vinyl and press firmly in place. Apply pressure starting from the middle and working from the edge. Proceed the same way for the other half. Trim away any excess material around the walls with a hook blade knife. The use of utility knives is not recommended.

2 SEMI-LOOSE installation (using duct tape)

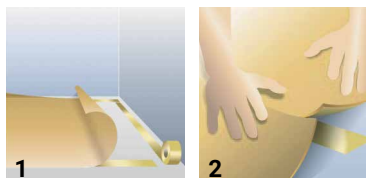

This installation method is adapted to rooms submitted to intense traffic. Position double-sided tape along the perimeter of the room and secure the flooring to the subfloor.

3 LOOSE installation

Loose installation is suitable for rooms of a size smaller than 25m² and submitted to moderate traffic (bedrooms). It is the same as the semi-loose installation method without double-sided tape. If your installation requires a seam, you must secure it with double-sided tape.




COLD SEAM SEALING

If your installation requires a seam, it is strongly recommended to seal them using the cold seam sealing technique to ensure perfect water-tightness and to avoid unpleasant dirt lines between the rolls.

Look at this 4-step cold seam sealing method:

1. Apply adhesive tape along the centre of the cut seam
2. Cut the adhesive tape at the seam
3. Cover the flaps with a new strip of adhesive tape before cutting the seam
4. Apply the cold seam sealer

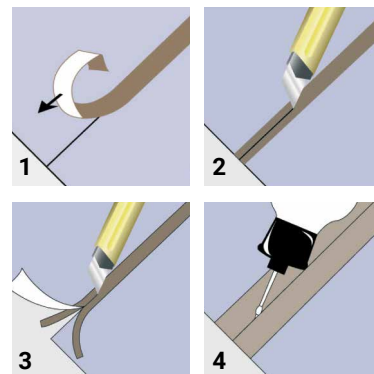


MAINTENANCE: EASY TO CLEAN!

Proper cleaning and maintenance is the best way to make your flooring more durable and look new for a long period of time. This will also contribute to your household overall hygiene. Tarkett vinyl floorings are so easy to maintain, that it is the winning option for today's busy lifestyles!




After installation: Clean your flooring with hot water and a neutral cleaning agent, and rinse it. Daily regular cleaning: sweeping or vacuuming your floor is all it takes! Weekly regular cleaning: once a week, or as often as required, use a damp mop or a floor cloth with warm water, and a neutral cleaning agent.

LAYING DIRECTIONS

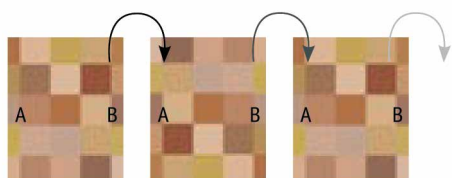

Laying in the same direction

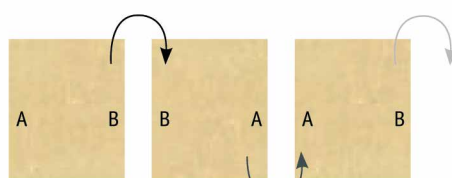

Laying in reverse direction

TARKETT'S ANTI-STAIN SECRETS

ALCOHOL
RUBBER
PETROL
FELT
PEN
TAR
GREASE
PAINT

> rub with a detergent
and rinse

TOMATO
MUSTARD
INK
BLOOD

> use a small amount
of bleach or spirit
vinegar

RUST

> Clean up with
an anti-rust
liquid

Do not use soft soap, linseed oil products, acetone. Do change the rubber feet of your furniture with plastic ones.



■ **SERBIA:** Tarkett SEE, Industrijska zona bb, 21400 Bačka Palanka, Phone: +381 21 7557 649, Fax: +381 21 7557 637, www.tarkett.rs
■ **BOSNIA AND HERZEGOVINA:** Tarkett SEE, Branka Popovića 27a, 78000 Banja Luka, Phone: +387 65 402 221, Fax: +387 65 770 565, www.tarkett.ba
■ **CROATIA:** TSEE, Buzinski prilaz 10, 10000 Zagreb, Phone: +385 91 444 1520, www.tarkett.hr
■ **BULGARIA:** Tarkett SEE, Bul. Evlogi Georgiev 39, 1142 Sofia, Phone: +359 2 986 7988, Fax: +359 2 986 7987, www.tarkett.bg
■ **ROMANIA:** TSEE, Willbrook Platinum Business & Convention Center 172 – 176 Bucharest - Ploiesti Road Building "A", 3rd floor, Sector 1, 013697 Bucharest, Phone: +4 021 224 01 24, Fax: +4 021 224 01 34, www.tarkett.ro