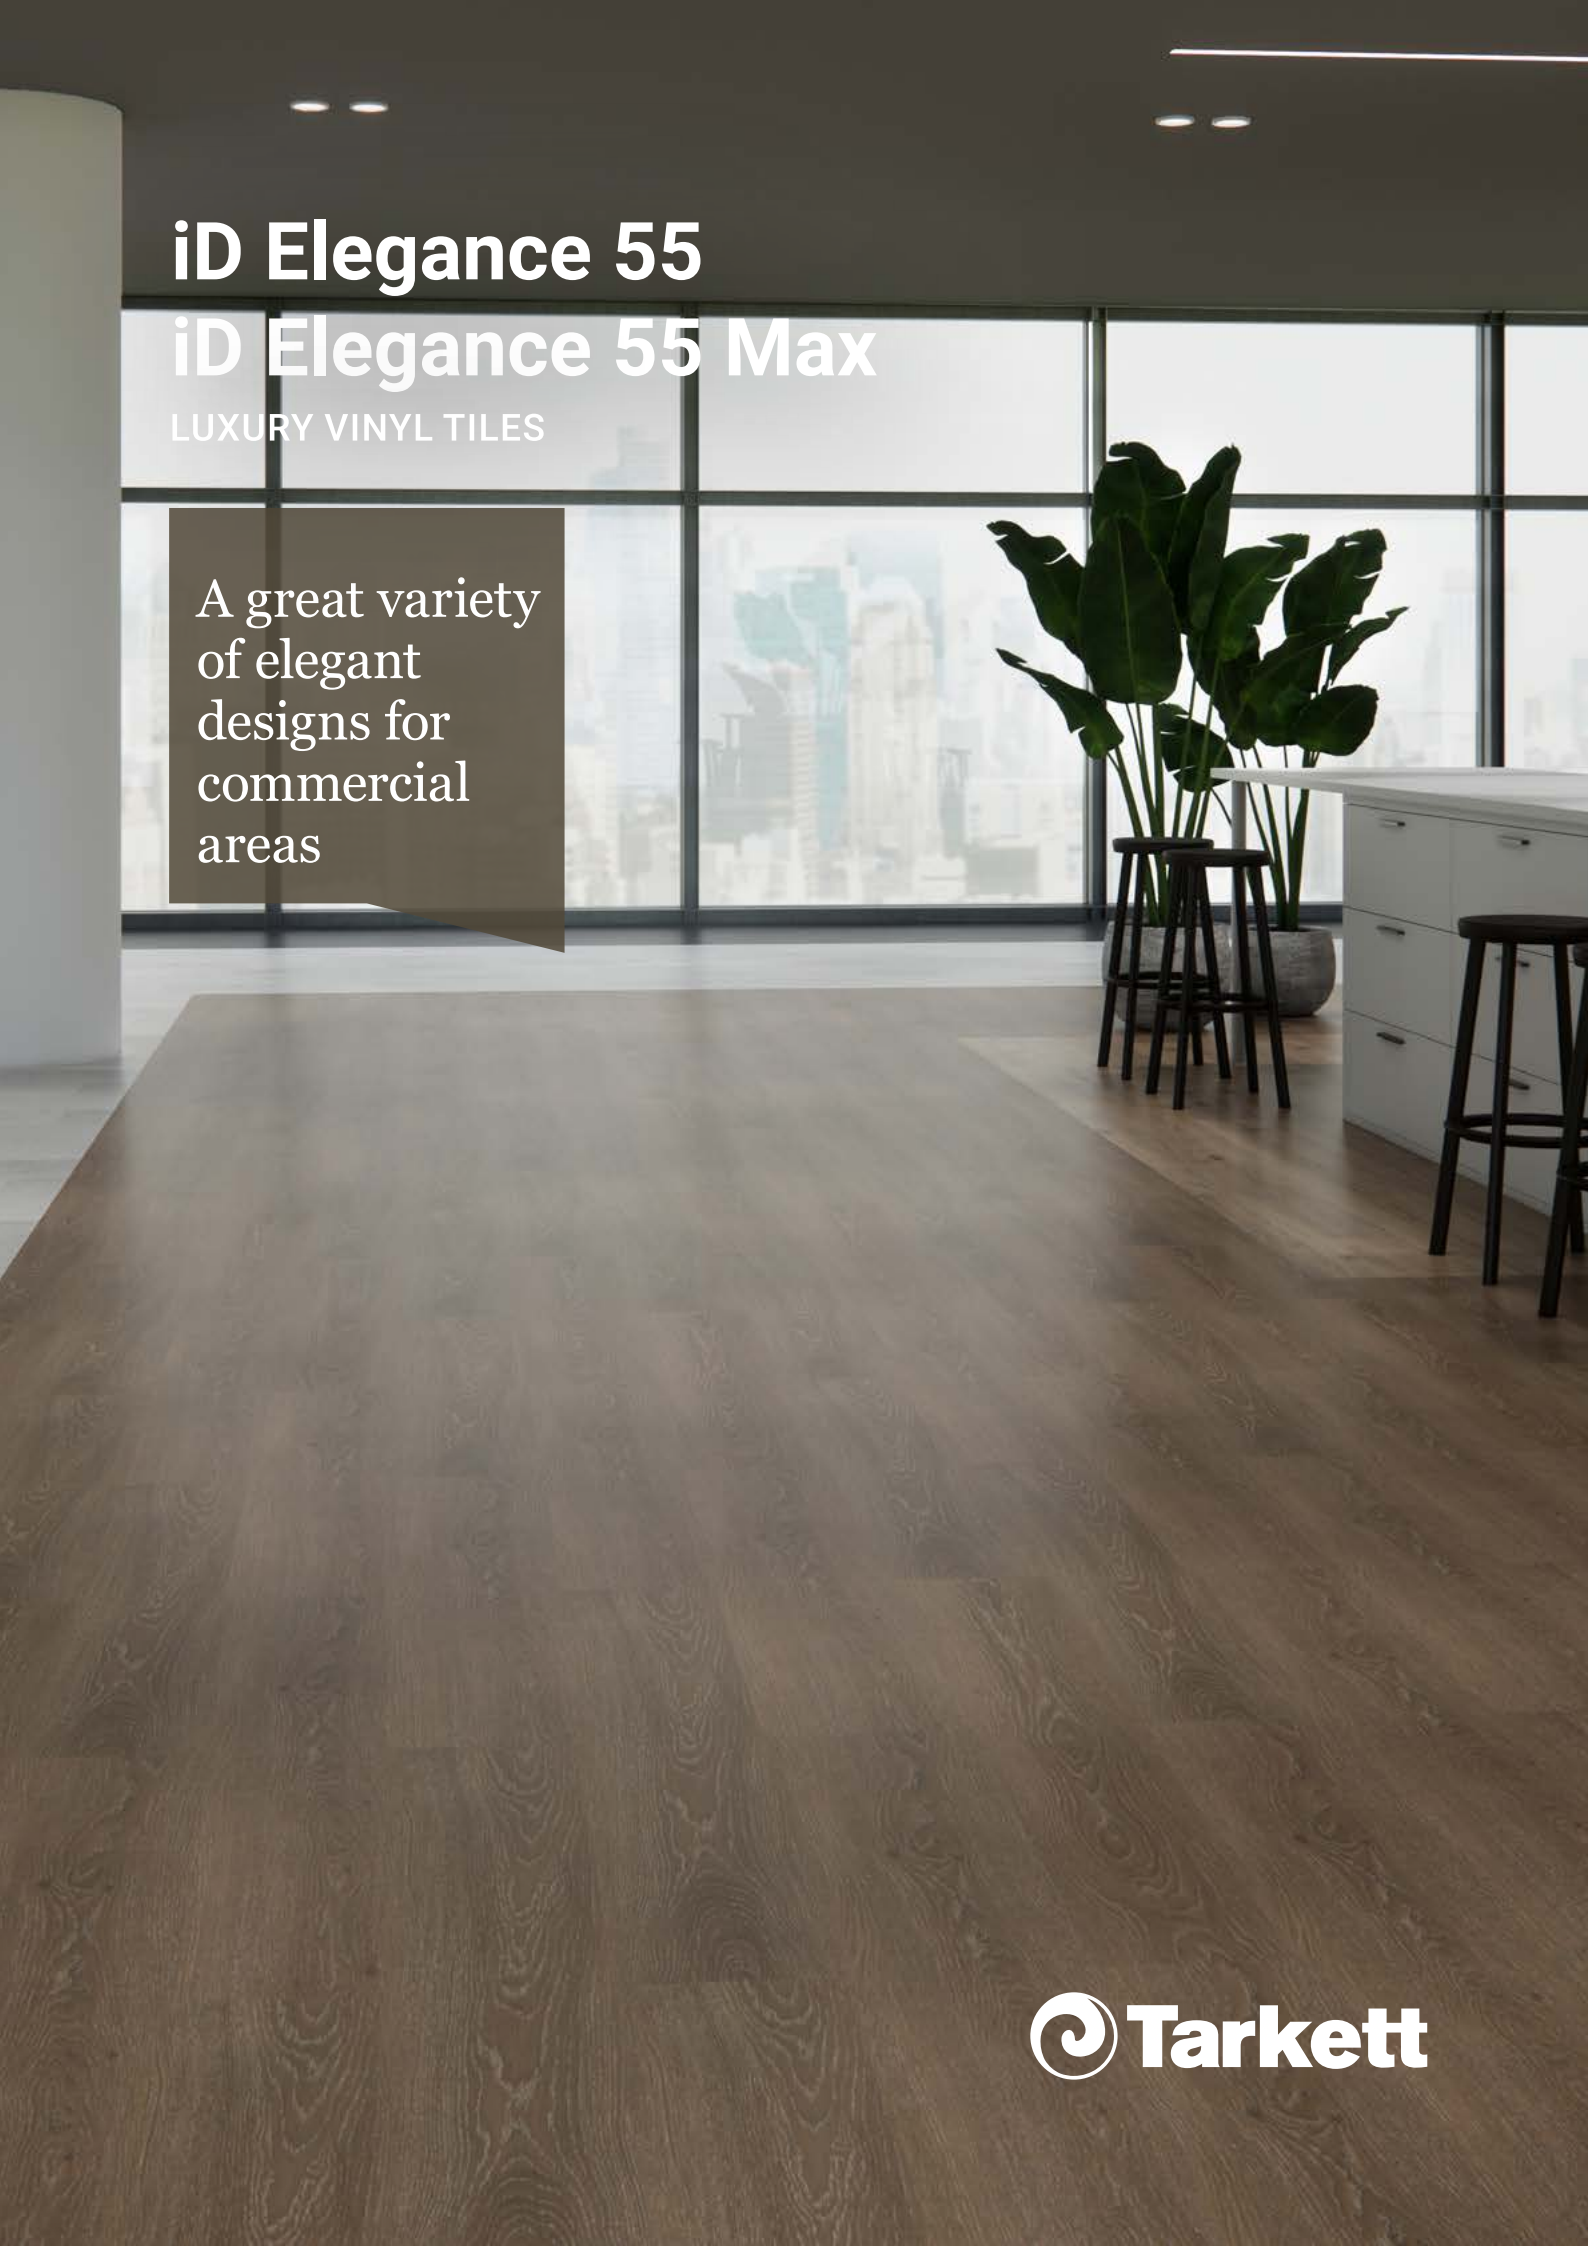


A modern office interior featuring large windows overlooking a city skyline. The floor is covered in wood-look vinyl tiles. A large potted plant sits on a small wooden platform near a white desk and black stools. A dark brown text box is overlaid on the left side of the image.

iD Elegance 55

iD Elegance 55 Max

LUXURY VINYL TILES

A great variety
of elegant
designs for
commercial
areas


 **Tarkett**



With 50 different designs and a 0.55mm wear layer, iD Elegance 55 series is the perfect solution for classy high traffic areas! It includes a wide range of realistic woods to bring authenticity and a sense of home-feeling to workplace areas. Cement and slate designs are a great solutions for modern and industrial interiors.

A SUSTAINABLE solution

Through our Tarkett Human-Conscious Design® approach, we develop flooring that helps people flourish in their every day without compromising on health and the environment. With 90% of time spent indoors, clear air matters. Our LVT collections showcase ultra low VOC emissions, less than 100µg / m³ TVOC after 28 days. Our LVT is also phthalate-free. It contributes to healthier spaces and helps you reach green building certifications like WELL and LEED.

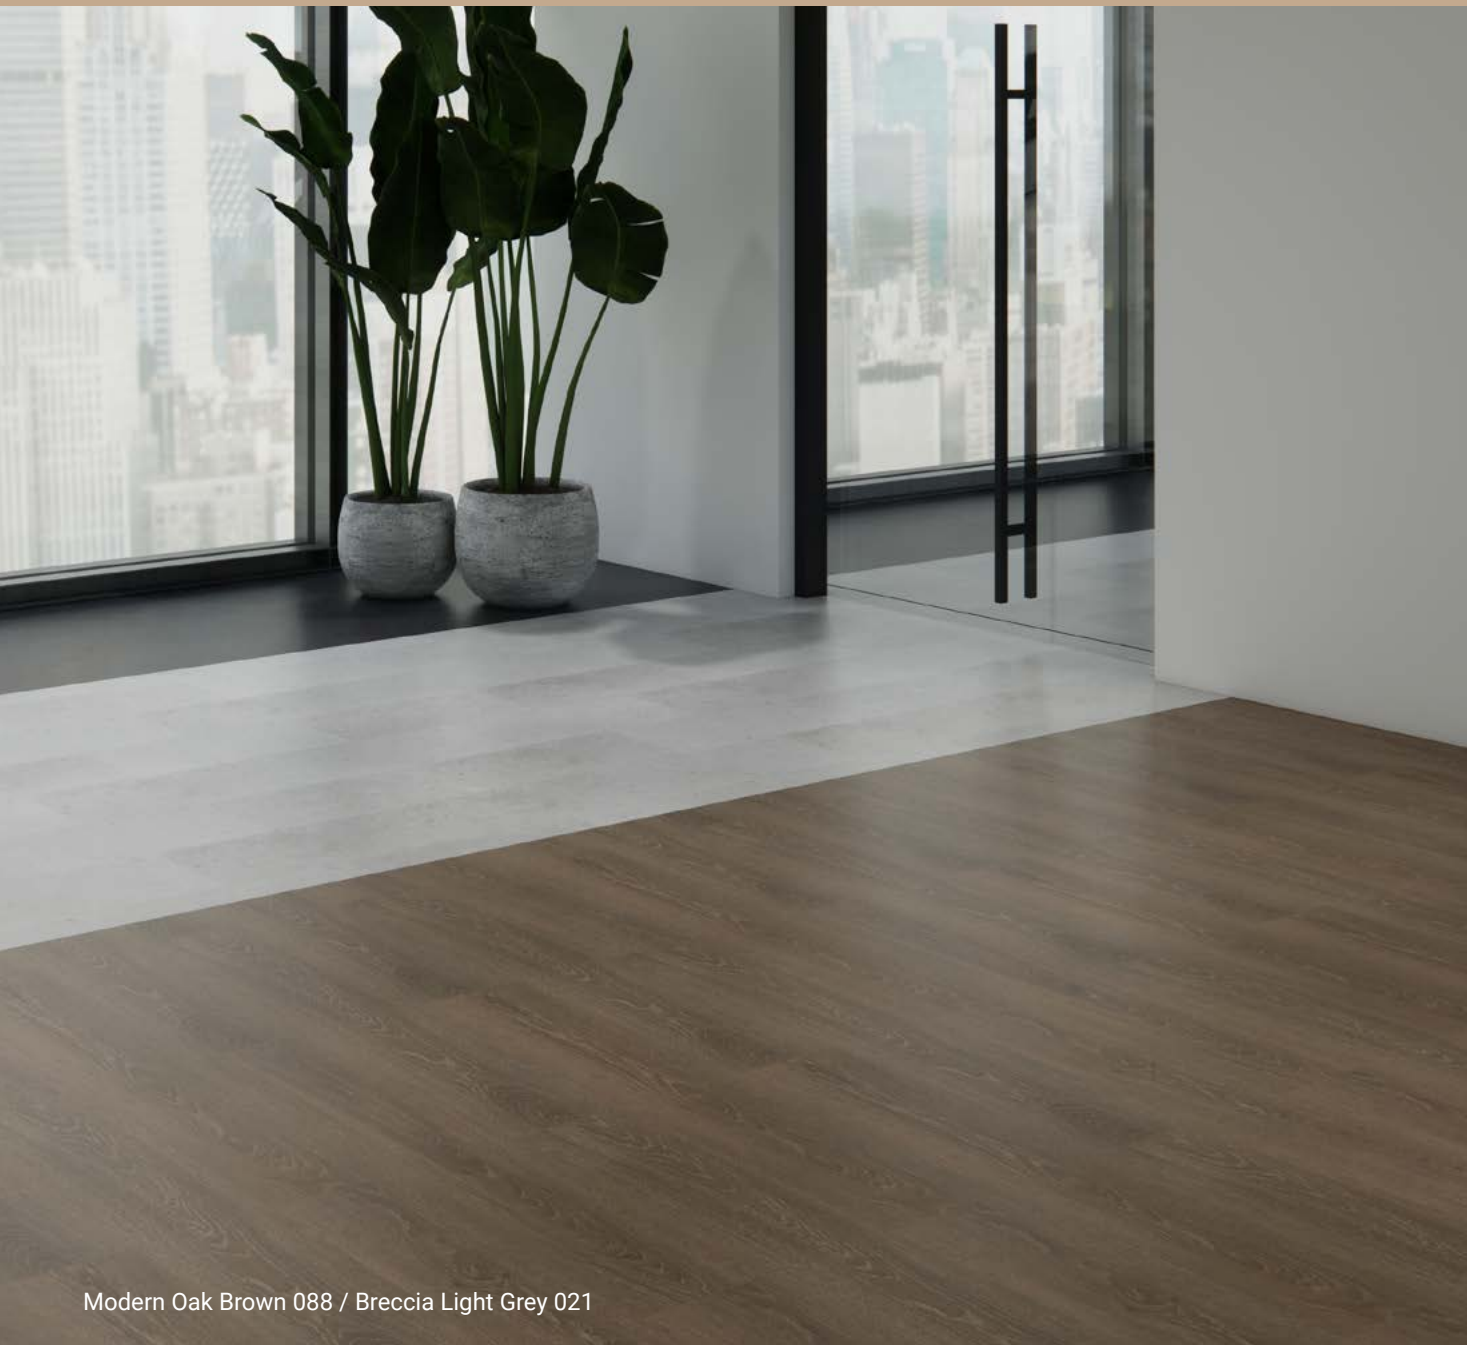

Modern Oak Brown 088 / Breccia Light Grey 021

GREAT Design Options

68 colour options and 9 different surface aspects.

Plank and tile dimensions that you can combine to compose your own flooring expressions.

Our designs are printed on high quality decorative layer that recreates the look and feel of wood, stone, cement and other textures so well that it could be mistaken for the actual material.

Wide range of CUSTOMISATION options from designs to formats with low minimum order quantity!

RECREATE The Realism

Thanks to a 100% matte finish, our product resembles to the original material.

3 patterns and 5 different colours are available with embossing in register. This technique is used to create a precise texture that enhances a wood design. The surface is carved to match the natural essence of the wood, but unlike real wood, the surface interior does not absorb water and dirt and can be easily cleaned.


DURABLE Resistance and EASY Cleaning

0.55 mm Wear Layer suitable for high traffic commercial areas.

Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance, reducing the need for water, energy and chemical detergents.

GLUE DOWN LUXURY VINYL TILE


THE SIMPLE & RESISTANT SOLUTION

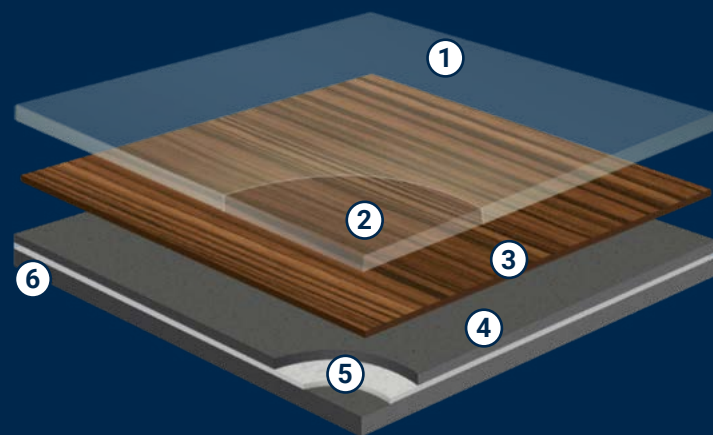


Formats

3 standard formats and 2 additional formats available on request.

Standard Formats

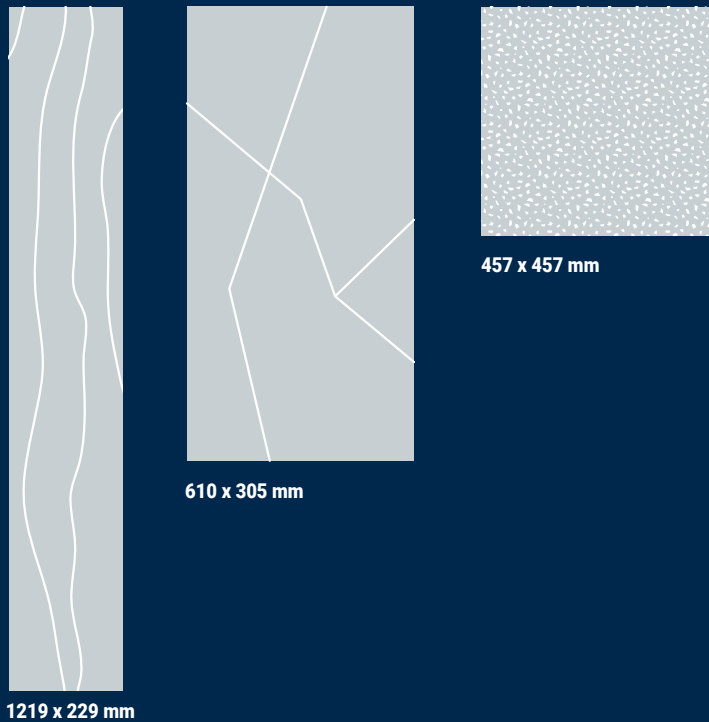

Formats available on request

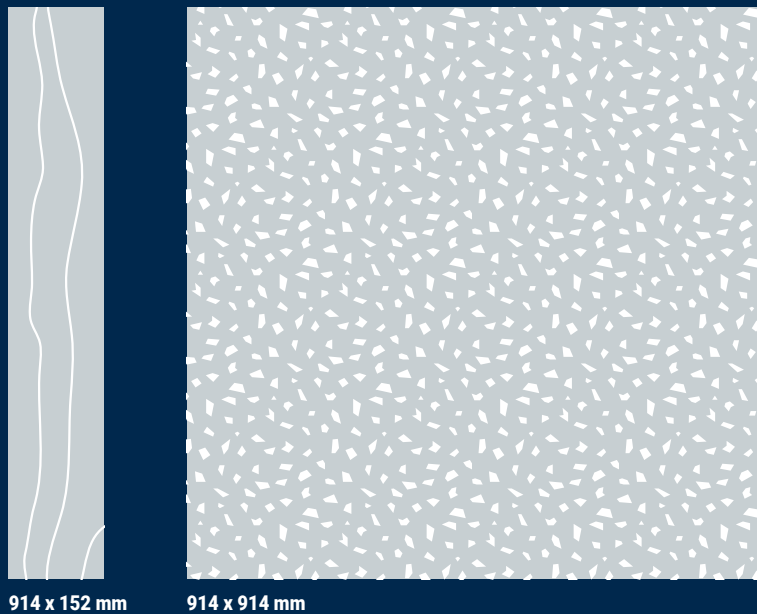

*Formats are specific per design.
Please contact Tarkett sales representative for customization possibility.

①
Polyurethane treatment (PUR) on top
for excellence resistance to abrasion, scratches, and easy & low cost maintenance

②
A transparent wear layer, made of PVC 0.55mm
for an exceptional hard-wearing and indentation-resistant surface

③
Printed film
High definition design replicating the authenticity of natural materials

④
Core layer
made of PVC

Available in 2.5mm and 3mm constructions

⑤
Fiber glass reinforcement
for improved durability and dimensional stability

⑥
Backing layer
made of PVC for glue down installation

COUNTRY OAK



Beige EIR Natural EIR Grey EIR

CERUSED OAK
CHARM OAK



Beige EIR Beige EIR

ASPEN OAK



Grey Beige

BEECH
DELICATE OAK




Natural Natural Light Brown Beige Brown Light Beige

BRECCIA




Light Grey




Black

CEMENT



Grey



Medium Dark

MARBLE



Classic

ORIGINAL SLATE



Black



Grey

MODERN OAK



White Light Beige Beige Light Brown Brown Natural

PRIMARY PINE




Natural White

SMOKED OAK




Black Brown Natural Light Grey White

STANDSTONE




Black

STONEART



Medium Grey

TERRAZZO




Classic

VENEZIA



Grey



Beige

ABSTRACT



Dark Grey



Light Grey



Steel Blue

LINEART



Light blue



Sand

LINEFLOW



Light Grey



Medium Grey



Blue

SOFT OAK



Brown Natural Beige Light Grey White Light Brown Light Beige

TEAK



Natural

WALNUT
VERSAILLES OAK



Light Brown



Light Brown




Dark Brown

LINEN



Dark Blue Green Middle Blue Orange Red Brown

TISSE

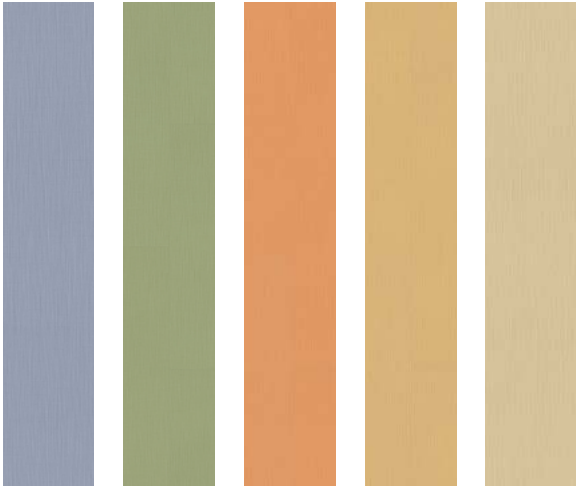

Pale Blue Pale Green Pale Orange Pale Yellow Yellow

COUNTRY OAK

The Country Oak, with its registered embossing, is a traditional and classic wood. Its timeless elegance is reassuring.

Dimensions:
1219 x 229 mm



Country Oak Beige EIR 004



Country Oak Natural EIR 008




Country Oak Grey EIR 007



Country Oak Natural EIR 008

A close-up view of a light beige oak laminate flooring with a natural wood grain pattern. The planks are arranged in a staggered layout, showing various knots and textures. The color is a warm, light tan with subtle variations in tone.

COUNTRY OAK BEIGE EIR
iD Elegance 55 256114004
iD Elegance 55 Max 256113004

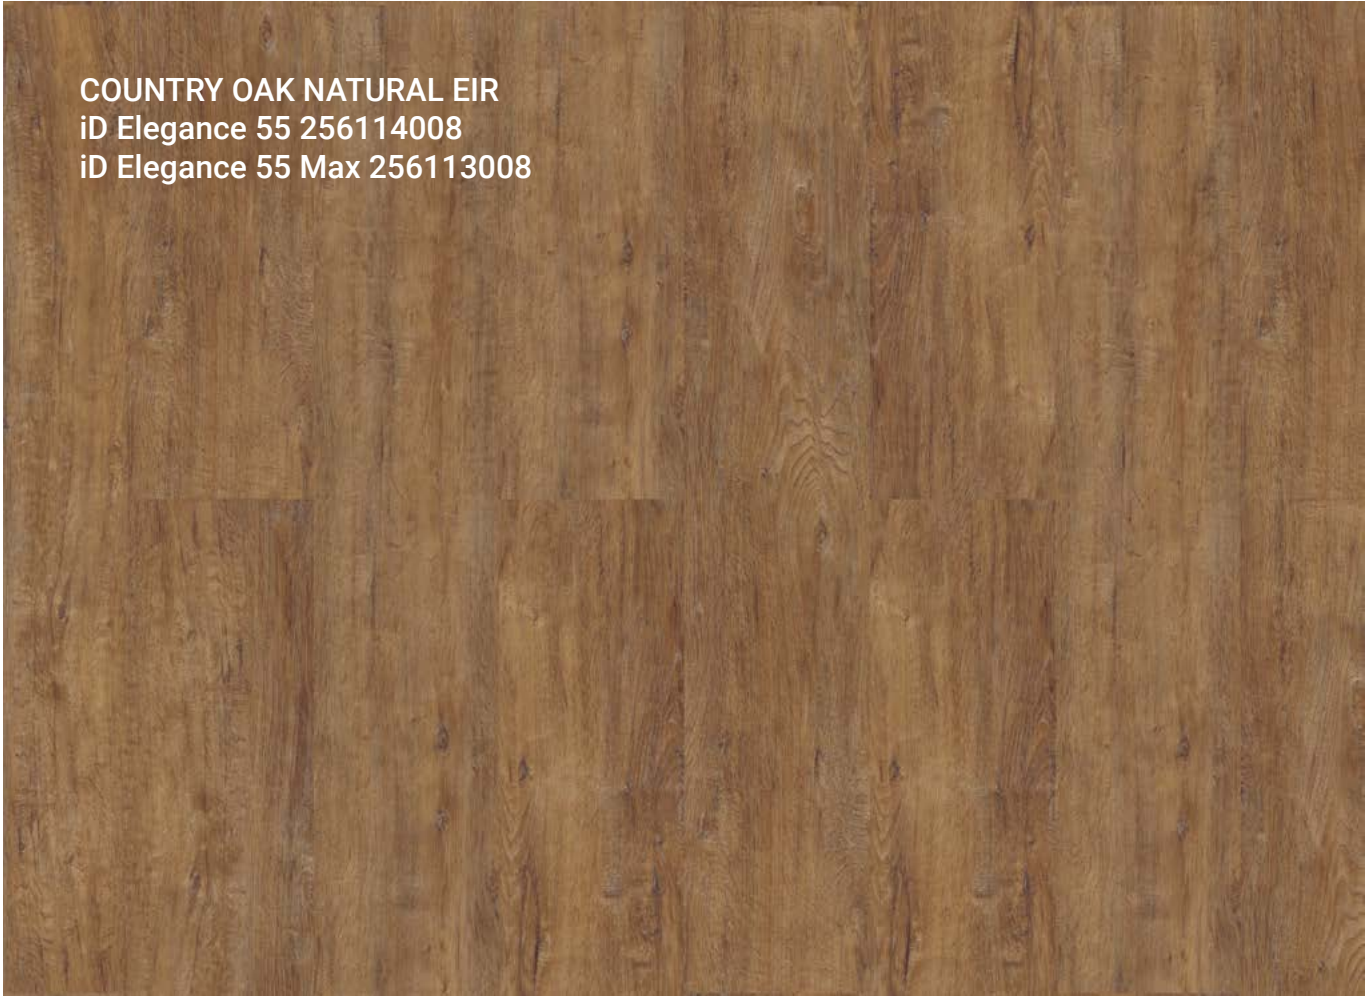A close-up view of a medium brown oak laminate flooring with a natural wood grain pattern. The planks are arranged in a staggered layout, showing various knots and textures. The color is a rich, warm brown with subtle variations in tone.

COUNTRY OAK NATURAL EIR
iD Elegance 55 256114008
iD Elegance 55 Max 256113008

A close-up view of a dark grey oak laminate flooring with a natural wood grain pattern. The planks are arranged in a staggered layout, showing various knots and textures. The color is a deep, charcoal grey with subtle variations in tone.

COUNTRY OAK GREY EIR
iD Elegance 55 256114007
iD Elegance 55 Max 256113007



CERUSED OAK

The Cerused Oak is a trendy lightwood. The variations of colors in the planks play with the contrasts and create a realistic effect. This design offers a lively range of colors and structures.

Cerused Oak Beige EIR
iD Elegance 55 256114001
iD Elegance 55 Max 256113001

Dimensions:
1219 x 229 mm





CHARM OAK

The Charm Oak is a classic and charming limed wood. Its embossed in register surface brings extra authenticity and its delicate style adds softness and wellness in interiors.

Charm Oak Beige EIR
iD Elegance 55 256114009
iD Elegance 55 Max 256113009

Dimensions:
1219 x 229 mm



ASPEN OAK

The classic aspen oak, in a natural color, is a timeless wood. It will be in harmony with all styles

Dimensions:
1219 x 229 mm



Aspen Oak Grey 022



Aspen Oak Beige 021



Aspen Oak Natural 023



Aspen Oak Natural 023

A close-up view of Aspen Oak Grey laminate flooring. The planks are arranged in a staggered pattern, showing a dark grey-brown color with a realistic oak wood grain texture. The grain runs vertically across the image.

ASPEN OAK GREY
iD Elegance 55 256030022
iD Elegance 55 Max 256109022

A close-up view of Aspen Oak Beige laminate flooring. The planks are arranged in a staggered pattern, showing a light beige or cream color with a realistic oak wood grain texture. The grain runs vertically across the image.

ASPEN OAK BEIGE
iD Elegance 55 256030021
iD Elegance 55 Max 256109021

A close-up view of Aspen Oak Natural laminate flooring. The planks are arranged in a staggered pattern, showing a warm, medium-brown color with a realistic oak wood grain texture. The grain runs vertically across the image.

ASPEN OAK NATURAL
iD Elegance 55 256030023
iD Elegance 55 Max 256109023




BEECH

The classic beech, in a natural color, is a timeless wood. It will be in harmony with all styles.

Beech Natural
iD Elegance 55 256030038
iD Elegance 55 Max 256109038

Dimensions:
1219 x 229 mm

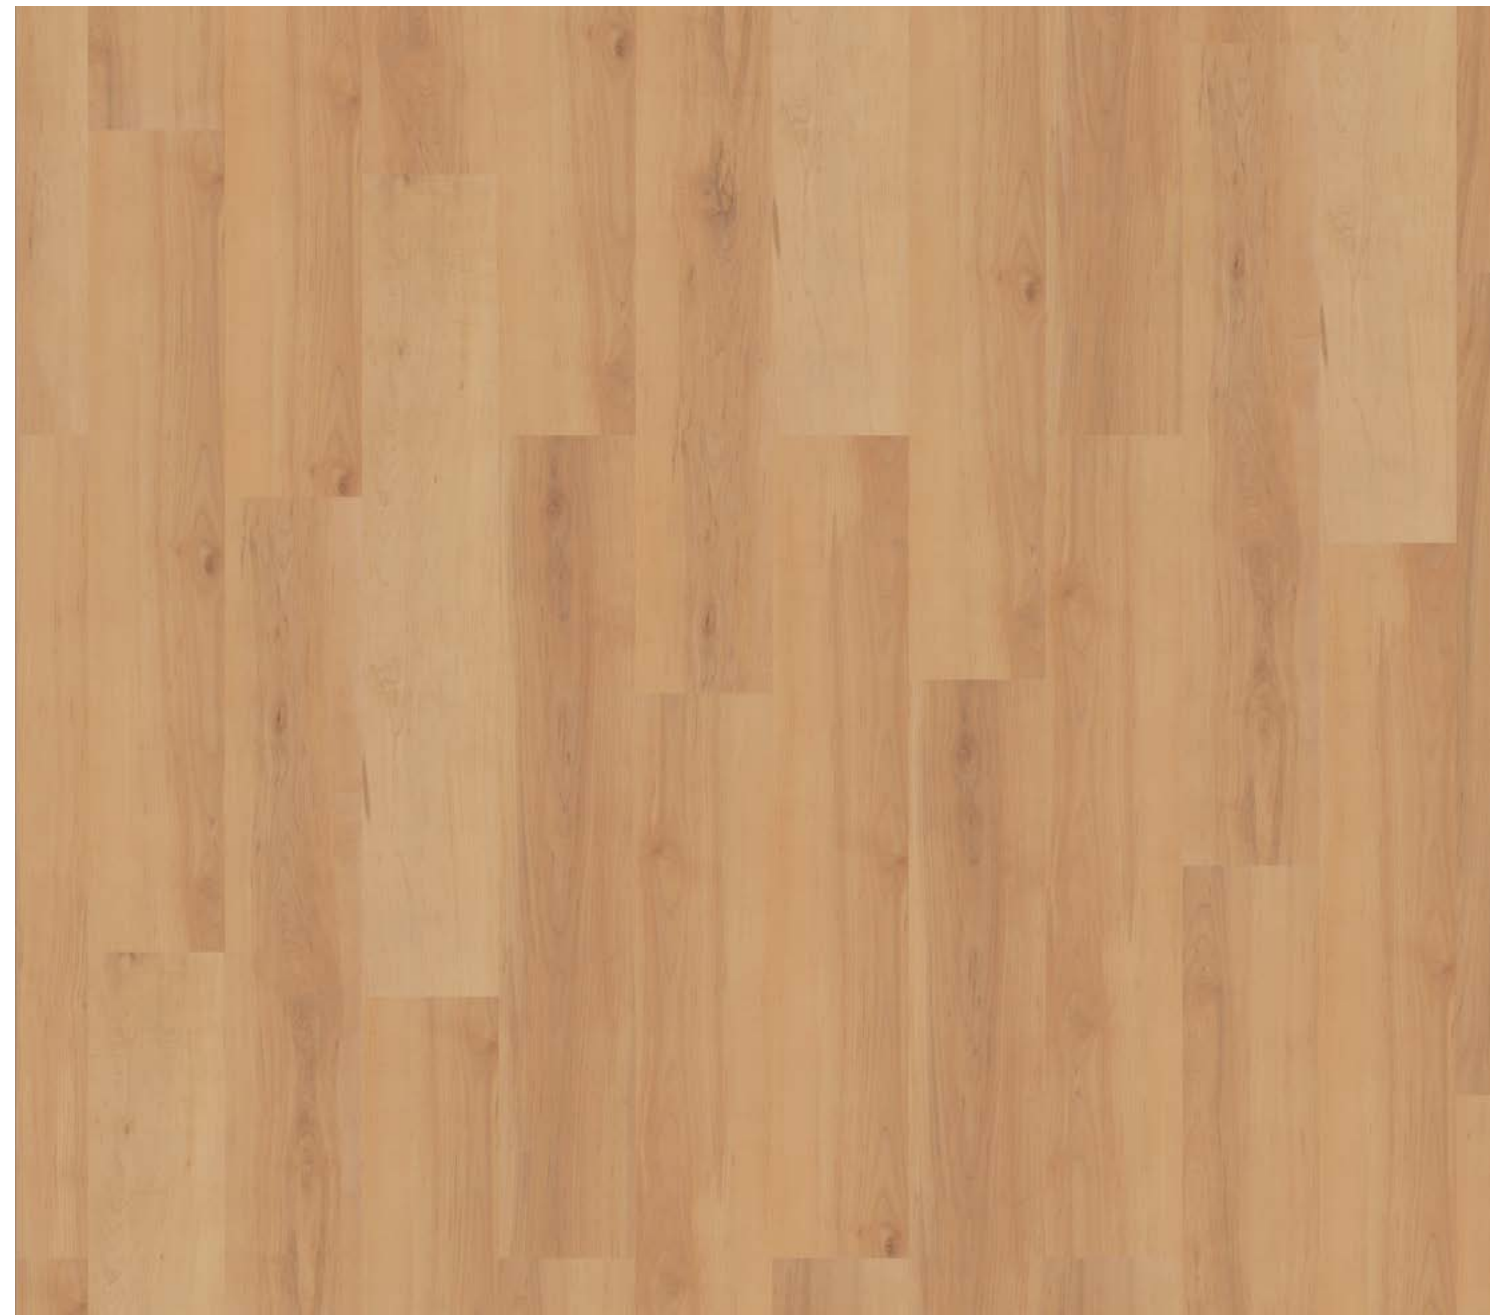

DELICATE OAK

Classic pattern which is as timeless as the colour range, fitting every demand and lifestyle. The natural surface structure provides a natural feel and touch and is adding serenity to every interior.

Dimensions:
1219 x 229 mm



Delicate Oak Light Brown 080



Delicate Oak Beige 081



Delicate Oak Brown 082



Delicate Light Beige 083



Delicate Oak Beige 081

DELICATE OAK LIGHT BROWN
iD Elegance 55 256030080
iD Elegance 55 Max 256109080

DELICATE OAK BEIGE
iD Elegance 55 256030081
iD Elegance 55 Max 256109081

DELICATE OAK BROWN
iD Elegance 55 256030082
iD Elegance 55 Max 256109082

DELICATE LIGHT BEIGE
iD Elegance 55 256030083
iD Elegance 55 Max 256109083

MODERN OAK

This flooring feels like a good friend: always there but never intrusive. The well-balanced design is coming in six coordinated colour shades to match every interior style. A perfect starting point to create exciting ambiances based on a timeless but contemporary design.

Dimensions:
1219 x 229 mm



Modern Oak White 084



Modern Oak Light Beige 085



Modern Oak Beige 086



Modern Oak Light Brown 087



Modern Oak Brown 088



Modern Oak Natural 089



MODERN OAK WHITE
iD Elegance 55 256030084
iD Elegance 55 Max 256109084

MODERN OAK LIGHT BEIGE
iD Elegance 55 256030085
iD Elegance 55 Max 256109085

MODERN OAK BEIGE
iD Elegance 55 256030086
iD Elegance 55 Max 256109086

MODERN OAK LIGHT BROWN
iD Elegance 55 256030087
iD Elegance 55 Max 256109087

MODERN OAK BROWN

iD Elegance 55 256030088

iD Elegance 55 Max 256109088

MODERN OAK NATURAL

iD Elegance 55 256030089

iD Elegance 55 Max 256109089

PRIMARY PINE

Primary pine is a popular softwood and known for its color with straight grain, a good choice for rustic and country decor.

Dimensions:
1219 x 229 mm



Primary Pine Natural 034



Primary Pine White 035



Primary Pine White 035

PRIMARY PINE NATURAL
iD Elegance 55 256030034
iD Elegance 55 Max 256109034

PRIMARY PINE WHITE
iD Elegance 55 256030035
iD Elegance 55 Max 256109035

SMOKED OAK

Smoked Oak is an authentic wood with cracks and saw effects. Its look will add personality to any room in your house.

Dimensions:
1219 x 229 mm



Smoked Oak Black 016



Smoked Oak Brown 017



Smoked Oak Natural 020



Smoked Oak Light Grey 019



Smoked Oak White 015



Smoked Oak Light Grey 019

A close-up image of a wood surface with a dark, almost black, smoky finish. The wood grain is visible but muted by the dark color.

SMOKED OAK BLACK
iD Elegance 55 256030016
iD Elegance 55 Max 256109016

A close-up image of a wood surface with a natural, medium-brown finish. The wood grain is clearly visible, showing various patterns and textures.

SMOKED OAK NATURAL
iD Elegance 55 256030020
iD Elegance 55 Max 256109020

A close-up image of a wood surface with a dark brown, smoky finish. The wood grain is visible, showing a mix of dark and lighter brown tones.

SMOKED OAK BROWN
iD Elegance 55 256030017
iD Elegance 55 Max 256109017

SMOKED OAK LIGHT GREY
iD Elegance 55 256030019
iD Elegance 55 Max 256109019



SMOKED OAK WHITE
iD Elegance 55 256030015
iD Elegance 55 Max 256109015



SOFT OAK

Soft Oak is a very elegant and appealing wood design inspired by the distinctive knots, grain and texture of oak for a beautiful organic feel.

Dimensions:
1219 x 229 mm



Soft Oak Light Grey 028

Soft Oak Brown 026



Soft Oak Natural 029



Soft Oak Beige 025



Soft Oak Light Grey 028



Soft Oak White 030



Soft Oak light Brown 027




Soft Oak Light Beige 024




A close-up image of a wood surface with a dark brown, rich, and slightly mottled texture. The grain is vertical, and there are some darker, irregular patches and knots visible throughout the material.


SOFT OAK BROWN
iD Elegance 55 256030026
iD Elegance 55 Max 256109026

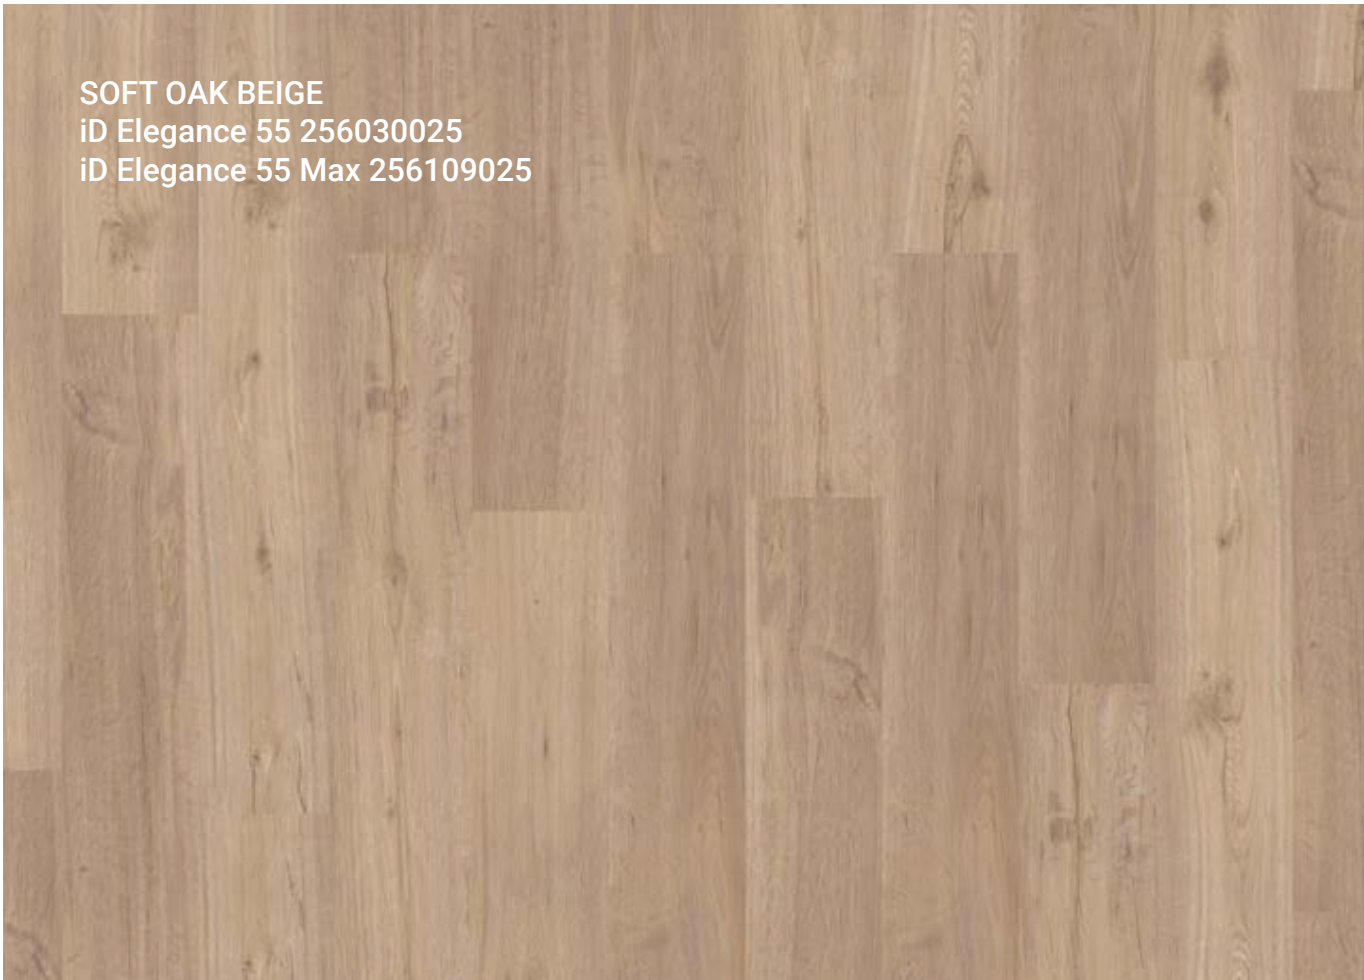A close-up image of a wood surface with a light beige or cream-colored tone. The grain is vertical, and there are some darker, irregular patches and knots visible throughout the material.

SOFT OAK BEIGE
iD Elegance 55 256030025
iD Elegance 55 Max 256109025

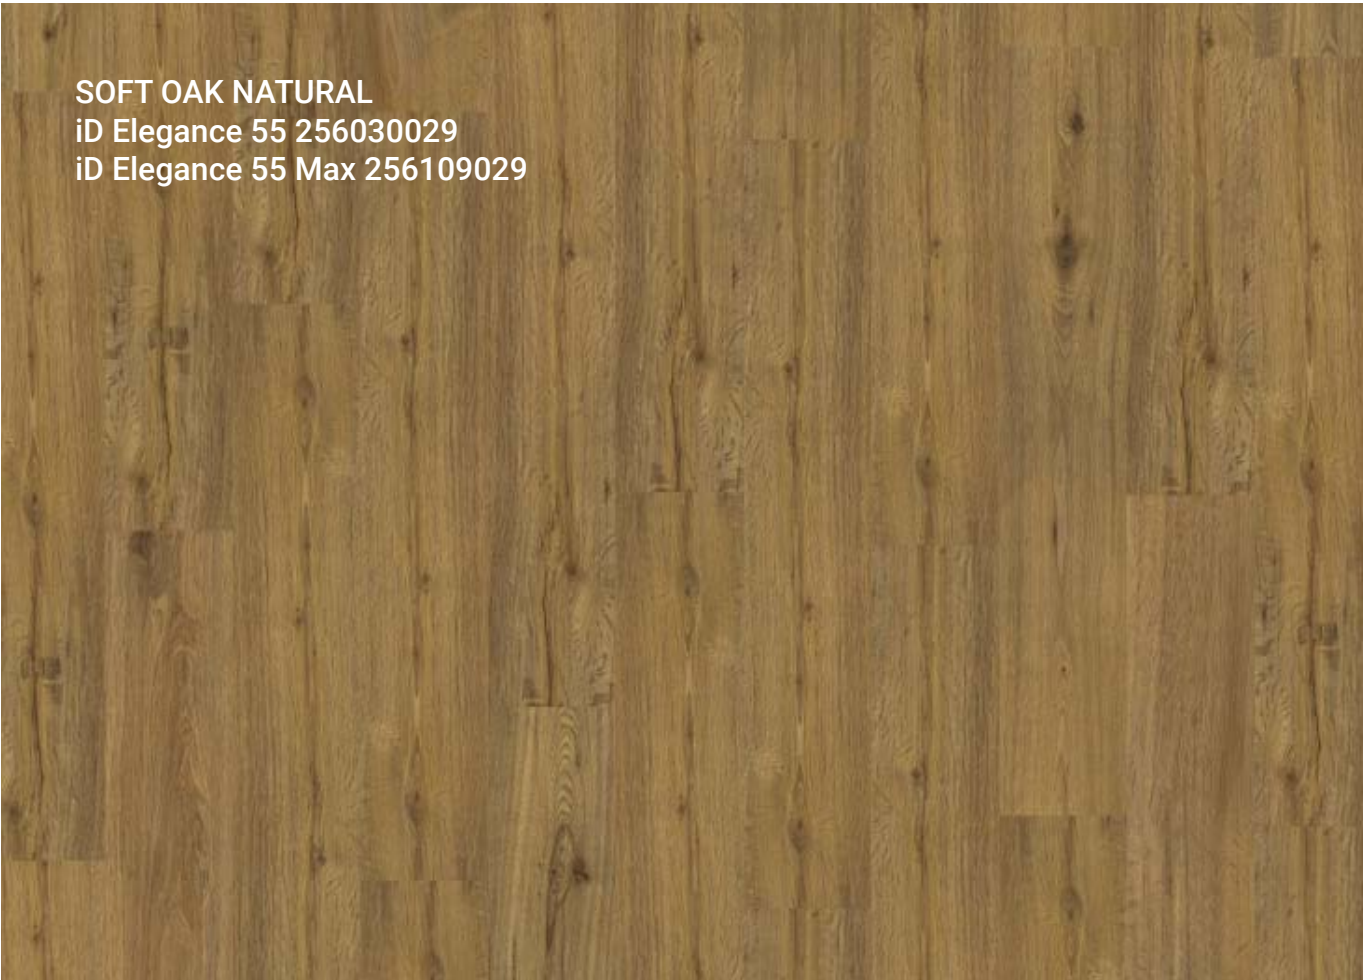A close-up image of a wood surface with a warm, golden-brown or honey-colored tone. The grain is vertical, and there are some darker, irregular patches and knots visible throughout the material.

SOFT OAK NATURAL
iD Elegance 55 256030029
iD Elegance 55 Max 256109029

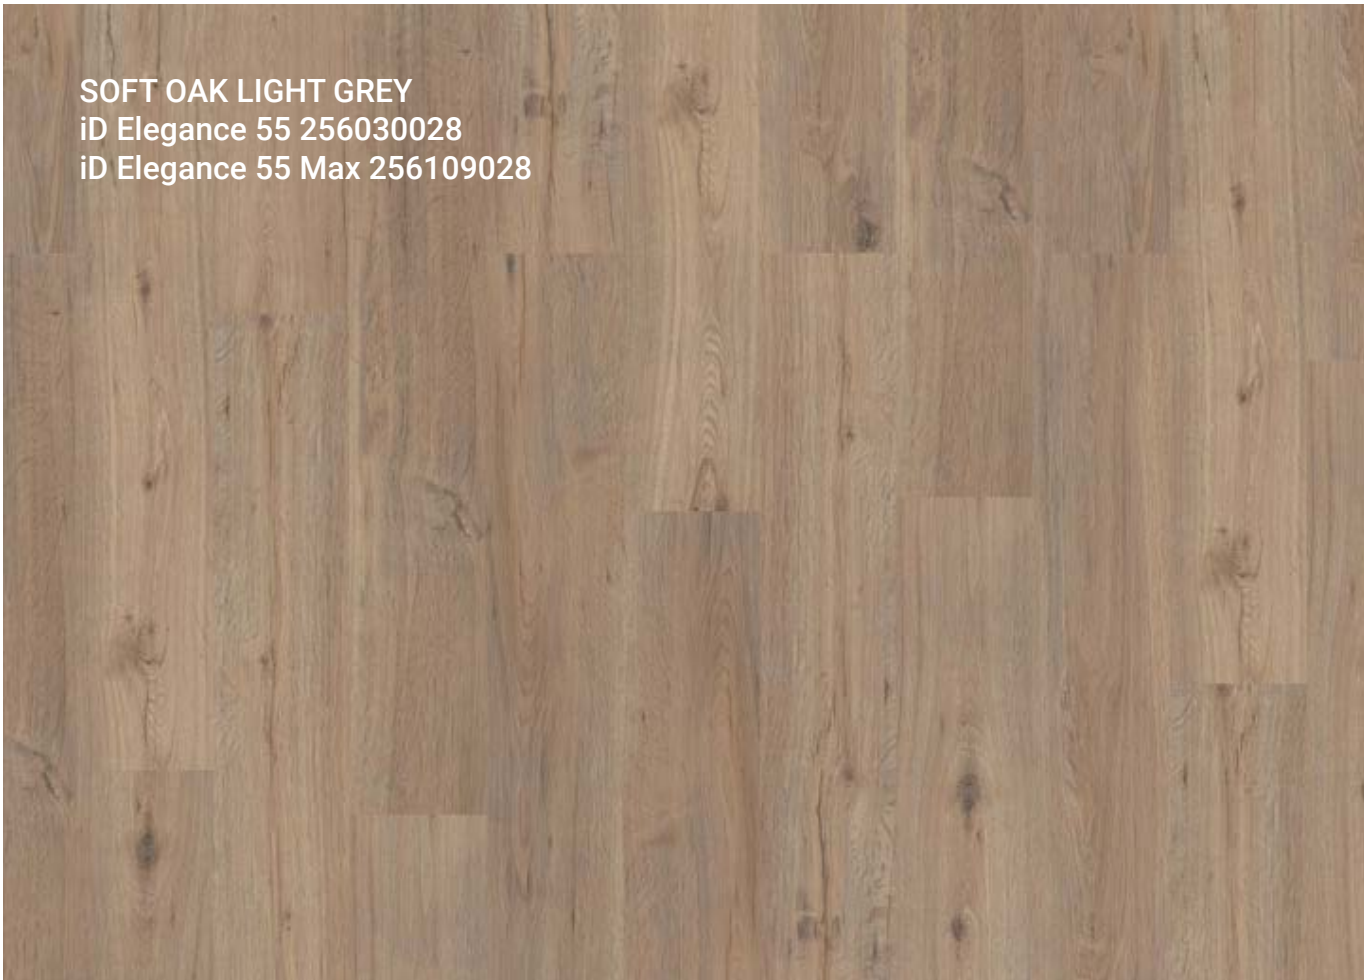A close-up image of a wood surface with a light grey or taupe tone. The grain is vertical, and there are some darker, irregular patches and knots visible throughout the material.

SOFT OAK LIGHT GREY
iD Elegance 55 256030028
iD Elegance 55 Max 256109028

SOFT OAK WHITE
iD Elegance 55 256030030
iD Elegance 55 Max 256109030

SOFT OAK LIGHT BROWN
iD Elegance 55 256030027
iD Elegance 55 Max 256109027

SOFT OAK LIGHT BEIGE
iD Elegance 55 256030024
iD Elegance 55 Max 256109024




TEAK

The Teak adds a warm and exotic touch.

Teak Natural
iD Elegance 55 256030039
iD Elegance 55 Max 256109039

Dimensions:
1219 x 229 mm

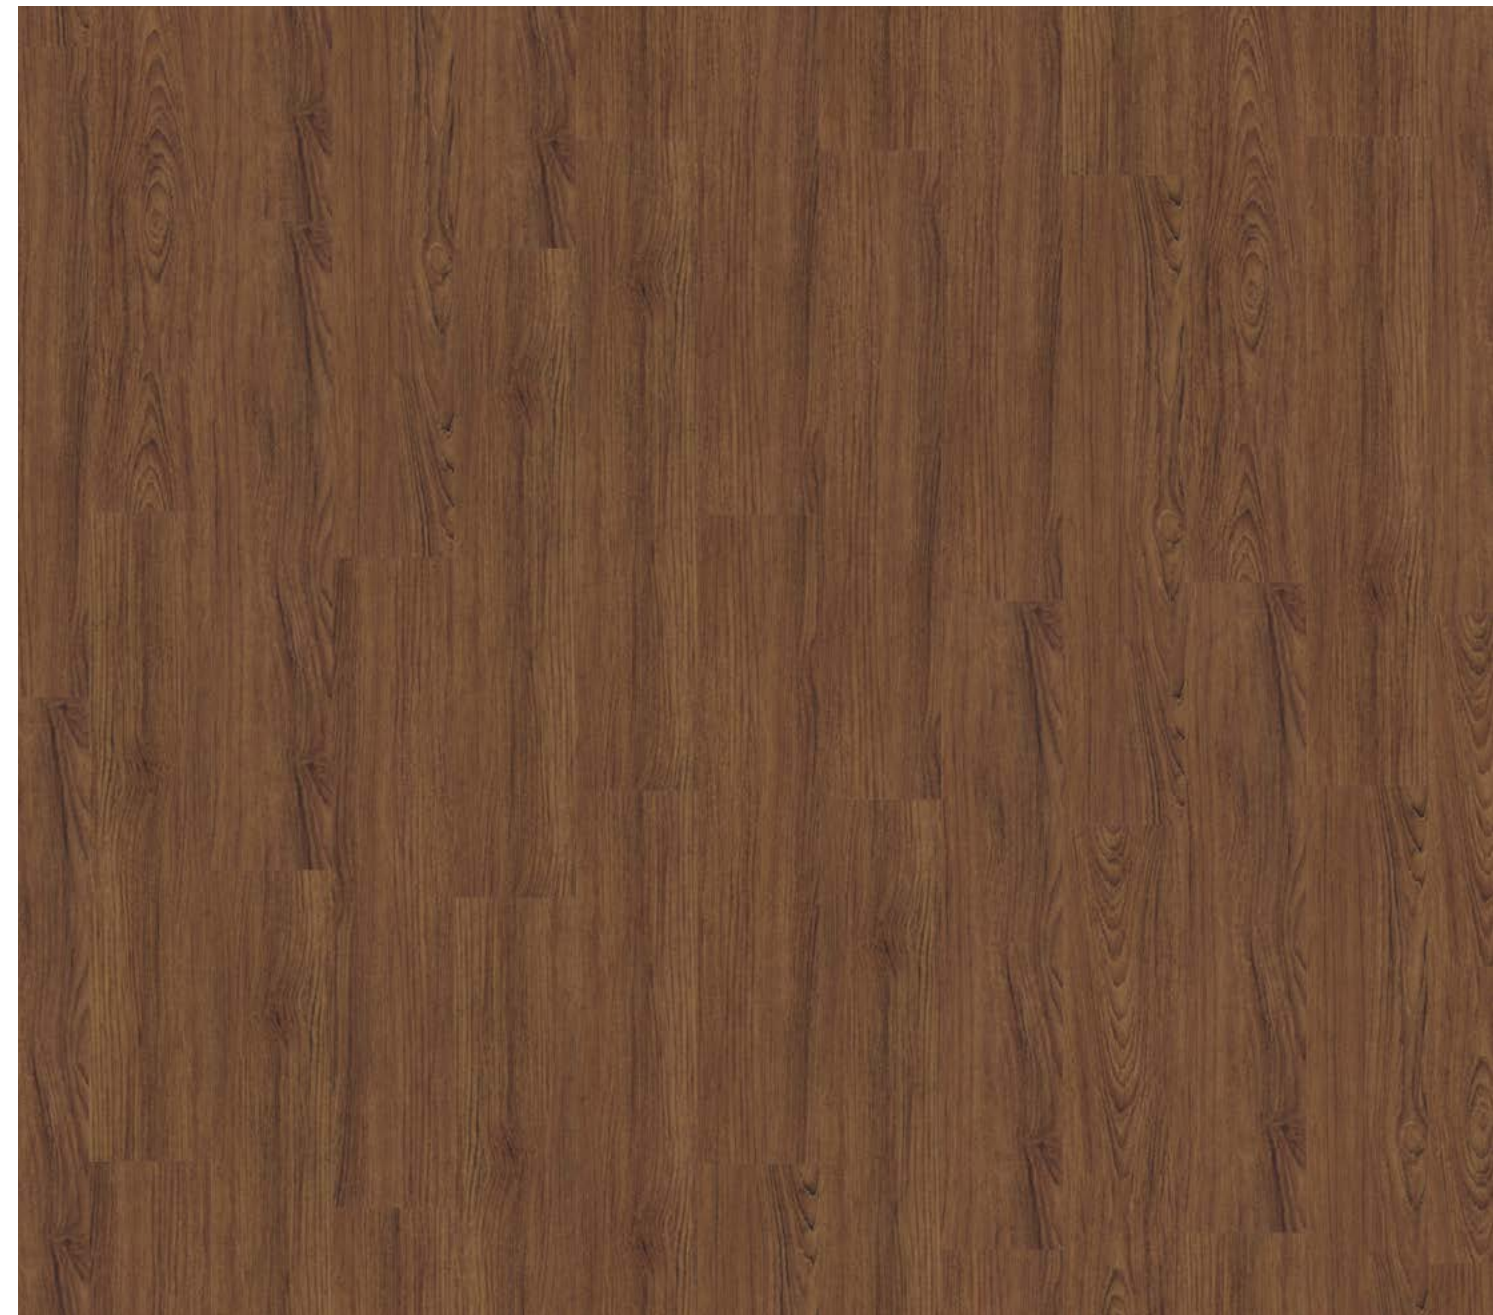

VERSAILLES OAK

The distinctive and elegance design adds a classic touch to any spaces, making it suitable for both traditional and contemporary interiors.

Dimensions:
457 X 457 mm



Versailles Oak Light Brown 011



Versailles Oak Dark Brown 012



Versailles Oak Light Brown 011

VERSAILLES OAK LIGHT BROWN
iD Elegance 55 256093011
iD Elegance 55 Max 256110011



VERSAILLES OAK DARK BROWN
iD Elegance 55 256093012
iD Elegance 55 Max 256110012






WALNUT

The classic wood pattern gives rich, deep tones and striking grain patterns.

Walnut Light Brown
iD Elegance 55 256030036
iD Elegance 55 Max 256109036

Dimensions:
1219 x 229 mm

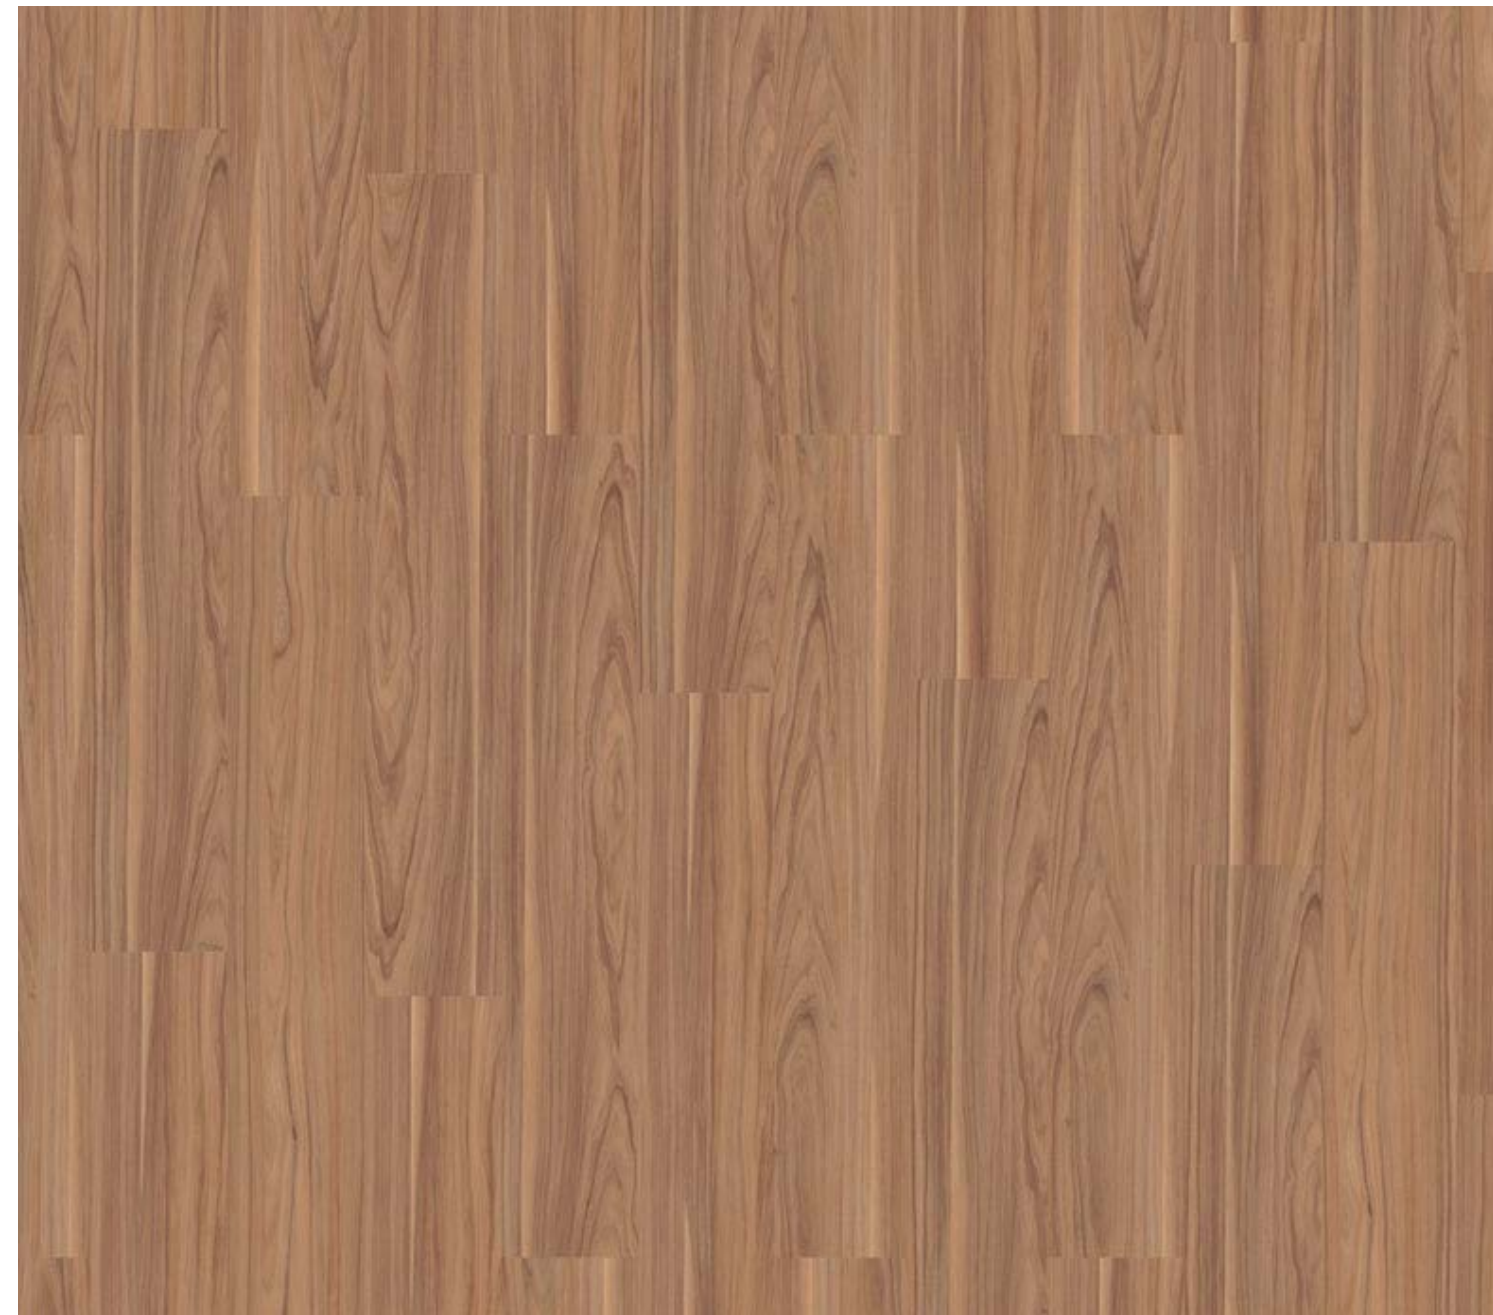

BRECCIA

This timeless classic in cold grey and black colours transforms a centuriesold style of flooring into contemporary design.


Dimensions:
610 X 305 mm



Breccia Light Grey 021



Breccia Black 022

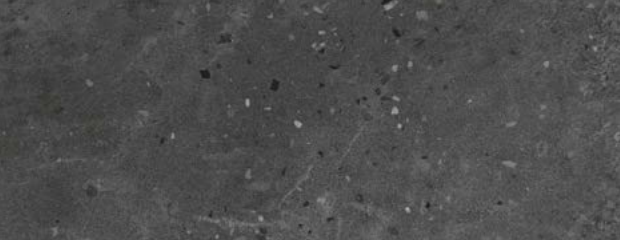

Breccia Light Grey 021

BRECCIA LIGHT GREY
iD Elegance 55 256031021
iD Elegance 55 Max 256111021



BRECCIA BLACK
iD Elegance 55 256031022
iD Elegance 55 Max 256111022




CEMENT

Cement has a polished-concrete design with subtle patterns in a warm black colour. The cement design gives to the tile a nice finishing and industrial touch.

Dimensions:
610 X 305 mm



Cement Grey 010

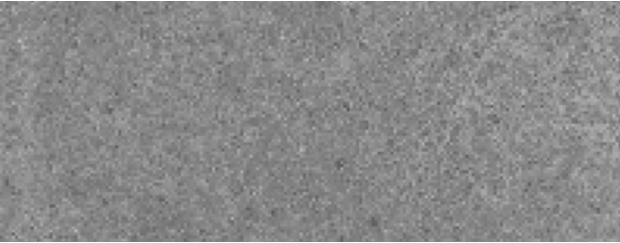

Cement Medium Dark 011



Cement Grey 010

CEMENT GREY
iD Elegance 55 256031010
iD Elegance 55 Max 256111010

CEMENT MEDIUM DARK
iD Elegance 55 256031011
iD Elegance 55 Max 256111011



MARBLE

The most classic marble in an allover designs.

Marble Classic
iD Elegance 55 256031020
iD Elegance 55 Max 256111020

Dimensions:
610 X 305 mm



ORIGINAL SLATE

Designed to mimic a real slate floor, Original Slate adds a modern industrial look with a beautiful finish. It blends well with wooden furniture, offering unique and unconventional ambiances.

Dimensions:
610 X 305 mm



Original Slate Black 003



Original Slate Grey 004



Original Slate Grey 004

ORIGINAL SLATE BLACK
iD Elegance 55 256031003
iD Elegance 55 Max 256111003

ORIGINAL SLATE GREY
iD Elegance 55 256031004
iD Elegance 55 Max 256111004



STANDSTONE

The Sandstone is an authentic and natural stone. It creates a traditional ambiance in your interior

Sandstone Black
iD Elegance 55 256031006
iD Elegance 55 Max 256111006

Dimensions:
610 X 305 mm





STONEART

This design based on a concrete background is using the same overprint pattern.

Stoneart Medium Grey
iD Elegance 55 256031023
iD Elegance 55 Max 256111023

Dimensions:
610 X 305 mm






TERRAZZO

Classic Terrazzo pattern by giving a natural, organic look.

Terrazzo Classic
iD Elegance 55 256031024
iD Elegance 55 Max 256111024

Dimensions:
610 X 305 mm

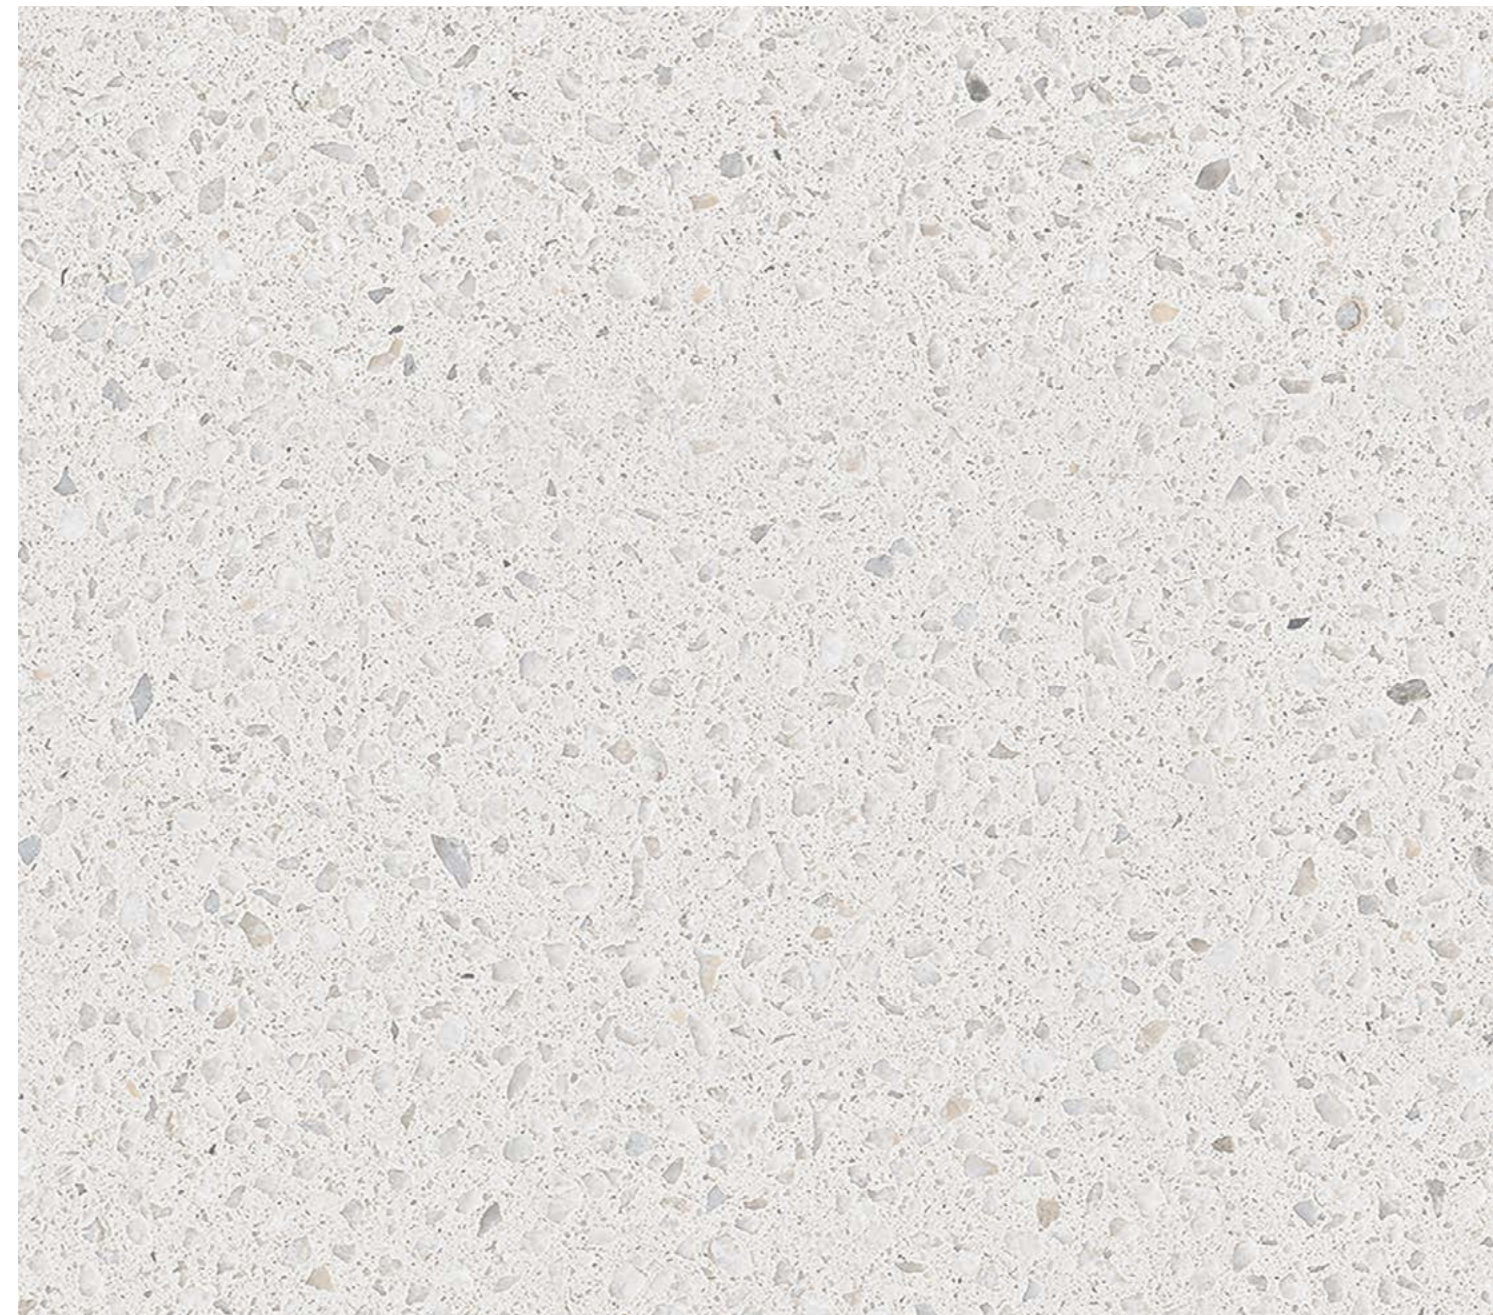

VENEZIA

Venezia is a design inspired by overcast concrete. This timeless classic in cold grey colours transforms a centuries-old style of flooring into contemporary design.

Dimensions:
610 X 305 mm



Venezia Grey002



Venezia Beige001



Venezia Grey 002

ENEZIA GREY
iD Elegance 55 256031002
iD Elegance 55 Max 256111002

ENEZIA BEIGE
iD Essential 30 256031001
iD Essential MAX 30 256111001

ABSTRACT

Abstract catches the hues of irregular shapes, transforming an area into a dynamic atmosphere. The pattern presents an intricate study of light vs dark, tone-on-tone colours.


Dimensions:
610 X 305 mm




Abstract Dark Grey 013



Abstract Light Grey 014

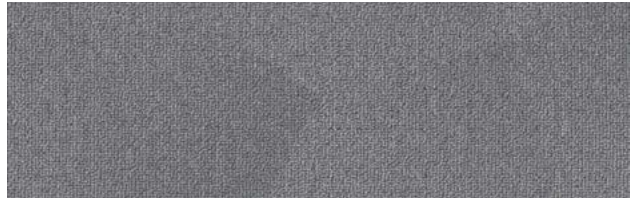

Abstract Steel Blue 015

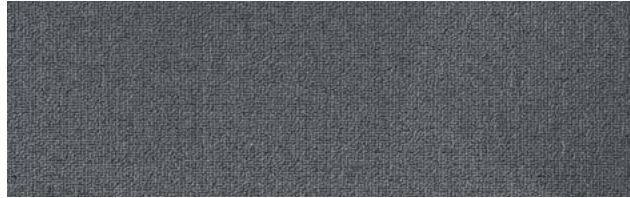

ABSTRACT DARK GREY
iD Elegance 55 256093013
iD Elegance 55 Max 256110013

ABSTRACT LIGHT GREY
iD Elegance 55 256093014
iD Elegance 55 Max 256110014

ABSTRACT STEEL BLUE
iD Elegance 55 256093015
iD Elegance 55 Max 256110015

LINEART

LineArt is impacting dramatic elegance and freshness to interior spaces. Its deliberate multi-colour stripe allows designers to tie-in colour accents from seating, walls and accessories, the interior design and furnishings together.

Dimensions:
610 X 305 mm



LineArt Light Blue 019



LineArt Sand 020



LineArt Light Blue 019

LINEART LIGHT BLUE
iD Elegance 55 256093019
iD Elegance 55 Max 256110019

LINEART SAND
iD Elegance 55 256093020
iD Elegance 55 Max 256110020


LINEFLOW

Classic linear design with mass appealing, to bring a simple and calm ambiance.

Dimensions:
610 X 305 mm



Lineflow Light Grey 016

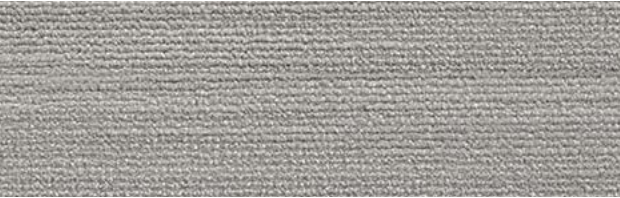

Lineflow Medium Grey 017



Lineflow Blue 018





LINEFLOW LIGHT GREY
iD Elegance 55 256093016
iD Elegance 55 Max 256110016



LINEFLOW MEDIUM GREY
iD Elegance 55 256093017
iD Elegance 55 Max 256110017



LINEFLOW BLUE
iD Elegance 55 256093018
iD Elegance 55 Max 256110018

LINEN

A pattern inspired by fabric, available in 6 vivid tones of colours.

Dimensions:
1219 x 229 mm



Linen Dark Blue 042



Linen Green 048



Linen Middle Blue 041



Linen Orange 051



Linen Red 046



Linen Brown 043



LINEN DARK BLUE
iD Elegance 55 256030042
iD Elegance 55 Max 256109042

LINEN GREEN
iD Elegance 55 256030048
iD Elegance 55 Max 256109048

LINEN MIDDLE BLUE
iD Elegance 55 256030041
iD Elegance 55 Max 256109041

LINEN ORANGE

iD Elegance 55 256030051

iD Elegance 55 Max 256109051

LINEN RED

iD Elegance 55 256030046

iD Elegance 55 Max 256109046

LINEN BROWN

iD Elegance 55 256030043

iD Elegance 55 Max 256109043

TISSE

A linear pattern, available in 5 soft and pale pastel colours.

Dimensions:
1219 x 229 mm



Tisse Pale Blue 049



Tisse Pale Green 050



Tisse Pale Orange 053



Tisse Pale Yellow 044



Tisse Yellow 052



TISSE PALE BLUE
iD Elegance 55 256030049
iD Elegance 55 Max 256109049

TISSE PALE GREEN
iD Elegance 55 256030050
iD Elegance 55 Max 256109050

TISSE PALE ORANGE
iD Elegance 55 256030053
iD Elegance 55 Max 256109053

TISSE PALE YELLOW

iD Elegance 55 256030044

iD Elegance 55 Max 256109044

TISSE YELLOW

iD Elegance 55 256030052

iD Elegance 55 Max 256109052

Installation Instructions

IMPORTANT :

- Make sure all specifications and instructions are followed carefully.
- Contact your Tarkett representative if you are unsure about any part of the installation.
- This information is subject to change due to continuous improvement.
- Use the same shade number for each continuous surface.
- Store the boxes in small neat piles (max. 5 boxes high).
- Let the flooring acclimatise at least 24h before laying at room temperature (minimum 15°C).
- The subfloor must be flat, level, clean, without marks (no felt pen, marker, etc.), sound, dry, solid, smooth and not exposed to moisture. Absorbency must be checked and adjusted to have moderately absorbent subfloor.
- Only use adhesives recommended by Tarkett and developed for LVT installation. Always follow the adhesive manufacturer's instructions and recommendations

SUBFLOOR

The subfloor must be level, flat, clean, free from marks (no felt pen, marker of any type, ballpoint pens, paint, etc., that could cause discoloration due to migration), sound, dry, solid, hard, smooth (absorbency must be checked) and not exposed to moisture. The preparation / dryness of the subfloor and installation procedures should be in accordance with the current relevant standard within the country of use. The dryness of a solid subfloor should be below the maximum moisture level permitted when tested in accordance with that standard.

E.g. in the UK, the relative humidity of concrete surfaces must be below 75%, and less than 2% with the CCM method. In North America, ASTM F-170 recommends a water-to-cement ratio of 0.40 to 0.45.

Before selecting a smoothing compound, check what type of traffic the floorcovering will be subjected to once installed. Latex smoothing compounds are not suitable for areas that will receive heavy traffic, especially heavy, narrow wheeled traffic (see EN 12529, castors and wheels). Check levelling compound compatibility, and follow the instructions of the levelling compound manufacturer. Note: exclusion of liability (adhesives, levelling compounds, etc.)

Although Tarkett may list a selection of adhesive, levelling compound and surface damp-proof membrane manufacturers and types, we do not guarantee the products listed. You can access our list of recommended adhesive here. The list of products and manufacturers is not guaranteed complete or current.

If any doubts or clarifications should be needed, please contact your local Tarkett representative for further information.

Tarkett will accept no liability for any of these products failing to perform in conjunction with any of their products. It is the responsibility of the adhesive manufacturer and flooring contractor to ensure the products being used are appropriate for use and applied in accordance with the manufacturer recommendations.

CONDITIONS REQUIRED FOR INSTALLATION

It is important to store the planks at least 24 hours before installation at a minimum room temperature of 15°C (see each country regulations). This temperature should be maintained throughout the installation. The minimum temperature of the subfloor should be 10-12°C and room temperature 15°C (see each country regulations). The recommended relative humidity inside the room should be 35-65% (see each country regulations). Planks should be stored flat in their packages, in small neat piles (max. 5 boxes high).

UNDERFLOOR HEATING

It is imperative that underfloor heating systems have been previously commissioned and found to be functioning correctly before installation of the floorcovering.

Ensure that the underfloor heating system is switched off 48 hours before installation of the floorcovering commences, and remains off for at least 48h after installation is completed. While the underfloor heating system is off, an alternative heating source should be provided, if required, to ensure that the installation area is kept at a constant temperature of 18-27°C.

Gradually increase the temperature over a number of days by only a few degrees per day until the desired room temperature is reached.

The temperature should never exceed the floorcovering industry's agreed maximum of 27°C on the underside of the floorcovering (the adhesive line).

LAYING DIRECTION

Before starting to install tiles / planks, determine the type of laying taking into account the shape of the room and the design to be laid.

IMPORTANT! Before laying the first rows of tiles, check that:

- The cut tiles closest to the walls are more than 10cm wide

- At doorways and corners, the cut tiles are not less than half of a whole tile.

Tiles

Tiles are marked on the reverse with arrows. Tiles should be laid in a checkerboard pattern. Installation should start from the centre of the room and finish on the sides (walls).



Planks

Stagger each row of planks to ensure that the end joints do not coincide with the previous room installed. For wooden pattern, avoid to install planks with the same design next to each other.

GLUING

Glue with an acrylic adhesive emulsion recommended by Tarkett. Apply about 250 g/m² using the recommended trowel (A1 according TKB norm). Always follow the adhesive manufacturer's instructions and respect the adhesive drying and working time. In case of particular conditions, i.e. significant temperature variation (veranda, winter garden...) or heavy traffic, bi-component adhesive could be required. Place the tiles or planks tight edge to edge.

After selected area installation, press manually the tiles or planks using a piece of board with a rounded edge. After manual pressing, use a heavy roller in both directions to ensure final bonding.

AFTER INSTALLATION

IMPORTANT! Wait 48 to 72 hours before allowing any foot traffic or moving in furniture.

Protection of installation

If building work is carried out after installation, the floor should always be protected by covering it with hardboard or plywood sheeting. Masking tape must not be stuck directly on the floor. Never subject a newly installed floorcovering to heavy wheeled traffic at an early stage, as this will force adhesive from beneath the floorcovering.

Initial site clan

An initial site clean is always recommended before the new floorcovering is commissioned. Residual adhesive should be removed with methylated spirits and a clean cloth. Lightly soiled floors: vacuum, sweep or damp mop the area to remove loose dirt and building dust. A combined machine is very effective for large areas (combined scrubber / dryer with cylindrical brushes for safety flooring).

Modern day-room cleaning aims to reduce wet cleaning procedures and replace them with drier cleaning techniques. For example, the use of centrally laundered pre-impregnated mops and the wide application of appropriate machines. This makes work more effective and easier for the cleaning staff, and minimizes environmental impact. Less cleaning chemicals and less fresh water are used.

GENERAL ADVICE

- Clean the floorcovering regularly as this is more cost effective and hygienic than occasional heavy duty cleaning.
- Always follow dosage instructions carefully.
- Wipe up any grease and spilt oil immediately, as it may damage the surface.
- Resilient floors are damaged by solvents.
- Black rubber wheels and rubber feet can discolour the floorcovering. All chair and table legs should have good quality feet. Felt feet are not recommended in commercial interiors. Hard plastic is preferred.
- Remember that light colours need more frequent cleaning.

PREVENTIVE CARE

Entrance matting
About 80% of surface soiling that has to be cleaned off is brought from outside. And 90% of that soiling can be avoided by an effective and correctly dimensioned entrance mat. The less dirt that comes in through the entrance, the lower the maintenance requirements.

DAILY AND REGULAR CLEANING

**Dry mopping**
Remove dust and dirt with dry mop.

OR

**Vacuum cleaning**
To remove dust and loose dirt. Recommended for large areas and initial site cleaning.

**Damp mopping**
Use a mop dampened with water or detergent solution. It is essential that water does not stay on the floor or leave a film. The floor should be virtually dry after 15-20 seconds.

OR

**Combined machine with brush**
Industrial machine-cleaning (large areas). Use diluted neutral detergent. Adjustable speed 300-500rpm. Use nylon brush not white/beige pad !

**Manual brush**
Brush (with medium brushes).

OR

**Rotowash with brushes**
Spray diluted detergent and clean with water or water+detergent.

**Spot and stain removal**
Treat stains immediately. Hand spot using a white/red nylon pad with neutral detergent (solvents should not be used). Work from the outside of the mark towards its centre. Rinse and wipe afterwards with clean water.

Cleaning & maintenance instructions



TopCleanXP surface Treatment

The TopClean surface treatment is a PUR reinforcement that offers good cleaning and maintenance properties, at a low initial cost.

TopCleanXP surface Treatment

Always protect the floor with thick paper or hardboard sheeting during the construction period.

After installation, always clean the new floor: vacuum, sweep or damp mop the area to remove building dust and loose dirt.

If any doubts or clarifications should be needed, please contact your local Tarkett representative for further information.

iD Elegance 55
iD Elegance 55 Max
LUXURY VINYL TILES

TECHNICAL DATA	STANDARD	iD ELEGANCE 55	iD ELEGANCE MAX 55
CLASSIFICATION			
Classification	EN ISO 10582	Heterogeneous PVC floor covering	
	EN ISO 10874	Domestic: 23 - Commercial: 33	
Wear layer binder content	EN ISO 10582	Type I	
TECHNICAL CHARACTERISTICS			
Total thickness	EN ISO 24346	2.50 mm	3.00 mm
Total weight	EN ISO 23997	4360 g/m²	5500 g/m²
Wear layer thickness	EN ISO 24340	0.55 mm	
Bevelled edges		No	
Surface treatment (PUR)		Yes - TopClean	
Form of delivery	EN ISO 24342		
	Planks 229 x 1219 mm	10 planks/box = 2.79m²	8 planks/box = 2.23m²
		72 boxes/pallet = 200.88m²	72 boxes/pallet = 160.56m²
	Tiles 610x 305 mm	14 tiles/box = 2.60m²	12 tiles/box = 2.23m²
		64 boxes/pallet = 166.40m²	64 boxes/pallet = 142.72m²
	Tiles 457x 457 mm	10 tiles/box = 2.09m²	8 tiles/box = 1.67m²
80 boxes/pallet = 167.20m²		80 boxes/pallet = 133.76m²	

PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)		
Reaction to fire	EN 13501-1	Bfl-s1 glued over A2fl or A1fl substrate (concrete)
Electrostatic properties	EN 1815	≤ 2.0 kV on concrete
	EN 1081	R1 > 10 ¹⁰ Ω
Thermal resistance	EN ISO 10456	0.03 m² K/W
Slip resistance	EN 13893	μ ≥ 0.3
TECHNICAL PERFORMANCES		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm
		Average measured value: 0.03 mm
Impact sound reduction	NF EN ISO 717 / 2	ΔLw 4 dB
Slip resistance	DIN 51130	R9
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Light fastness	EN ISO 105-B02	≥ 6
Dimensional stability	EN ISO 23999	≤ 0.25%
Chemical resistance	EN ISO 26987	Good resistance
Underfloor heating		Suitable – max. 27°C

ENVIRONMENTAL PERFORMANCES		
Total VOC emissions	ISO 16000-9	≤ 100 µg/m³ (after 28 days)
COLOURS		
Wood:37 / Stone:12 / Texture:19		

The above information is subject to modification for the benefit of further improvement (04/2025). For the latest information, please visit our website: www.Tarkett-Asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



DESIGN	COLOR	FORMAT	ID ELEGANCE 55(2.5MM)	ID ELEGANCE MAX 55(3MM)
Cerused Oak (EIR)	Beige	1219 x 229 mm	256114001	256113001
Charm Oak (EIR)	Beige	1219 x 229 mm	256114009	256113009
Country Oak (EIR)	Beige	1219 x 229 mm	256114004	256113004
	Grey	1219 x 229 mm	256114007	256113007
	Natural	1219 x 229 mm	256114008	256113008
Aspen Oak	Beige	1219 x 229 mm	256030021	256109021
	Grey	1219 x 229 mm	256030022	256109022
	Natural	1219 x 229 mm	256030023	256109023
Beech	Natural	1219 x 229 mm	256030038	256109038
Delicate Oak	Beige	1219 x 229 mm	256030081	256109081
	Brown	1219 x 229 mm	256030082	256109082
	Light Beige	1219 x 229 mm	256030083	256109083
	Light Brown	1219 x 229 mm	256030080	256109080
Modern Oak	Beige	1219 x 229 mm	256030086	256109086
	Brown	1219 x 229 mm	256030088	256109088
	Light Beige	1219 x 229 mm	256030085	256109085
	Light Brown	1219 x 229 mm	256030087	256109087
	Natural	1219 x 229 mm	256030089	256109089
	White	1219 x 229 mm	256030084	256109084
Primary Pine	Natural	1219 x 229 mm	256030034	256109034
	White	1219 x 229 mm	256030035	256109035
Smoked Oak	Black	1219 x 229 mm	256030016	256109016
	Brown	1219 x 229 mm	256030017	256109017
	Light Grey	1219 x 229 mm	256030019	256109019
	Natural	1219 x 229 mm	256030020	256109020
	White	1219 x 229 mm	256030015	256109015
Soft Oak	Beige	1219 x 229 mm	256030025	256109025
	Brown	1219 x 229 mm	256030026	256109026
	Light Beige	1219 x 229 mm	256030024	256109024
	Light Brown	1219 x 229 mm	256030027	256109027
	Light Grey	1219 x 229 mm	256030028	256109028
	Natural	1219 x 229 mm	256030029	256109029
	White	1219 x 229 mm	256030030	256109030
Teak	Natural	1219 x 229 mm	256030039	256109039
Versailles Oak	Dark Brown	457 x 457 mm	256093012	256110012
	Light Brown	457 x 457 mm	256093011	256110011
Walnut	Light Brown	1219 x 229 mm	256030036	256109036
Breccia	Black	610 x 305 mm	256031022	256111022
	Light Grey	610 x 305 mm	256031021	256111021
Cement	Grey	610 x 305 mm	256031010	256111010
	Medium Dark	610 x 305 mm	256031011	256111011
Marble	Classic	610 x 305 mm	256031020	256111020
Original Slate	Black	610 x 305 mm	256031003	256111003
	Grey	610 x 305 mm	256031004	256111004
Sandstone	Black	610 x 305 mm	256031006	256111006
StoneArt	Medium Grey	610 x 305 mm	256031023	256111023
Terrazzo	Classic	610 x 305 mm	256031024	256111024
Venezia	Beige	610 x 305 mm	256031001	256111001
	Grey	610 x 305 mm	256031002	256111002
Abstract	Dark Grey	457 x 457 mm	256093013	256110013
	Light Grey	457 x 457 mm	256093014	256110014
	Steel Blue	457 x 457 mm	256093015	256110015
LineArt	Light Blue	457 x 457 mm	256093019	256110019
	Sand	457 x 457 mm	256093020	256110020
LineFlow	Blue	457 x 457 mm	256093018	256110018
	Light Grey	457 x 457 mm	256093016	256110016
	Medium Grey	457 x 457 mm	256093017	256110017
Linen	Brown	1219 x 229 mm	256030043	256109043
	Dark Blue	1219 x 229 mm	256030042	256109042
	Green	1219 x 229 mm	256030048	256109048
	Middle Blue	1219 x 229 mm	256030041	256109041
	Orange	1219 x 229 mm	256030051	256109051
	Red	1219 x 229 mm	256030046	256109046
	Pale Blue	1219 x 229 mm	256030049	256109049
Tisse	Pale Green	1219 x 229 mm	256030050	256109050
	Pale Orange	1219 x 229 mm	256030053	256109053
	Pale Yellow	1219 x 229 mm	256030044	256109044
	Yellow	1219 x 229 mm	256030052	256109052



www.tarkett-asia.com
Contact: saleshk@tarkett.com

