

iD Essential 30 iD Essential MAX 30

LUXURY VINYL TILES

The simple
solution for
light traffic
environments



With 68 colours, 3 formats, 9 finishes, iD Essential 30 series is the best value for money. Mix and match wood, stones, carpet and texture designs, play with colour shades. Resistant to scuffs, scratches and stains.

A SUSTAINABLE solution

Through our Tarkett Human-Conscious Design® approach, we develop flooring that helps people flourish in their every day without compromising on health and the environment. With 90% of time spent indoors, clear air matters. Our LVT collections showcase ultra low VOC emissions, less than 100µg / m³ TVOC after 28 days. Our LVT is also phthalate-free. It contributes to healthier spaces and helps you reach green building certifications like WELL and LEED.



Soft Oak Light Beige 015 / Linen Green 325 / Tisse Pale Green 331

GREAT Design Options

68 colour options and 9 different surface aspects.

Plank and tile dimensions that you can combine to compose your own flooring expressions.

Our designs are printed on high quality decorative layer that recreates the look and feel of wood, stone, cement and other textures so well that it could be mistaken for the actual material.

Wide range of CUSTOMISATION options from designs to formats with low minimum order quantity!

RECREATE The Realism

Thanks to a 100% matte finish, our product resembles to the original material.


3 patterns and 5 different colours are available with embossing in register. This technique is used to create a precise texture that enhances a wood design. The surface is carved to match the natural essence of the wood, but unlike real wood, the surface interior does not absorb water and dirt and can be easily cleaned.

DURABLE Resistance and EASY Cleaning

Hygienic surface treated with the Tarkett unique TopClean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance, reducing the need for water, energy and chemical detergents.

GLUE DOWN LUXURY VINYL TILE


THE SIMPLE & RESISTANT SOLUTION

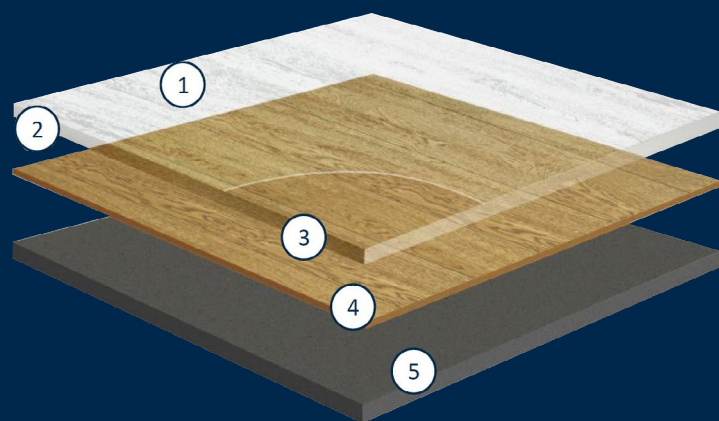


Formats

3 standard formats and 2 additional formats available on request.

Standard Formats

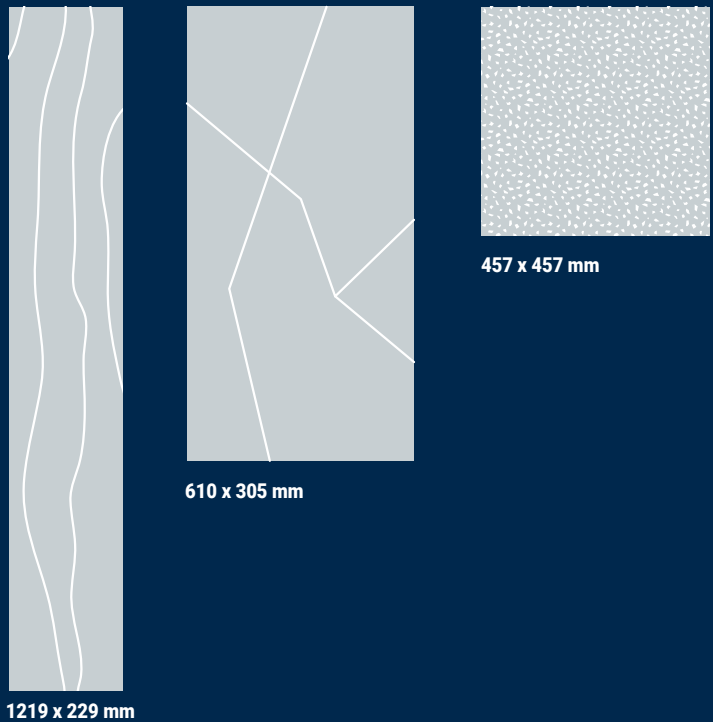

Formats available on request

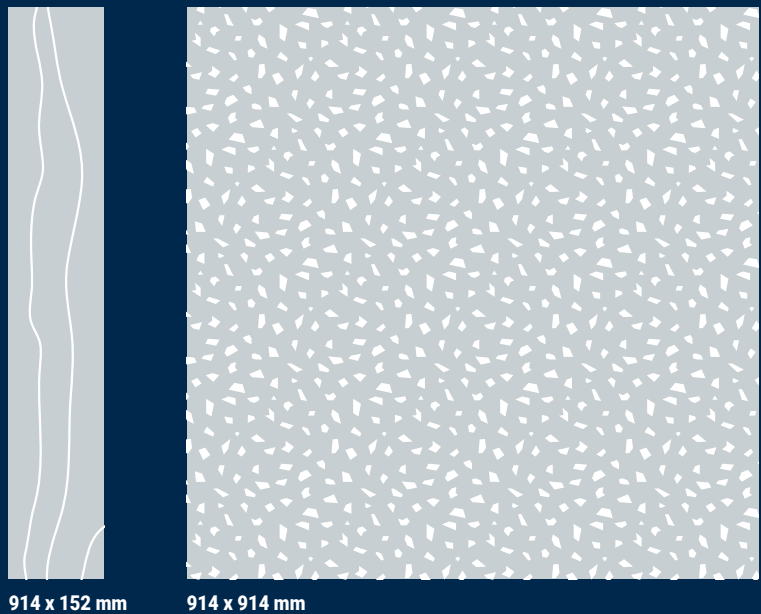

*Formats are specific per design.
Please contact Tarkett sales representative for customization possibility.

①

Surface embossing
textures close to real material

②

PUR treatment
for exceptional resistance to
abrasion and scratches

③

Wear layer
0.3mm transparent for traffic
resistance

④

High definition design
replicating the authenticity
of natural materials

⑤

Core Layer
made of PVC and Plasticizer for
easy glue down installation

Available in 2mm and 3mm
constructions

COUNTRY OAK



Beige EIR Natural EIR Grey EIR

CERUSED OAK
CHARM OAK



Beige EIR Beige EIR

ASPEN OAK



Grey Beige

BEECH
DELICATE OAK




Natural Natural Light Brown Beige




Brown Light Beige

BRECCIA




Light Grey



Black

CEMENT



Grey




Medium Dark

MARBLE



Classic

ORIGINAL SLATE



Black



Grey

MODERN OAK



White Light Beige Beige Light Brown Brown Natural

PRIMARY PINE



Natural White

SMOKED OAK



Black Brown Natural Light Grey




White

STANDSTONE



Black

STONEART




Medium Grey

TERRAZZO



Classic

VENEZIA



Grey



Beige

ABSTRACT



Dark Grey



Light Grey



Steel Blue

LINEART



Light blue



Sand

LINEFLOW



Light Grey



Medium Grey




Blue

SOFT OAK



Brown Natural Beige Light Grey White Light Brown Light Beige

TEAK



Natural

WALNUT
VERSAILLES OAK



Light Brown




Light Brown



Dark Brown

LINEN

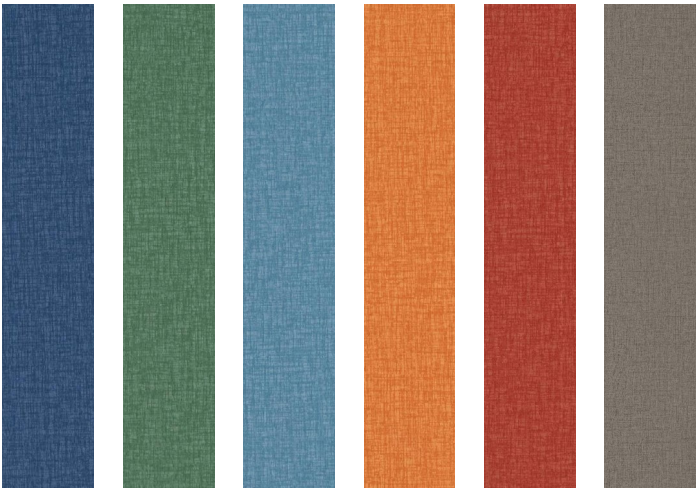

Dark Blue Green Middle Blue Orange Red Brown

TISSE



Pale Blue Pale Green Pale Orange Pale Yellow Yellow

COUNTRY OAK

The Country Oak, with its registered embossing, is a traditional and classic wood. Its timeless elegance is reassuring.

Dimensions:
1219 x 229 mm



Country Oak Beige EIR 001



Country Oak Natural EIR 002



Country Oak Grey EIR 003



Country Oak Natural EIR 002

A close-up view of a light beige oak wood-look laminate flooring. The texture is highly detailed, showing natural wood grain patterns, including knots and subtle variations in tone. The planks are arranged in a staggered, horizontal layout.

COUNTRY OAK BEIGE EIR
iD Essential 30 24707001
iD Essential MAX 30 256112001

A close-up view of a medium brown oak wood-look laminate flooring. The texture is highly detailed, showing natural wood grain patterns, including knots and subtle variations in tone. The planks are arranged in a staggered, horizontal layout.

COUNTRY OAK NATURAL EIR
iD Essential 30 24707002
iD Essential MAX 30 256112002

A close-up view of a dark grey oak wood-look laminate flooring. The texture is highly detailed, showing natural wood grain patterns, including knots and subtle variations in tone. The planks are arranged in a staggered, horizontal layout.

COUNTRY OAK GREY EIR
iD Essential 30 24707003
iD Essential MAX 30 256112003



CERUSED OAK

The Cerused Oak is a trendy lightwood. The variations of colors in the planks play with the contrasts and create a realistic effect. This design offers a lively range of colors and structures.

Cerused Oak Beige EIR
iD Essential 30 24707009
iD Essential MAX 30 256112009

Dimensions:
1219 x 229 mm





CHARM OAK

The Charm Oak is a classic and charming limed wood. Its embossed in register surface brings extra authenticity and its delicate style adds softness and wellness in interiors.

Charm Oak Beige EIR
iD Essential 30 24707012
iD Essential MAX 30 256112012

Dimensions:
1219 x 229 mm



ASPEN OAK

The classic aspen oak, in a natural color, is a timeless wood. It will be in harmony with all styles

Dimensions:
1219 x 229 mm



Aspen Oak Grey 013



Aspen Oak Beige 014



Aspen Oak Natural 016



A close-up view of Aspen Oak Grey laminate flooring. The planks are arranged in a staggered pattern, showing a dark grey-brown color with a realistic oak wood grain texture. The grain runs vertically, with various knot patterns and subtle variations in tone.

ASPEN OAK GREY
iD Essential 30 3977013
iD Essential MAX 30 256106013

A close-up view of Aspen Oak Beige laminate flooring. The planks are arranged in a staggered pattern, showing a light beige or cream color with a realistic oak wood grain texture. The grain runs vertically, with various knot patterns and subtle variations in tone.

ASPEN OAK BEIGE
iD Essential 30 3977014
iD Essential MAX 30 256106014

A close-up view of Aspen Oak Natural laminate flooring. The planks are arranged in a staggered pattern, showing a warm, medium-brown color with a realistic oak wood grain texture. The grain runs vertically, with various knot patterns and subtle variations in tone.

ASPEN OAK NATURAL
iD Essential 30 3977016
iD Essential MAX 30 256106016



BEECH

The classic beech, in a natural color, is a timeless wood. It will be in harmony with all styles.

Beech Natural
iD Essential 30 3977029
iD Essential MAX 30 256106029

Dimensions:
1219 x 229 mm




DELICATE OAK

Classic pattern which is as timeless as the colour range, fitting every demand and lifestyle. The natural surface structure provides a natural feel and touch and is adding serenity to every interior.

Dimensions:
1219 x 229 mm



Delicate Oak Light Brown 080



Delicate Oak Beige 081



Delicate Oak Brown 082



Delicate Light Beige 083



Delicate Oak Beige 081

DELICATE OAK LIGHT BROWN
iD Essential 30 3977080
iD Essential MAX 30 256106080

DELICATE OAK BEIGE
iD Essential 30 3977081
iD Essential MAX 30 256106081

DELICATE OAK BROWN
iD Essential 30 3977082
iD Essential MAX 30 256106082

DELICATE LIGHT BEIGE
iD Essential 30 3977083
iD Essential MAX 30 256106083

MODERN OAK

This flooring feels like a good friend: always there but never intrusive. The well-balanced design is coming in six coordinated colour shades to match every interior style. A perfect starting point to create exciting ambiances based on a timeless but contemporary design.

Dimensions:
1219 x 229 mm



Modern Oak White 084



Modern Oak Light Beige 085




Modern Oak Beige 086




Modern Oak Light Brown 087



Modern Oak Brown 088



Modern Oak Natural 089



Modern Oak Brown 088

MODERN OAK WHITE
iD Essential 30 3977084
iD Essential MAX 30 256106084

MODERN OAK LIGHT BEIGE
iD Essential 30 3977085
iD Essential MAX 30 256106085

MODERN OAK BEIGE
iD Essential 30 3977086
iD Essential MAX 30 256106086

MODERN OAK LIGHT BROWN
iD Essential 30 3977087
iD Essential MAX 30 256106087

A close-up image of a dark brown wood grain pattern, likely a laminate or veneer. The grain is vertical and shows a mix of dark and medium brown tones with some lighter, wavy lines.

MODERN OAK BROWN
iD Essential 30 3977088
iD Essential MAX 30 256106088

A close-up image of a light brown wood grain pattern, likely a laminate or veneer. The grain is vertical and shows a mix of light and medium brown tones with some darker, wavy lines.

MODERN OAK NATURAL
iD Essential 30 3977089
iD Essential MAX 30 256106089

PRIMARY PINE

Primary pine is a popular softwood and known for its color with straight grain, a good choice for rustic and country decor.

Dimensions:
1219 x 229 mm



Primary Pine Natural 020



Primary Pine White 021



PRIMARY PINE NATURAL
iD Essential 30 3977020
iD Essential MAX 30 256106020



PRIMARY PINE WHITE
iD Essential 30 3977021
iD Essential MAX 30 256106021



SMOKED OAK

Smoked Oak is an authentic wood with cracks and saw effects. Its look will add personality to any room in your house.

Dimensions:
1219 x 229 mm



Smoked Oak Light Grey 005

Smoked Oak Black 000



Smoked Oak Brown 001



Smoked Oak Natural 002



Smoked Oak Light Grey 004



Smoked Oak White 005



A close-up image of a wood surface with a dark, almost black, smoky finish. The wood grain is visible but muted by the dark color.

SMOKED OAK BLACK
iD Essential 30 3977000
iD Essential MAX 30 256106000

A close-up image of a wood surface with a natural, medium-brown finish. The wood grain is clearly visible, showing various patterns and textures.

SMOKED OAK NATURAL
iD Essential 30 3977002
iD Essential MAX 30 256106002

A close-up image of a wood surface with a dark brown, smoky finish. The wood grain is visible, showing a mix of dark and lighter brown tones.

SMOKED OAK BROWN
iD Essential 30 3977001
iD Essential MAX 30 256106001

SMOKED OAK LIGHT GREY
iD Essential 30 3977004
iD Essential MAX 30 256106004



SMOKED OAK WHITE
iD Essential 30 3977005
iD Essential MAX 30 256106005



SOFT OAK

Soft Oak is a very elegant and appealing wood design inspired by the distinctive knots, grain and texture of oak for a beautiful organic feel.

Dimensions:
1219 x 229 mm




Soft Oak Natural 008

Soft Oak Brown 007



Soft Oak Natural 008



Soft Oak Beige 009



Soft Oak Light Grey 010



Soft Oak White 011



Soft Oak light Brown 012




Soft Oak Light Beige 015




A close-up view of a wood flooring sample with a dark brown, rich, and slightly mottled finish. The wood grain is clearly visible, showing vertical lines and some darker knots. The planks are arranged in a staggered pattern.

SOFT OAK BROWN
iD Essential 30 3977007
iD Essential MAX 30 256106007

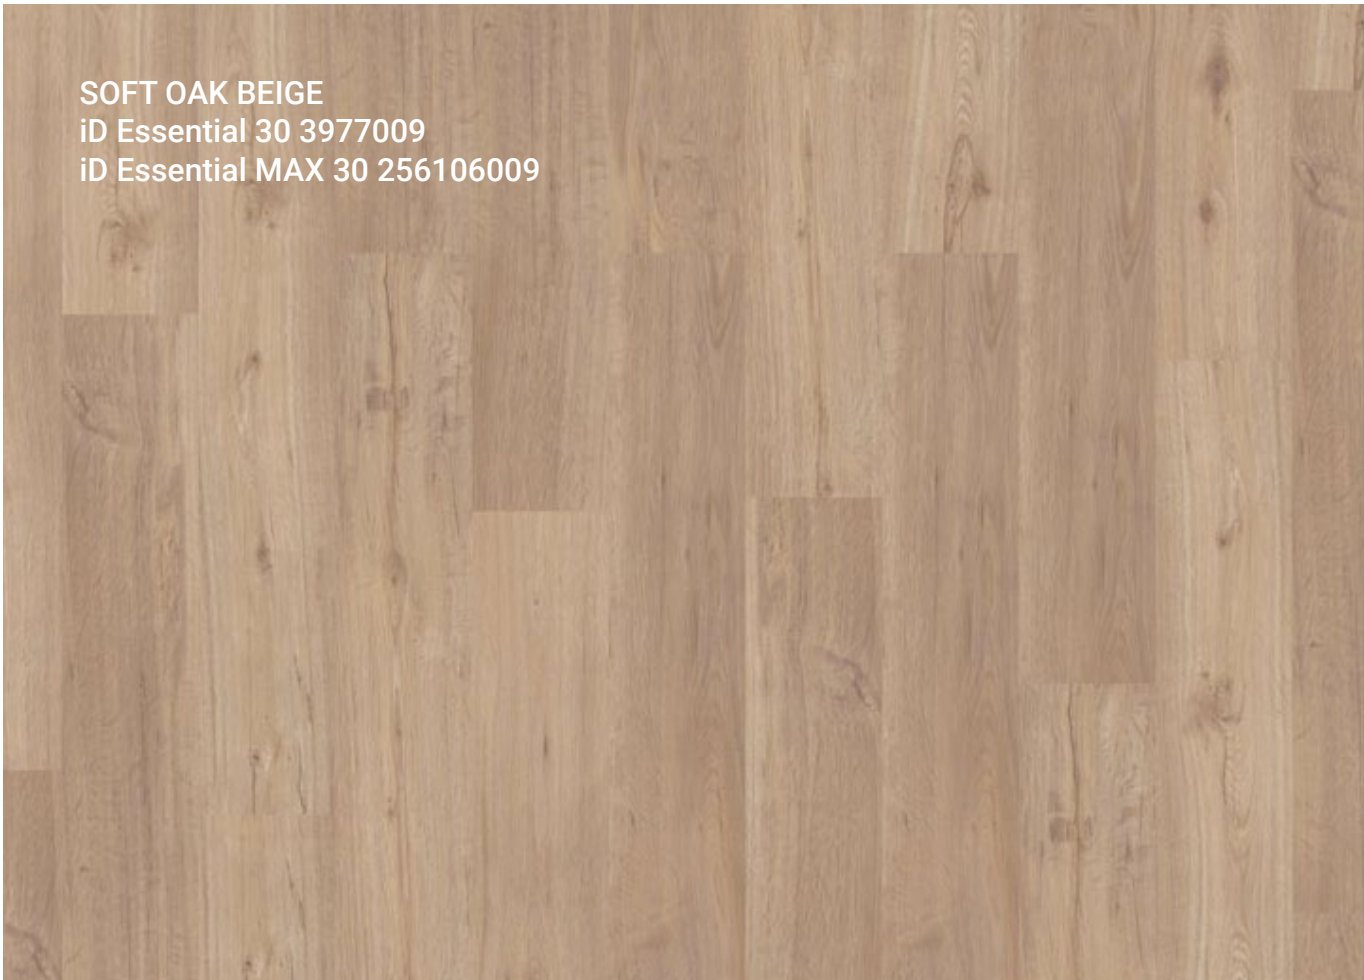A close-up view of a wood flooring sample with a light beige, warm, and slightly mottled finish. The wood grain is clearly visible, showing vertical lines and some darker knots. The planks are arranged in a staggered pattern.

SOFT OAK BEIGE
iD Essential 30 3977009
iD Essential MAX 30 256106009

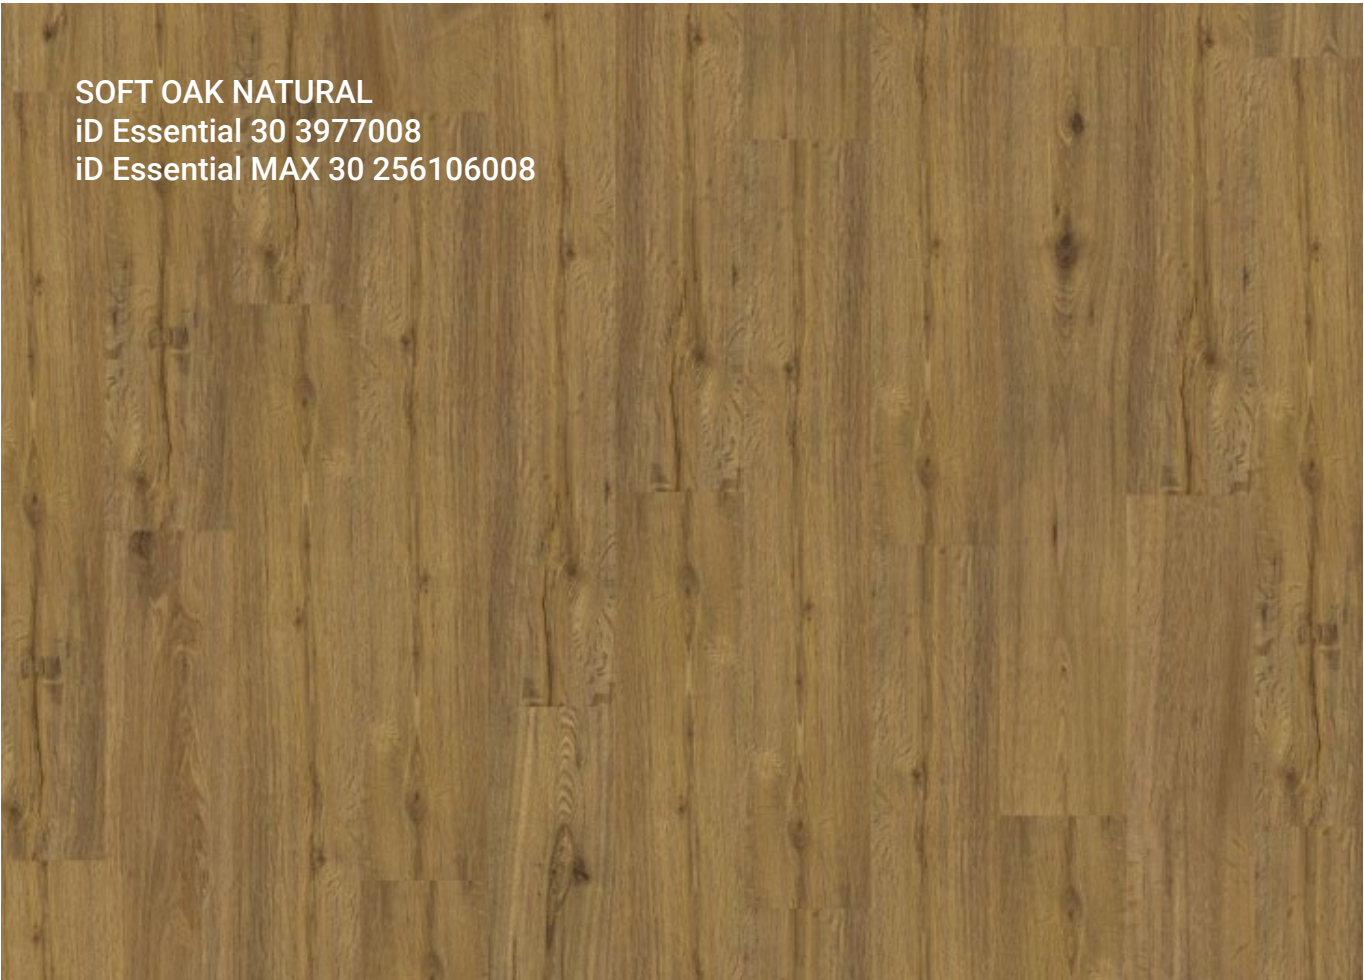A close-up view of a wood flooring sample with a natural, medium-brown, and slightly mottled finish. The wood grain is clearly visible, showing vertical lines and some darker knots. The planks are arranged in a staggered pattern.

SOFT OAK NATURAL
iD Essential 30 3977008
iD Essential MAX 30 256106008

A close-up view of a wood flooring sample with a light grey, cool, and slightly mottled finish. The wood grain is clearly visible, showing vertical lines and some darker knots. The planks are arranged in a staggered pattern.

SOFT OAK LIGHT GREY
iD Essential 30 3977010
iD Essential MAX 30 256106010

A close-up image of a wood surface with a light, creamy white color and a subtle, natural grain pattern. The texture is smooth with some minor variations in tone and grain direction, typical of soft oak.

SOFT OAK WHITE
iD Essential 30 3977011
iD Essential MAX 30 256106011

A close-up image of a wood surface with a warm, light brown color and a prominent, natural grain pattern. The texture is smooth with some minor variations in tone and grain direction, typical of soft oak.

SOFT OAK LIGHT BROWN
iD Essential 30 3977012
iD Essential MAX 30 256106012

A close-up image of a wood surface with a light beige color and a subtle, natural grain pattern. The texture is smooth with some minor variations in tone and grain direction, typical of soft oak.

SOFT OAK LIGHT BEIGE
iD Essential 30 3977015
iD Essential MAX 30 256106015




TEAK

The Teak adds a warm and exotic touch.

Teak Natural
iD Essential 30 3977031
iD Essential MAX 30 256106031

Dimensions:
1219 x 229 mm

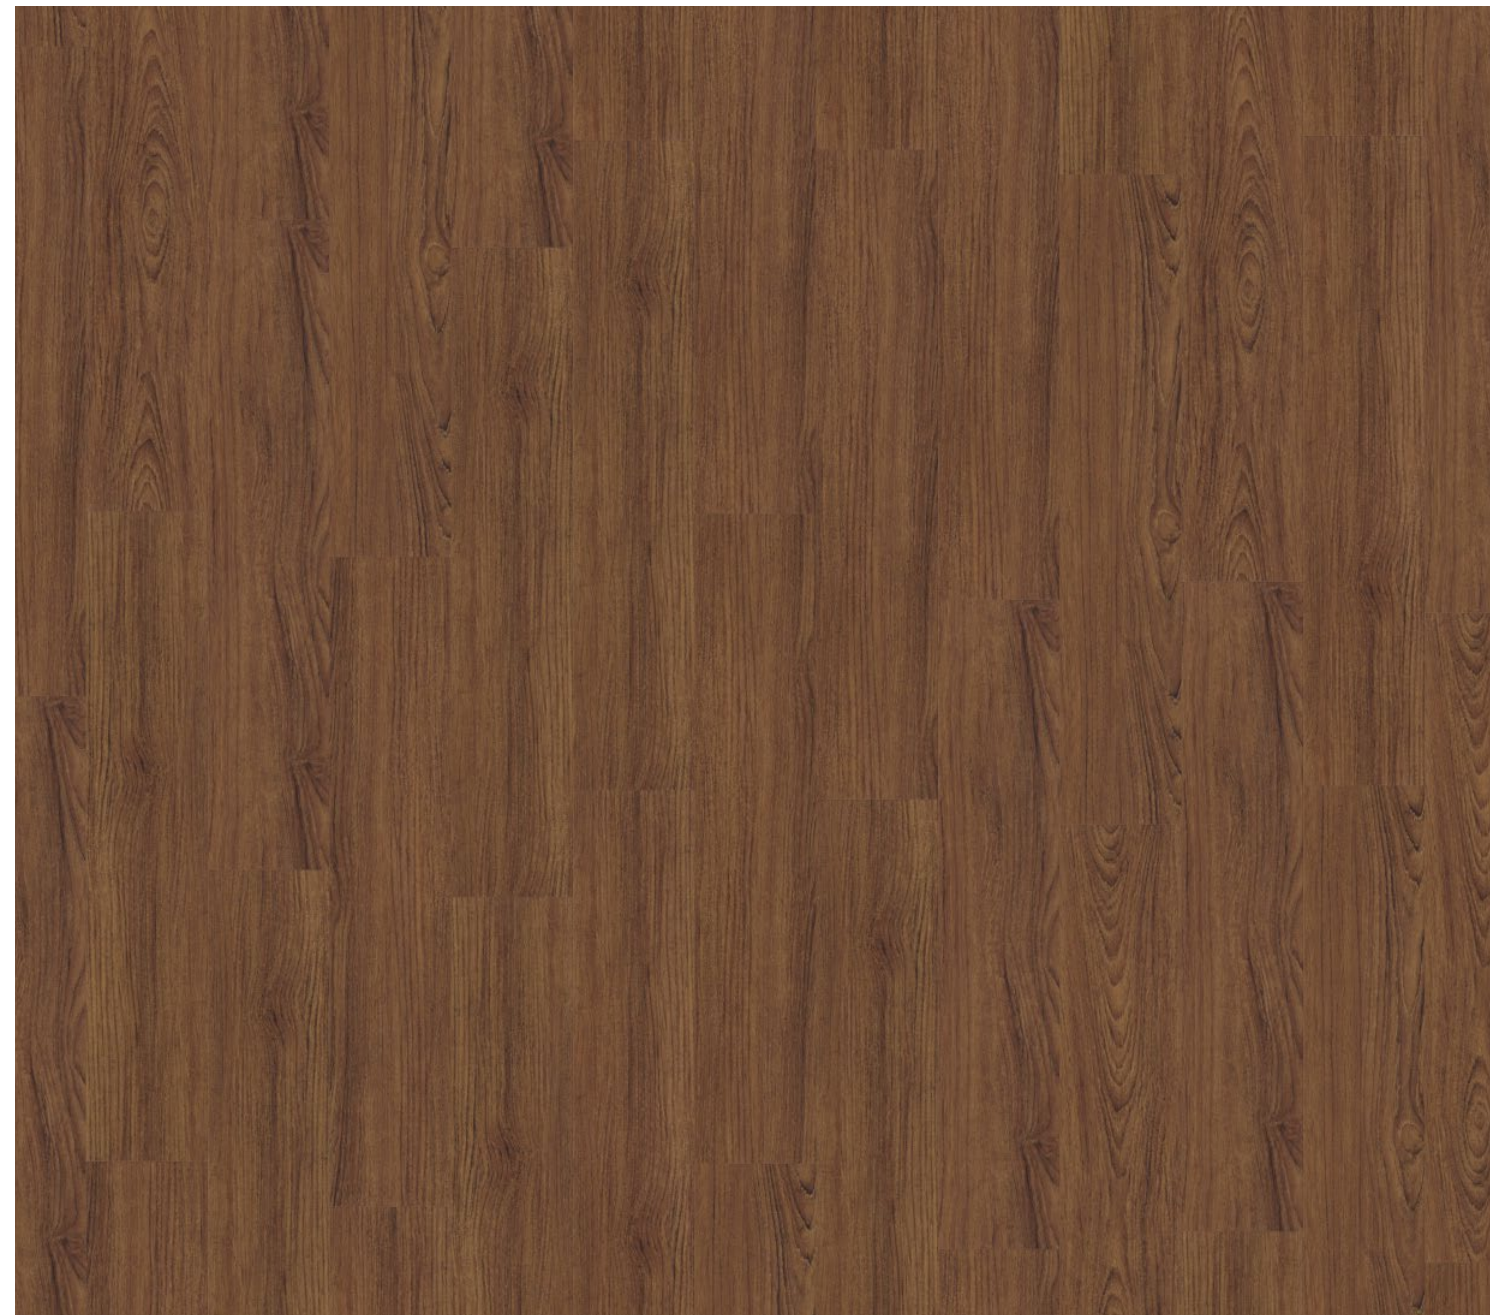

VERSAILLES OAK

The distinctive and elegance design adds a classic touch to any spaces, making it suitable for both traditional and contemporary interiors.

Dimensions:
457 X 457 mm



Versailles Oak Light Brown 011



Versailles Oak Dark Brown 012



Versailles Oak Light Brown 011

VERSAILLES OAK LIGHT BROWN
iD Essential 30 276004011
iD Essential MAX 30 256107011



VERSAILLES OAK DARK BROWN
iD Essential 30 276004012
iD Essential MAX 30 256107012






WALNUT

The classic wood pattern gives rich, deep tones and striking grain patterns.

Walnut Light Brown
iD Essential 30 3977030
iD Essential MAX 30 256106030

Dimensions:
1219 x 229 mm

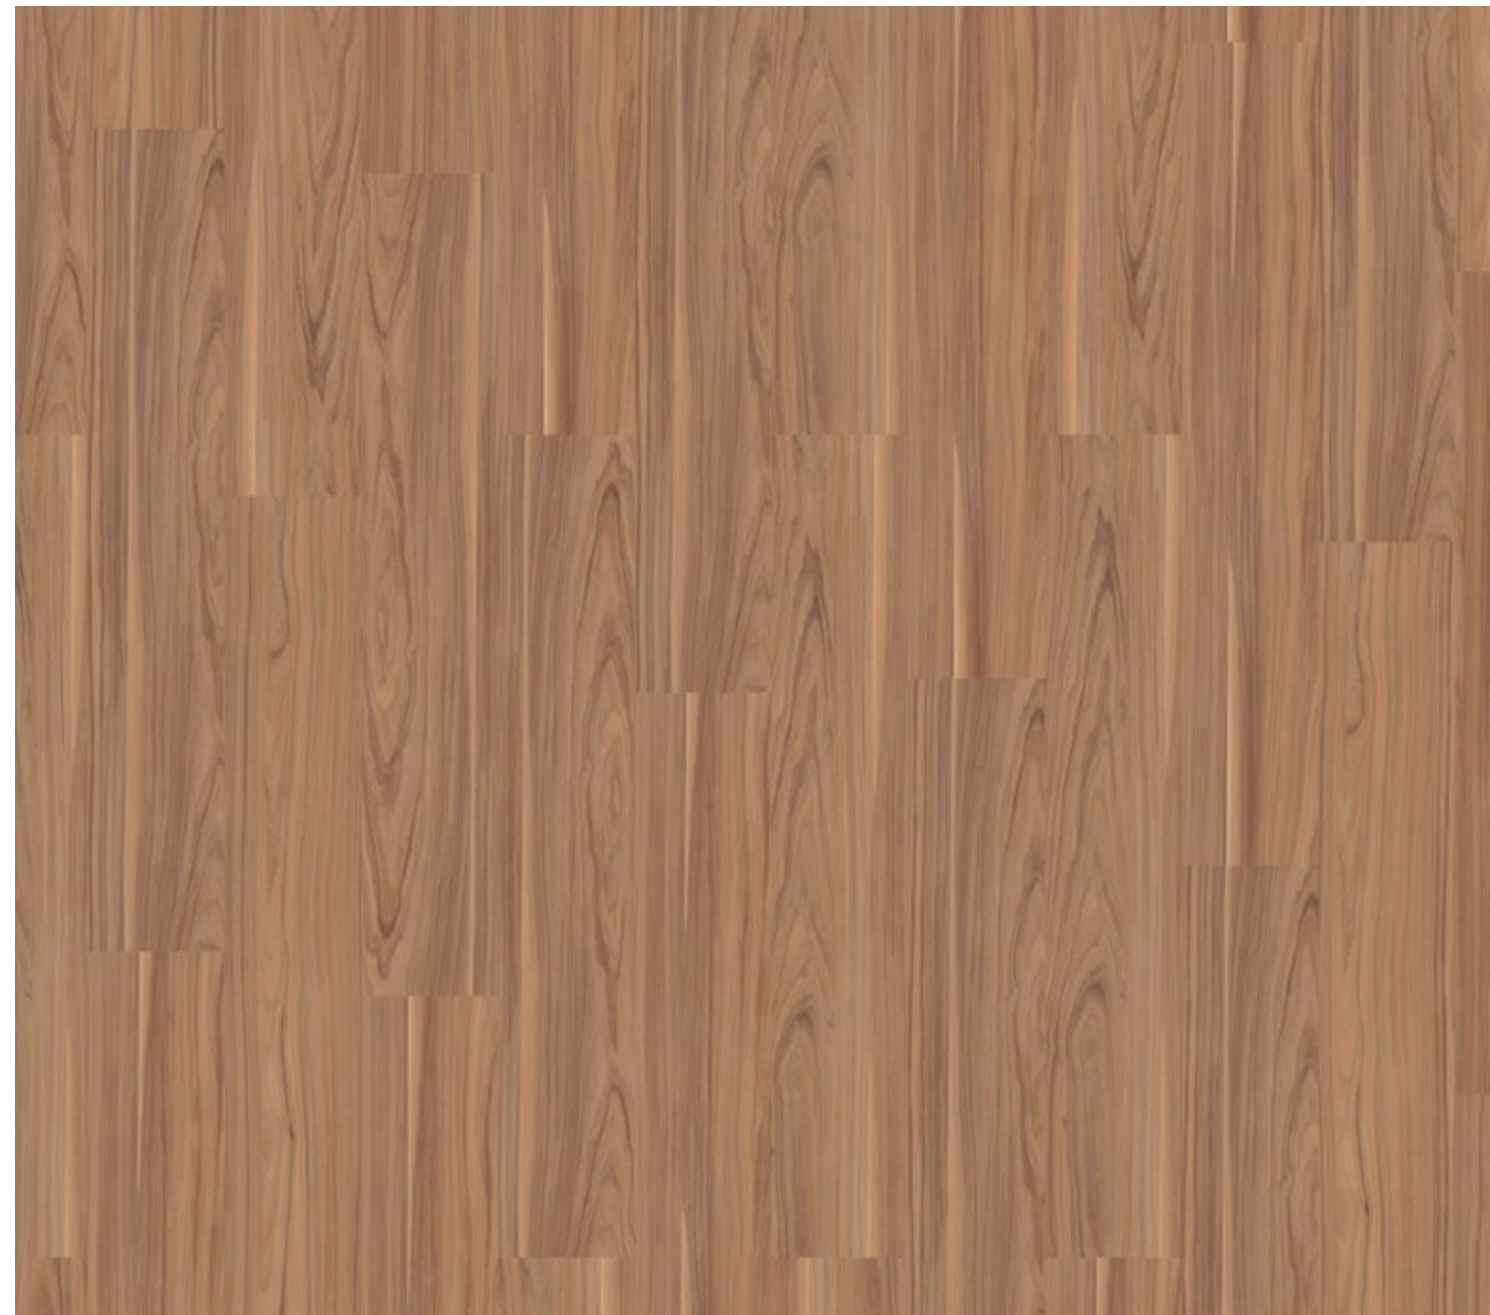

BRECCIA

This timeless classic in cold grey and black colours transforms a centuriesold style of flooring into contemporary design.


Dimensions:
610 X 305 mm



Breccia Light Grey 021



Breccia Black 022

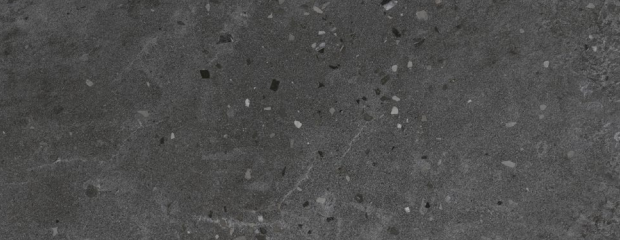

Breccia Light Grey 021

BRECCIA LIGHT GREY
iD Essential 30 3979021
iD Essential MAX 30 256108021



BRECCIA BLACK
iD Essential 30 3979022
iD Essential MAX 30 256108022




CEMENT

Cement has a polished-concrete design with subtle patterns in a warm black colour. The cement design gives to the tile a nice finishing and industrial touch.

Dimensions:
610 X 305 mm



Cement Grey 309

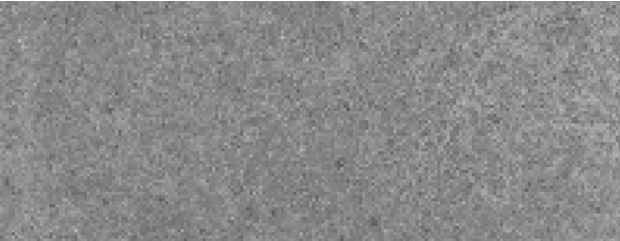

Cement Medium Dark 312



Cement Grey 309

CEMENT GREY
iD Essential 30 3979309
iD Essential MAX 30 256108309

CEMENT MEDIUM DARK
iD Essential 30 3979312
iD Essential MAX 30 256108312



MARBLE

The most classic marble in an allover designs.

Marble Classic
iD Essential 30 3979020
iD Essential MAX 30 256108020

Dimensions:
610 X 305 mm



ORIGINAL SLATE

Designed to mimic a real slate floor, Original Slate adds a modern industrial look with a beautiful finish. It blends well with wooden furniture, offering unique and unconventional ambiances.

Dimensions:
610 X 305 mm



Original Slate Black 006



Original Slate Grey 007



Original Slate Grey 007

ORIGINAL SLATE BLACK
iD Essential 30 3979006
iD Essential MAX 30 256108006

ORIGINAL SLATE GREY
iD Essential 30 3979007
iD Essential MAX 30 256108007



STANDSTONE

The Sandstone is an authentic and natural stone. It creates a traditional ambiance in your interior

Sandstone Black
iD Essential 30 3979004
iD Essential MAX 30 256108004

Dimensions:
610 X 305 mm






STONEART

This design based on a concrete background is using the same overprint pattern.

Stoneart Medium Grey
iD Essential 30 3979023
iD Essential MAX 30 256108023

Dimensions:
610 X 305 mm

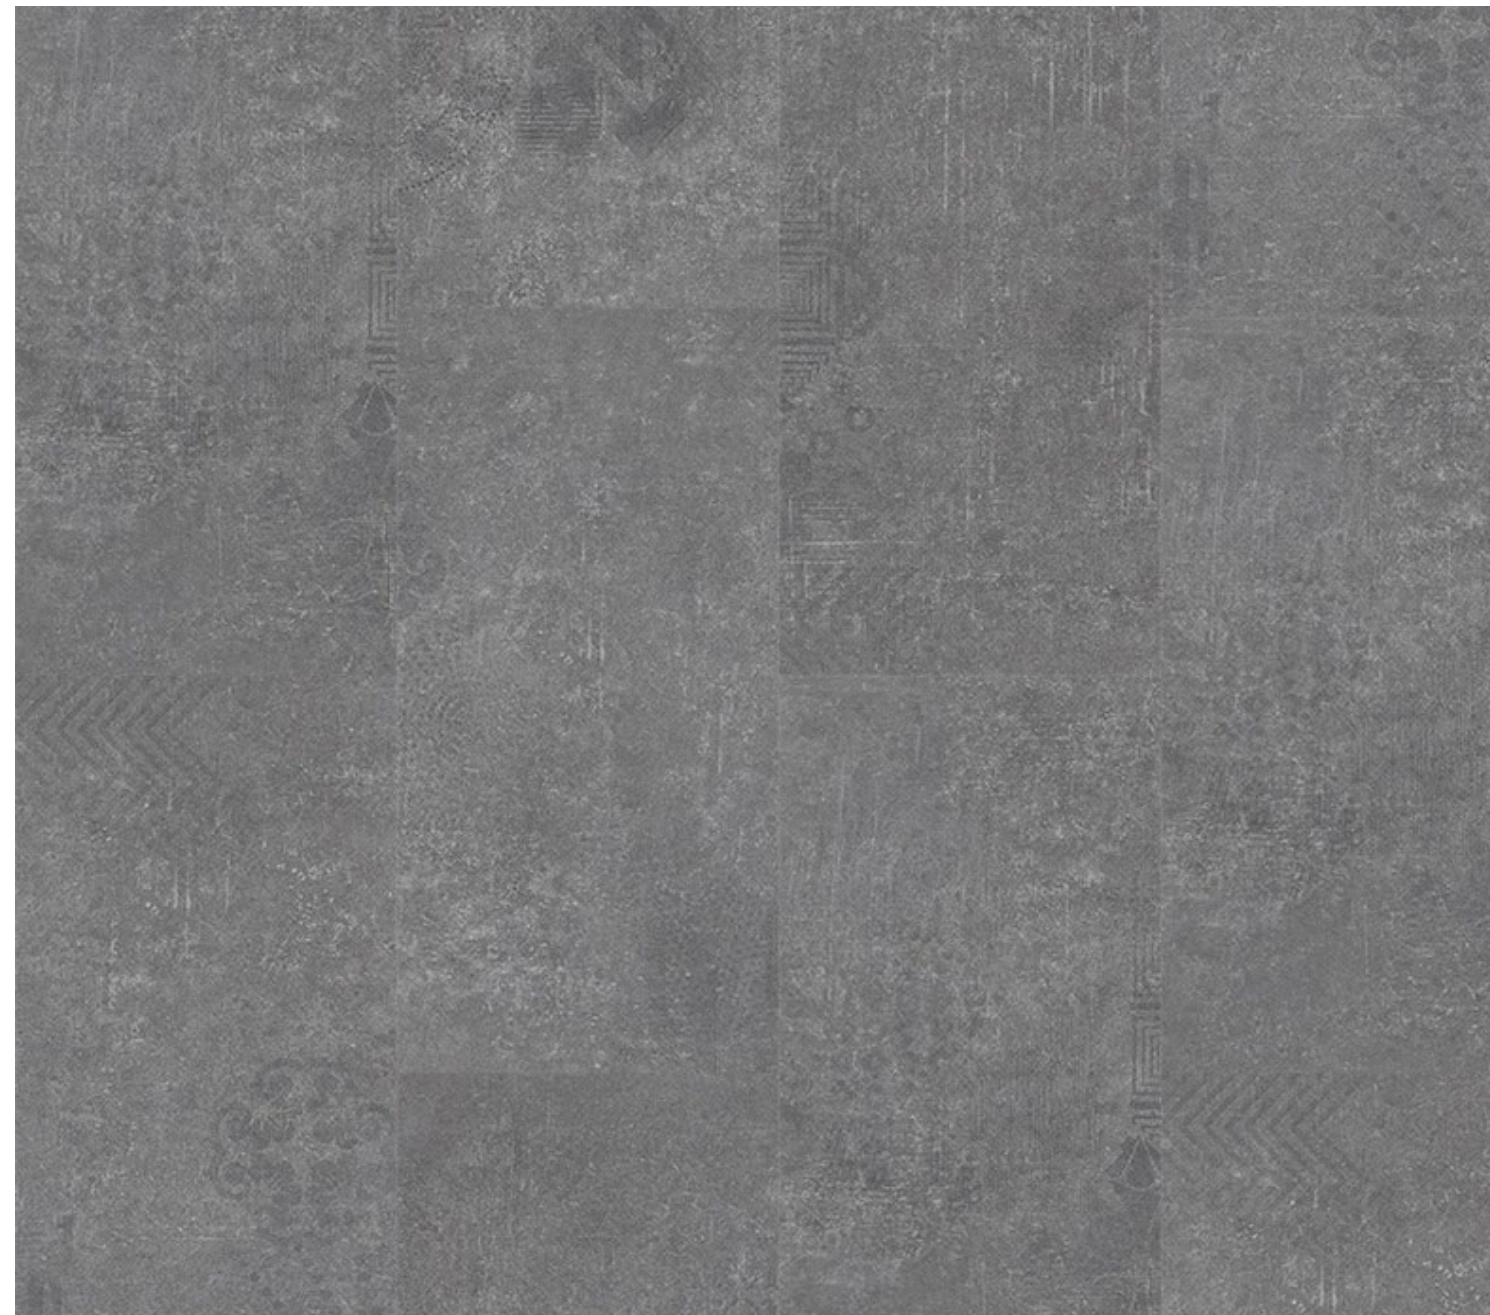




TERRAZZO

Classic Terrazzo pattern by giving a natural, organic look.

Terrazzo Classic
iD Essential 30 3979024
iD Essential MAX 30 256108024

Dimensions:
610 X 305 mm

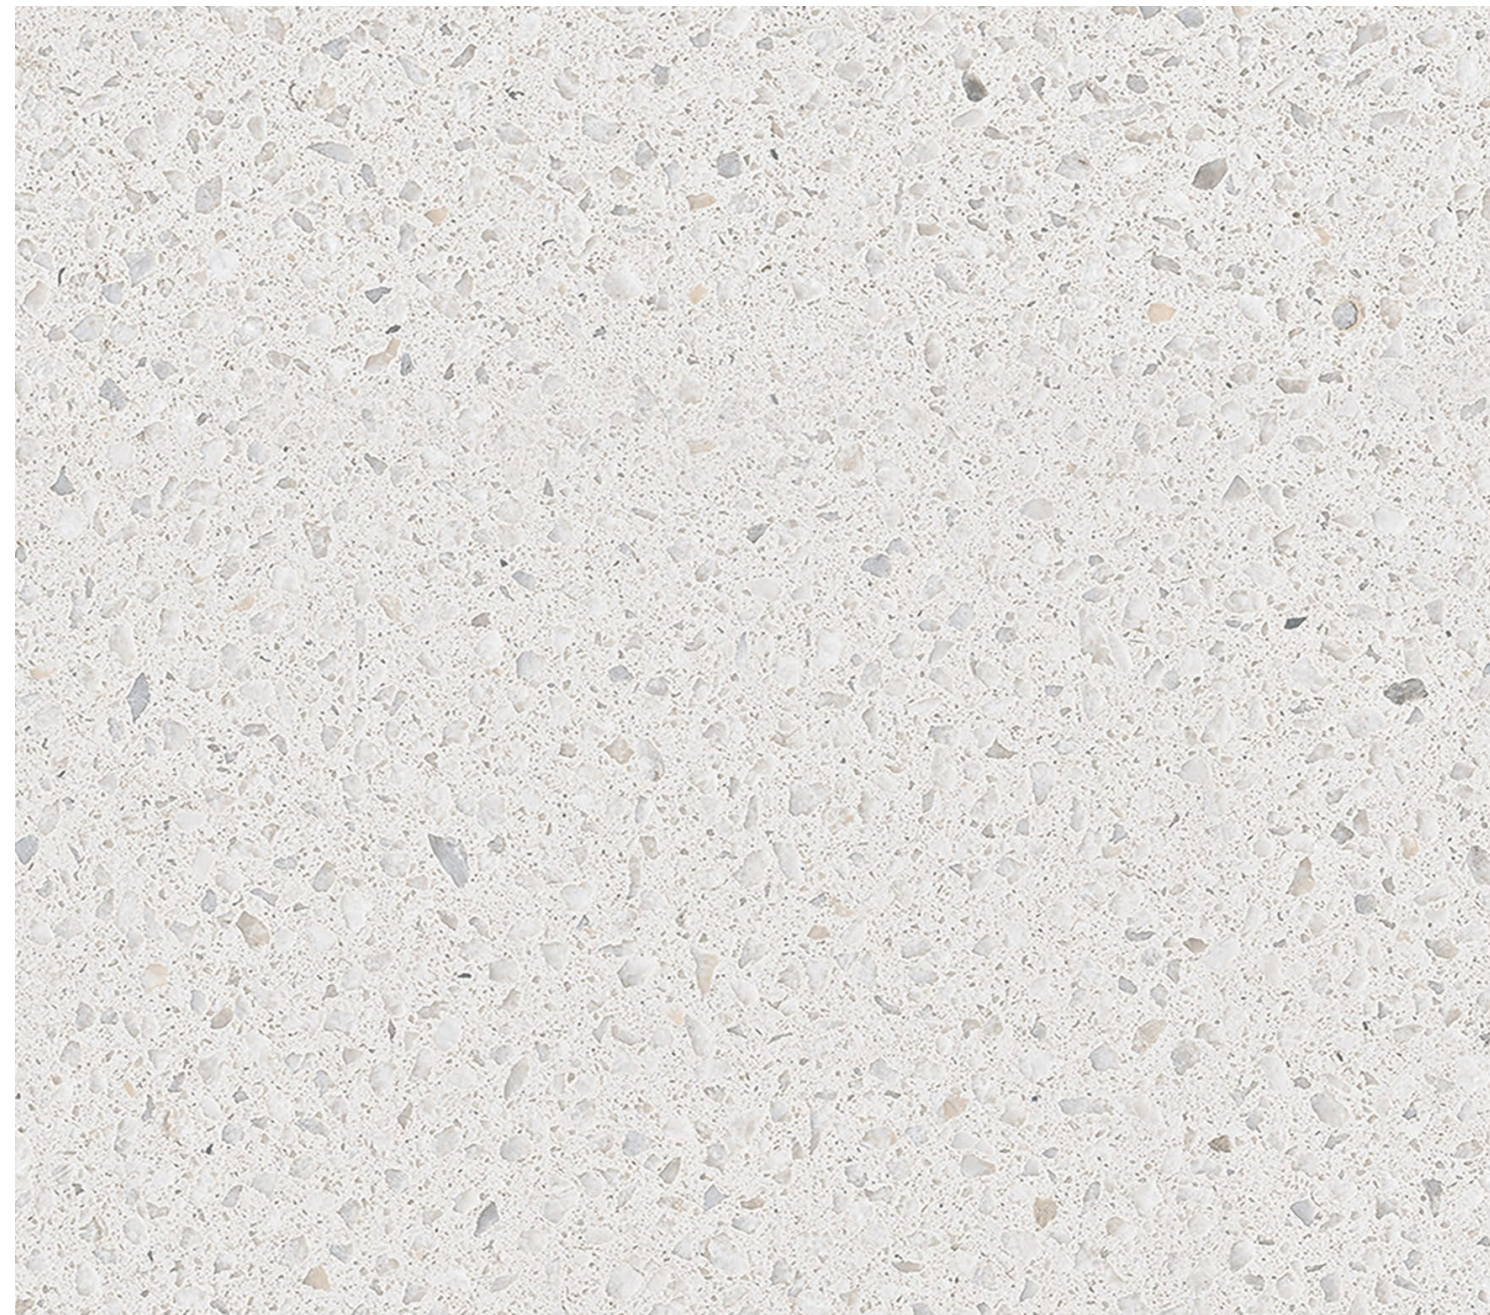

VENEZIA

Venezia is a design inspired by overcast concrete. This timeless classic in cold grey colours transforms a centuries-old style of flooring into contemporary design.

Dimensions:
610 X 305 mm



Venezia Grey 001



Venezia Beige 002



Venezia Grey 001

ENEZIA GREY
iD Essential 30 3979001
iD Essential MAX 30 256108001

ENEZIA BEIGE
iD Essential 30 3979002
iD Essential MAX 30 256108002

ABSTRACT

Abstract catches the hues of irregular shapes, transforming an area into a dynamic atmosphere. The pattern presents an intricate study of light vs dark, tone-on-tone colours.


Dimensions:
610 X 305 mm



Abstract Dark Grey 013



Abstract Light Grey 014

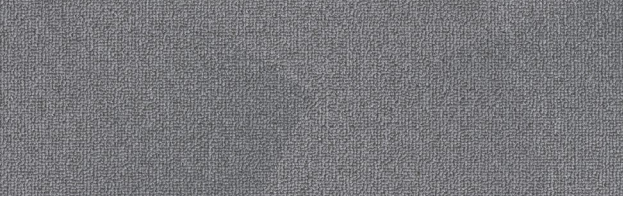


Abstract Steel Blue 015



Abstract Light Grey 014

The background is a dark grey color with a subtle, repeating pattern of overlapping geometric shapes, primarily triangles and polygons, creating a textured, three-dimensional effect.

ABSTRACT DARK GREY
iD Essential 30 276004013
iD Essential MAX 30 256107013

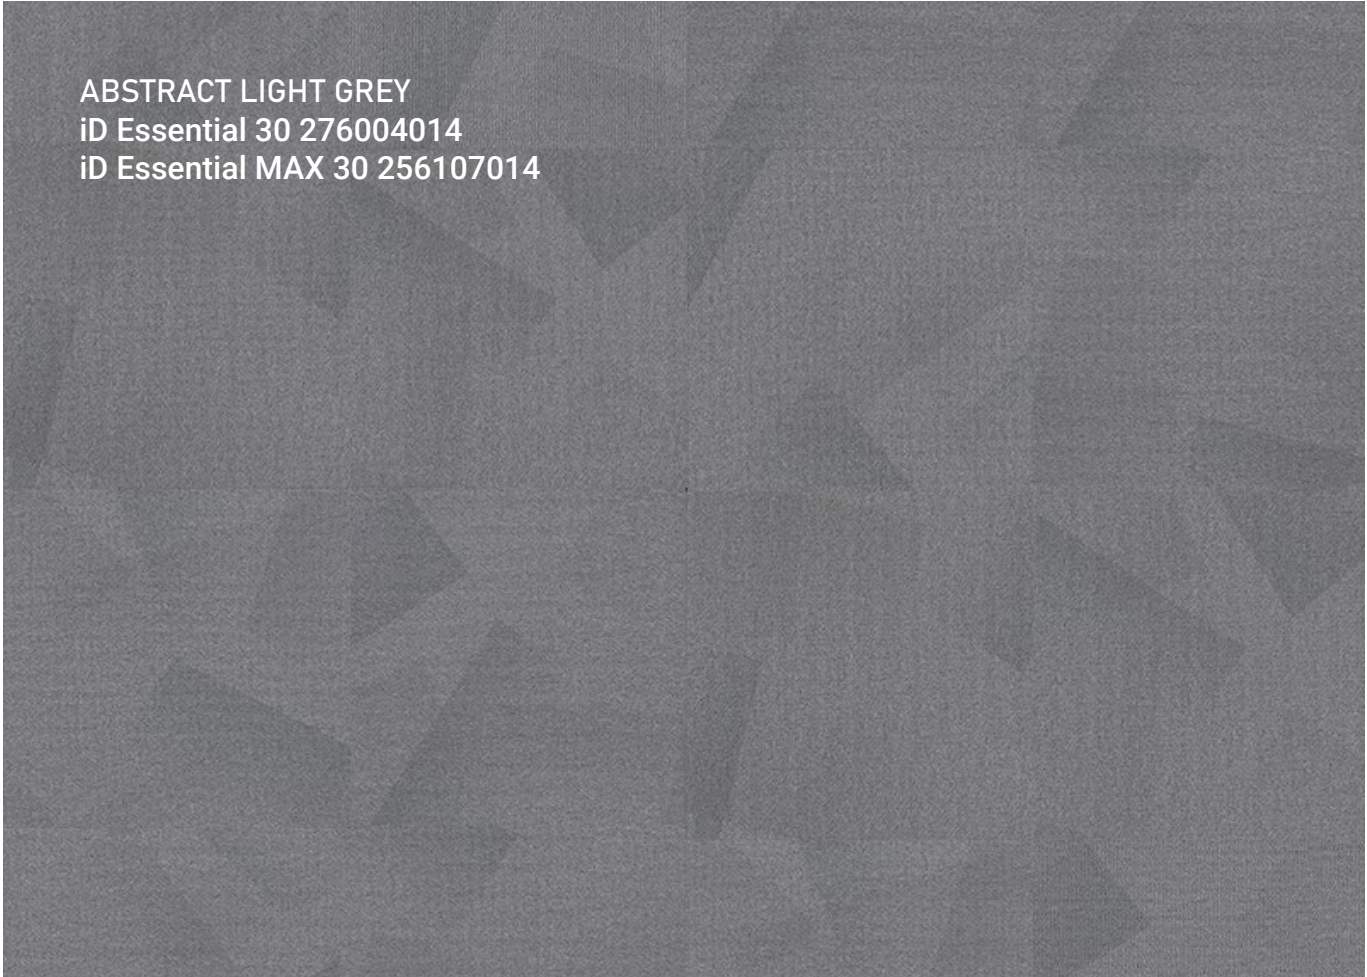The background is a light grey color with a subtle, repeating pattern of overlapping geometric shapes, primarily triangles and polygons, creating a textured, three-dimensional effect.

ABSTRACT LIGHT GREY
iD Essential 30 276004014
iD Essential MAX 30 256107014

The background is a steel blue color with a subtle, repeating pattern of overlapping geometric shapes, primarily triangles and polygons, creating a textured, three-dimensional effect.

ABSTRACT STEEL BLUE
iD Essential 30 276004015
iD Essential MAX 30 256107015

LINEART

LineArt is impacting dramatic elegance and freshness to interior spaces. Its deliberate multi-colour stripe allows designers to tie-in colour accents from seating, walls and accessories, the interior design and furnishings together.

Dimensions:
610 X 305 mm



LineArt Light Blue 019



LineArt Sand 020



LINEART LIGHT BLUE
iD Essential 30 276004019
iD Essential MAX 30 256107019

LINEART SAND
iD Essential 30 276004020
iD Essential MAX 30 256107020


LINEFLOW

Classic linear design with mass appealing, to bring a simple and calm ambiance.

Dimensions:
610 X 305 mm



Lineflow Light Grey 016

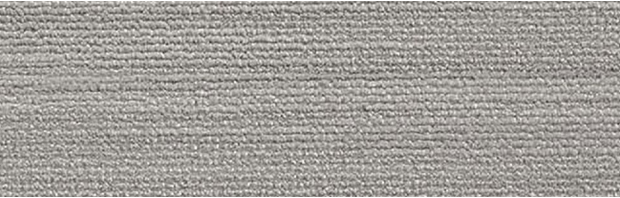

Lineflow Medium Grey 017



Lineflow Blue 018



Lineflow Light Grey 016



LINEFLOW LIGHT GREY
iD Essential 30 276004016
iD Essential MAX 30 256107016



LINEFLOW MEDIUM GREY
iD Essential 30 276004017
iD Essential MAX 30 256107017



LINEFLOW BLUE
iD Essential 30 276004018
iD Essential MAX 30 256107018

LINEN

A pattern inspired by fabric, available in 6 vivid tones of colours.

Dimensions:
1219 x 229 mm



Linen Dark Blue 324



Linen Green 325



Linen Middle Blue 326



Linen Orange 327



Linen Red 328



Linen Brown 329



LINEN DARK BLUE
iD Essential 30 3977324
iD Essential MAX 30 256106324

LINEN GREEN
iD Essential 30 3977325
iD Essential MAX 30 256106325

LINEN MIDDLE BLUE
iD Essential 30 3977326
iD Essential MAX 30 256106326

LINEN ORANGE
iD Essential 30 3977327
iD Essential MAX 30 256106327

LINEN RED
iD Essential 30 3977328
iD Essential MAX 30 256106328

LINEN BROWN
iD Essential 30 3977329
iD Essential MAX 30 256106329


TISSE

A linear pattern, available in 5 soft and pale pastel colours.

Dimensions:
1219 x 229 mm



Tisse Pale Blue 330



Tisse Pale Green 331



Tisse Pale Orange 332



Tisse Pale Yellow 333



Tisse Yellow 334



Tisse Pale Yellow 333 / Tisse Yellow 334

TISSE PALE BLUE
iD Essential 30 3977330
iD Essential MAX 30 256106330

TISSE PALE GREEN
iD Essential 30 3977331
iD Essential MAX 30 256106331

TISSE PALE ORANGE
iD Essential 30 3977332
iD Essential MAX 30 256106332

TISSE PALE YELLOW
iD Essential 30 3977333
iD Essential MAX 30 256106333

TISSE YELLOW
iD Essential 30 3977334
iD Essential MAX 30 256106334

Installation Instructions

IMPORTANT :

- Make sure all specifications and instructions are followed carefully.
- Contact your Tarkett representative if you are unsure about any part of the installation.
- This is subject to change due to continuous improvement.
- Use the same shade number for each continuous surface. Store the boxes in small neat piles (max. 5 boxes high).
- Let the flooring acclimatise at least 24h before laying at room temperature (minimum 15°C).
- The subfloor must be flat, level, clean, without marks (no felt pen, marker, etc.), sound, dry, solid, hard, smooth and not exposed to moisture. Absorbency must be checked and adjusted to have moderately absorbent subfloor.
- Use only adhesives recommended by Tarkett and developed for LVT installation. Always follow the adhesive manufacturer's instructions and recommendations.
- For specific areas with sunlight exposure (winter , garden...), select an adapted adhesive recommended by manufacturers.
- The work must be completed with an inspection: ensure that the newly laid floor is free from adhesive residues.

A - PREPARATION AND IMPORTANT INFORMATION PRIOR TO INSTALLATION

A.1 Acclimatization

It is important to store the planks for at least 24 hours before installation at a minimum room temperature of 15°C /see each country regulations/. This temperature should be maintained throughout the installation.

A.2 Room temperature conditions

The minimum temperature of the subfloor should be 10-12°C and room temperature 15°C /see each country regulations/. The recommended relative humidity inside the room should be 35-65% /see each country regulations/.

Planks should be stored flat in their packages, in small neat piles (max. 5 boxes high).

A.3 Subfloor condition

The subfloor must be level, flat, clean, free from marks (no felt pen, marker of any type, ballpoint pens, paint, etc., that could cause discoloration due to migration) sound, dry, solid, hard, smooth (the absorbency must be checked) and not exposed to moisture. The preparation/dryness of the subfloor and installation procedures should all be in accordance with the current

If any doubts or clarifications should be needed, please contact your local Tarkett representative for further information.

relevant Standard within the country of use. The dryness of a solid subfloor should be below the maximum moisture level permitted when tested in accordance with that Standard..

E.g. in the UK, the relative humidity of concrete surfaces must be below 75%, and less than 2% with the CCM method. In North America, ASTM F-170 recommends a water-to-cement ratio of 0.40 to 0.45.

Before selecting a smoothing compound, check what type of traffic the floorcovering will be subjected to once installed. will receive heavy traffic, especially heavy, narrow wheeled traffic (see EN 12529, Castors and wheels). Check levelling compound compatibility, and follow the instructions of the levelling compound manufacturer.

Note: exclusion of liability (adhesives, levelling compounds, etc.) Although Tarkett may list a selection of adhesive, levelling compound and surface damp-proof membrane manufacturers and types, we do not guarantee the products listed. The list of products and manufacturers is not guaranteed complete or current.

Tarkett will accept no liability for any of these products failing to perform in conjunction with any of its products. It is the responsibility of the adhesive, levelling compound and surface damp-proof membrane manufacturer and flooring contractor to ensure the products being used are appropriate for use and applied in accordance with the manufacturers' recommendations.

A.4 Underfloor heating

It is imperative that underfloor heating systems have been previously commissioned and found to be functioning correctly before installation of the floorcovering.

Ensure that the underfloor heating system is switched off 48 hours before installation of the floorcovering commences, and remains off for at least 48 hours after installation is completed. While the underfloor heating system is off, an alternative heating source should be provided, if required, to ensure that the installation area is kept at a constant temperature of 18-27°C. Gradually increase the temperature over a number of days by only a few degrees per day until the desired room temperature is reached.

The temperature should never exceed the floorcovering industry's agreed maximum of 27°C on the underside of the floorcovering (the adhesive line).

B – INSTALLATION

Before starting to install tiles/planks, determine the type of laying taking into account the shape of the room and the design to be laid.

Important! Before laying the first rows of tiles, check that:

- the cut tiles closest to the walls are more than 10 cm wide;
- at doorways and corners, the cut tiles are not less than half a whole tile.

Tiles

- Tiles are marked on the reverse with arrows. Tiles should be laid in a checkerboard pattern.
- Installation should start from the center of the room and finish on the sides (walls).

Planks

- Stagger each row of planks to ensure that the end joints do not coincide with the previous row installed.
- For wooden pattern, avoid to install planks with the same design next to each other.

B.2 Gluing¹

- Glue with an acrylic adhesive emulsion recommended by Tarkett. Apply about 250 g/m² using the recommended trowel (A1 according to TKB norm).
- Always follow the adhesive manufacturer's instructions and respect adhesive drying and working time.
- In case of particular conditions, ie. significant temperature variation (veranda, winter garden...) or heavy traffic, bi-component adhesive could be required.
- Place the tiles or planks tight edge to edge.
- After selected area installation, press manually the tiles or planks using a piece of board with a rounded edge.
- After manual pressing, use a heavy roller in both directions to ensure final bonding.

¹For more details on gluing, please refer to the separate sheet: Adhesives.

C – AFTER INSTALLATION IMPORTANT!

Wait 48 to 72 hours before allowing any foot traffic or moving in furniture.

C.1 Protection of installation

- If building work is carried out after installation, the floor should always be protected by covering it with hardboard or plywood sheeting.
- Masking tape must not be stuck directly to the floor. Never subject a newly installed floorcovering to heavy wheeled traffic at an early stage, as this will force adhesive from beneath the floorcovering.

C.2 Initial site clean

- An initial site clean is always recommended before the new floorcovering is commissioned.
- Residual adhesive should be removed with methylated spirits and a clean cloth.
- Lightly soiled floors: vacuum, sweep or damp mop the area to remove loose dirt and building dust. A combined machine is very effective for large areas (combined scrubber/dryer with cylindrical brushes for safety flooring).

Modern day-room cleaning aims to reduce wet cleaning procedures and replace them with drier cleaning techniques. For example, the use of centrally laundered pre-impregnated mops and the wide application of appropriate machines. This makes work more effective and easier for the cleaning staff, and minimizes environmental impact. Less cleaning chemicals and less fresh water are used.

GENERAL ADVICE

- Clean the floorcovering regularly as this is more cost effective and hygienic than occasional heavy duty cleaning.
- Always follow dosage instructions carefully.
- Wipe up any grease and spilt oil immediately, as it may damage the surface.
- Resilient floors are damaged by solvents.
- Black rubber wheels and rubber feet can discolour the floorcovering. All chair and table legs should have good quality feet. Felt feet are not recommended in commercial interiors. Hard plastic is preferred.
- Remember that light colours need more frequent cleaning.

PREVENTIVE CARE



Entrance matting
About 80% of surface soiling that has to be cleaned off is brought from outside. And 90% of that soiling can be avoided by an effective and correctly dimensioned entrance mat. The less dirt that comes in through the entrance, the lower the maintenance requirements.

DAILY AND REGULAR CLEANING



Dry mopping
Remove dust and dirt with dry mop.

OR



Vacuum cleaning
To remove dust and loose dirt. Recommended for large areas and initial site cleaning.



Damp mopping
Use a mop dampened with water or detergent solution. It is essential that water does not stay on the floor or leave a film. The floor should be virtually dry after 15-20 seconds.

OR



Combined machine with brush
Industrial machine-cleaning (large areas). Use diluted neutral detergent. Adjustable speed 300-500rpm. Use nylon brush not white/beige pad !



Manual brush
Brush (with medium brushes).

OR



Rotowash with brushes
Spray diluted detergent and clean with water or water+detergent.



Spot and stain removal
Treat stains immediately. Hand spot using a white/red nylon pad with neutral detergent (solvents should not be used). Work from the outside of the mark towards its centre. Rinse and wipe afterwards with clean water.

PERIODICAL CLEANING



Light soiling: Spray Cleaning
Mix water and neutral detergent in the container tank. Suitable speed 300-500rpm. Red pad is recommended.



Heavy soiling: Rotowash
Clean with the cylindrical scrubbing machine (spray detergent diluted with water through the machine).

If needed:



Dry buffing
When necessary, dry buff to recover gloss. White-beige pad. Suitable speed is 500-1000rpm.

If any doubts or clarifications should be needed, please contact your local Tarkett representative for further information.

Cleaning & maintenance instructions



TopCleanXP surface Treatment

The TopClean surface treatment is a PUR reinforcement that offers good cleaning and maintenance properties, at a low initial cost.

TopCleanXP surface Treatment

Always protect the floor with thick paper or hardboard sheeting during the construction period.

After installation, always clean the new floor: vacuum, sweep or damp mop the area to remove building dust and loose dirt.

iD Essential 30
iD Essential MAX 30
LUXURY VINYL TILES

TECHNICAL DATA	STANDARD	iD ESSENTIAL 30	iD ESSENTIAL MAX 30
CLASSIFICATION			
Classification	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	
	EN ISO 10874	Domestic: 23 - Commercial: 31	
Wear layer binder content	EN ISO 10582	Type I	
TECHNICAL CHARACTERISTICS			
Total thickness	EN ISO 24346	2.00 mm	3.00 mm
Total weight	EN ISO 23997	3400 g/m²	5400 g/m²
Wear layer thickness	EN ISO 24340	0.30 mm	
Bevelled edges		No	
Surface treatment (PUR)		Yes - TopClean	
Form of delivery	EN ISO 24342		
	Planks 229 x 1219 mm	12 planks/box = 3.34m²	8 planks/box = 2.23m²
		72 boxes/pallet = 240.48m²	72 boxes/pallet = 160.56m²
	Tiles 610x 305 mm	18 tiles/box = 3.34m²	12 tiles/box = 2.23m²
		64 boxes/pallet = 213.76m²	64 boxes/pallet = 142.72m²
	Tiles 457x 457 mm	12 tiles/box = 2.51m²	8 tiles/box = 1.67m²
80 boxes/pallet = 200.8m²		80 boxes/pallet = 133.76m²	

PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)			
Reaction to fire	EN 13501-1	Bfl-s1 glued over A2fl or A1fl substrate (concrete)	
Electrostatic properties	EN 1815	≤ 2.0 kV on concrete	
	EN 1081	R1 > 10 ¹⁰ Ω	
Thermal resistance	EN ISO 10456	0.07 m² K/W	
Slip resistance	EN 13893	μ ≥ 0.3	

TECHNICAL PERFORMANCES			
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm	
		Average measured value: 0.03 mm	
Impact sound reduction	NF EN ISO 717 / 2	ΔL _W 3 dB	
Slip resistance	DIN 51130	R9	
Furniture leg	EN 424	No damage	
Castor chair	EN ISO 4918	No damage	
Curl resultant to heat	EN ISO 23999	≤ 2 mm	
Light fastness	EN ISO 105-B02	≥ 6	
Dimensional stability	EN ISO 23999	≤ 0.25%	
Chemical resistance	EN ISO 26987	Good resistance	
Underfloor heating		Suitable – max. 27°C	

ENVIRONMENTAL PERFORMANCES			
Total VOC emissions	ISO 16000-9	≤100 µg/m³ (after 28 days)	

COLOURS			
Wood:37 / Stone:12 / Texture:19			

The above information is subject to modification for the benefit of further improvement (04/2025). For the latest information, please visit our website: www.Tarkett-Asia.com

Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



DESIGN	COLOR	FORMAT	iD ESSENTIAL 30(2MM)	iD ESSENTIAL MAX 30(3MM)
Cerused Oak (EIR)	Beige	1219 x 229 mm	24707009	256112009
Charm Oak (EIR)	Beige	1219 x 229 mm	24707012	256112012
Country Oak (EIR)	Beige	1219 x 229 mm	24707001	256112001
	Grey	1219 x 229 mm	24707003	256112003
	Natural	1219 x 229 mm	24707002	256112002
Aspen Oak	Beige	1219 x 229 mm	3977014	256106014
	Grey	1219 x 229 mm	3977013	256106013
	Natural	1219 x 229 mm	3977016	256106016
Beech	Natural	1219 x 229 mm	3977029	256106029
Delicate Oak	Beige	1219 x 229 mm	3977081	256106081
	Brown	1219 x 229 mm	3977082	256106082
	Light Beige	1219 x 229 mm	3977083	256106083
	Light Brown	1219 x 229 mm	3977080	256106080
Modern Oak	Beige	1219 x 229 mm	3977086	256106086
	Brown	1219 x 229 mm	3977088	256106088
	Light Beige	1219 x 229 mm	3977085	256106085
	Light Brown	1219 x 229 mm	3977087	256106087
	Natural	1219 x 229 mm	3977089	256106089
	White	1219 x 229 mm	3977084	256106084
Primary Pine	Natural	1219 x 229 mm	3977020	256106020
	White	1219 x 229 mm	3977021	256106021
Smoked Oak	Black	1219 x 229 mm	3977000	256106000
	Brown	1219 x 229 mm	3977001	256106001
	Light Grey	1219 x 229 mm	3977004	256106004
	Natural	1219 x 229 mm	3977002	256106002
	White	1219 x 229 mm	3977005	256106005
Soft Oak	Beige	1219 x 229 mm	3977009	256106009
	Brown	1219 x 229 mm	3977007	256106007
	Light Beige	1219 x 229 mm	3977015	256106015
	Light Brown	1219 x 229 mm	3977012	256106012
	Light Grey	1219 x 229 mm	3977010	256106010
	Natural	1219 x 229 mm	3977008	256106008
	White	1219 x 229 mm	3977011	256106011
Teak	Natural	1219 x 229 mm	3977031	256106031
Versailles Oak	Dark Brown	457 x 457 mm	276004012	256107012
	Light Brown	457 x 457 mm	276004011	256107011
Walnut	Light Brown	1219 x 229 mm	3977030	256106030
Breccia	Black	610 x 305 mm	3979022	256108022
	Light Grey	610 x 305 mm	3979021	256108021
Cement	Grey	610 x 305 mm	3979309	256108309
	Medium Dark	610 x 305 mm	3979312	256108312
Marble	Classic	610 x 305 mm	3979020	256108020
Original Slate	Black	610 x 305 mm	3979006	256108006
	Grey	610 x 305 mm	3979007	256108007
Sandstone	Black	610 x 305 mm	3979004	256108004
StoneArt	Medium Grey	610 x 305 mm	3979023	256108023
Terrazzo	Classic	610 x 305 mm	3979024	256108024
Venezia	Beige	610 x 305 mm	3979002	256108002
	Grey	610 x 305 mm	3979001	256108001
Abstract	Dark Grey	457 x 457 mm	276004013	256107013
	Light Grey	457 x 457 mm	276004014	256107014
	Steel Blue	457 x 457 mm	276004015	256107015
LineArt	Light Blue	457 x 457 mm	276004019	256107019
	Sand	457 x 457 mm	276004020	256107020
LineFlow	Blue	457 x 457 mm	276004018	256107018
	Light Grey	457 x 457 mm	276004016	256107016
	Medium Grey	457 x 457 mm	276004017	256107017
Linen	Brown	1219 x 229 mm	3977329	256106329
	Dark Blue	1219 x 229 mm	3977324	256106324
	Green	1219 x 229 mm	3977325	256106325
	Middle Blue	1219 x 229 mm	3977326	256106326
	Orange	1219 x 229 mm	3977327	256106327
	Red	1219 x 229 mm	3977328	256106328
Tisse	Pale Blue	1219 x 229 mm	3977330	256106330
	Pale Green	1219 x 229 mm	3977331	256106331
	Pale Orange	1219 x 229 mm	3977332	256106332
	Pale Yellow	1219 x 229 mm	3977333	256106333
	Yellow	1219 x 229 mm	3977334	256106334



www.tarkett-asia.com
Contact: saleshk@tarkett.com

