

Description

Heterogeneous indoor floorcovering, 3.45mm thick.

1: DANCER-APPROVED SURFACE FRICTION

Dancefloor is backed with an engineered surface texture providing optimal friction and light reflection

2: DYNAMIC COLOURS AND REALISTIC DECORS

High definition printing for higher colour intensity

3: OUTSTANDING DIMENSIONAL STABILITY < 0.10%:


Extremely tough single glass veil reinforcement

4: HIGH PERFORMANCE AND DURABILITY:

Homogeneous calendared sheet made from up to 60% recycled vinyl.

5: COMFORT, SAFETY AND BOOSTED SPORTS EXPERIENCE:

High-density closed-cell foam with engineered honeycomb backing.

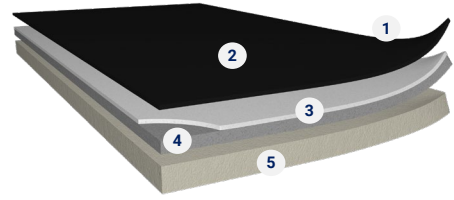

PROPERTIES	STANDARDS	DANCEFLOOR
------------	-----------	------------

DECLARATION OF PERFORMANCE

0120-081-DoP-2019-02

CLASSIFICATION

Type of floor covering	EN 14041	Heterogeneous indoor floorcoverings
------------------------	----------	-------------------------------------

TECHNICAL CHARACTERISTICS

Total thickness	ISO 24346 (EN 428)	3.45mm
Total weight	ISO 23997 (EN 430)	3040g/m ²
Width	ISO 24341 (EN 426)	2m
Length	ISO 24341 (EN 426)	15lm

REQUIREMENTS FOR SAFE USE

Friction	EN 13036-4	≥90
Shock absorption	EN 14808	≥4%
Vertical deformation	EN 14809	≤0.8mm
Specular gloss	EN ISO 2813	≤30

TECHNICAL PERFORMANCES

Vertical ball behaviour	EN 12235	-
Reaction to fire	EN 13501-1	Cfl-s1*
Resistance to wear	EN ISO 5470-1	≤1g
Resistance to indentation	Average measured value	≤0.18mm
	EN 1516	≤0.50mm
Resistance to a rolling load	EN 1569	-
In room noise	NFS-074	Class A ≤65dB
Thermal resistance	EN ISO 14456	Approx. 0.05 m ² K/W Compatible with underfloor heating

Colors available



* glued installation on concrete

** for non permanent installations 5 years warranty

Installation and maintenance guides available on request

Technical data in force as from the date of publication (03/2021).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.