



Somplan 500 306004 013

Somplan 500

TECHNICAL DATA	STANDARD	SOMPLAN 500
CLASSIFICATION		
Homogeneous Compact Vinyl Floorcovering	ISO 10581	Homogeneous compact Vinyl floorcovering
Classification	ISO 10874	Classes:
	Commercial	34
	Industrial	43
TECHNICAL CHARACTERISTICS		
Total thickness	ISO 24346	2.0mm
Dimension - Length	ISO 24341	231m
Dimension - Width	ISO 24341	2m
Total weight	ISO 23997	2900g/m²
Surface treatment		PUR
Binder content	ISO 10581	Type I
TECHNICAL PERFORMANCES		
Dimensional stability	ISO 23999	≤ 0.40% (Rolls)
Curl resistance to heat	ISO 23999	≤ 8.00mm
Reaction to fire	EN 13501-1	Bfl-s1
Residual indentation	ISO 24343-1 measured value	0.03mm
	Required value	≤ 0.10mm
Castor chair test	ISO 4918 - EN 425	No damage
Thermal resistance	EN ISO 10456	Approx 0.04 (m²·K)/W
Light fastness	ISO 105 B02	≥ 6
Chemical resistance	ISO 26987	Good resistance
Slip resistance	DIN 51130	R9
Static electrical charge	EN 13893	µ± 0.3
	EN 1815	≤ 2kV
Bacteria resistance	ISO 846-C	Doesn't favour growth
Flexibility	ISO 24344	20mm- No crack
ENVIRONMENT		
TVOC 28 days AgBB test	ISO 16000	< 10ug/m³
Recyclable		100%
Plasticizer		Phthalate-free technology


The above information is subject to modification for the benefit of further improvement.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



www.tarkett-asia.com
Contact: saleshk@tarkett.com



Somplan 500

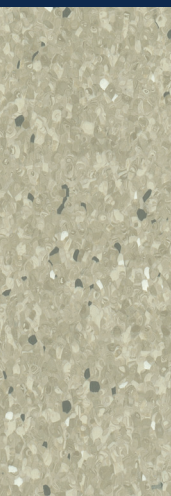

Somplan 500

HOMOGENEOUS COMPACT VINYL FLOORCOVERING

A unique 3D
effect solution
for heavy-
traffic areas




HOMOGENEOUS COMPACT
VINYL FLOORCOVERING


PANTONE BLUE NAVY 540C

Somplan 500
Size: 998.5 x 310 mm


Somplan 500

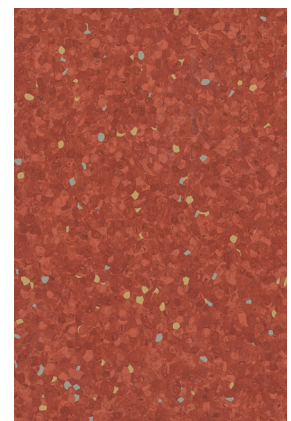


© 306004 030

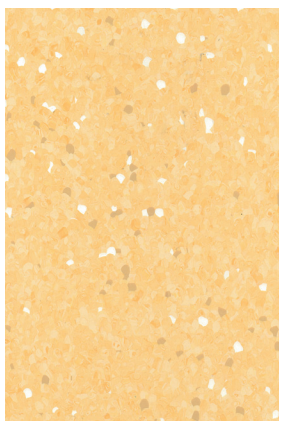


© 306004 016

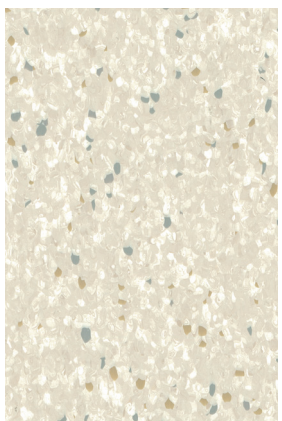


© 306004 009

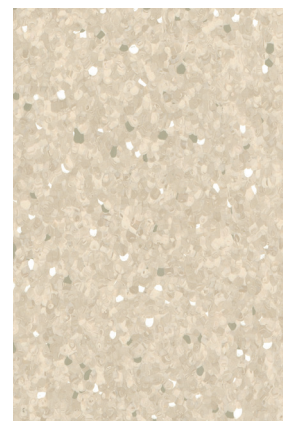

© 306004 013

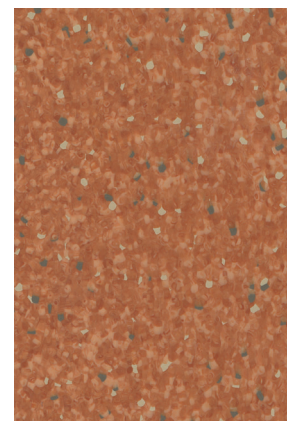


© 306004 019

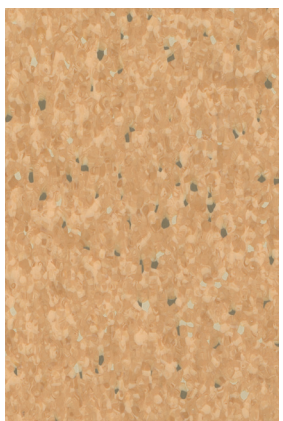


© 306004 018




© 306004 010

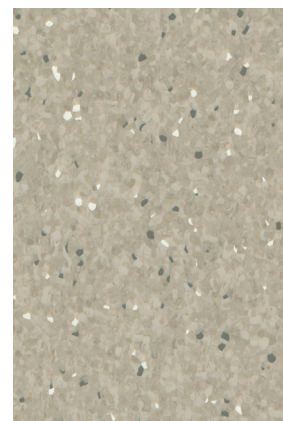

© 306004 014

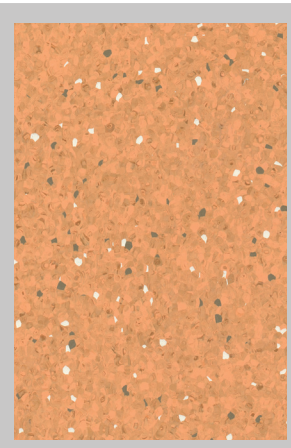


© 306004 017*

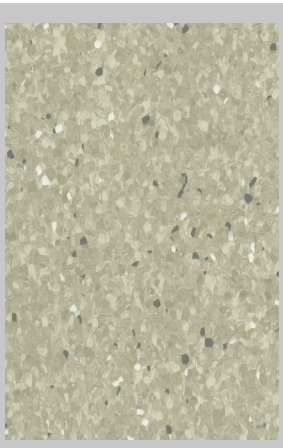

© 306004 012*



© 306004 011

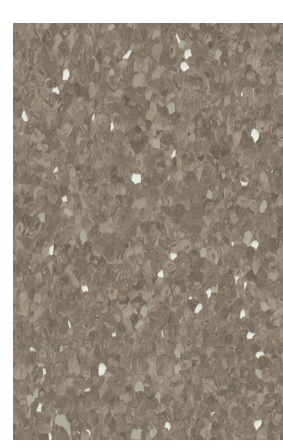


© 306004 015



© 306004 029*


*Made to order, no samples available.

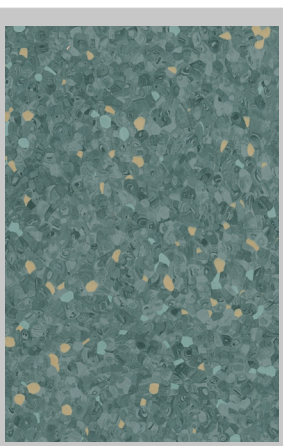

© 306004 025*




Somplan 500 306004 018

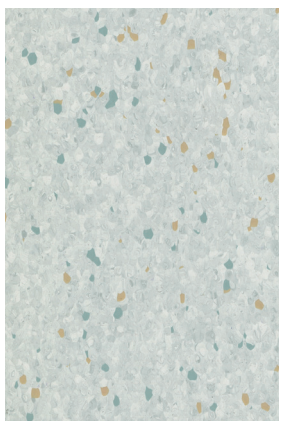


© 306004 023




© 306004 001

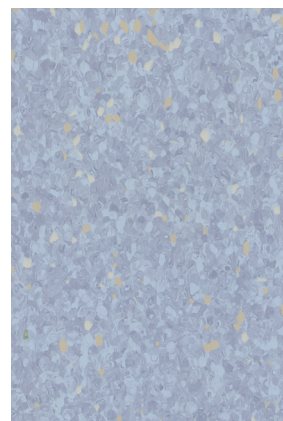


© 306004 020

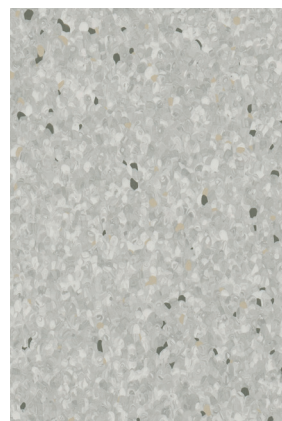


© 306004 002

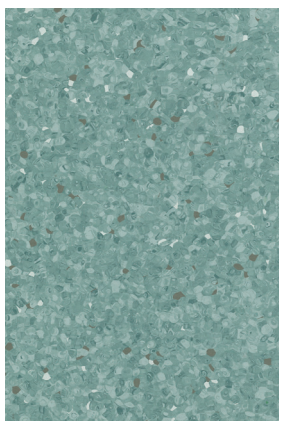


© 306004 024

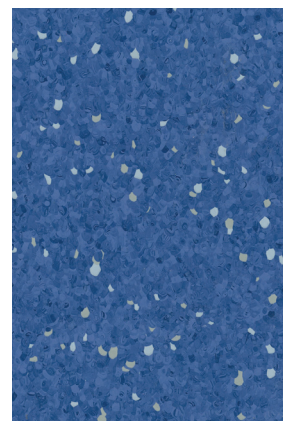


© 306004 022

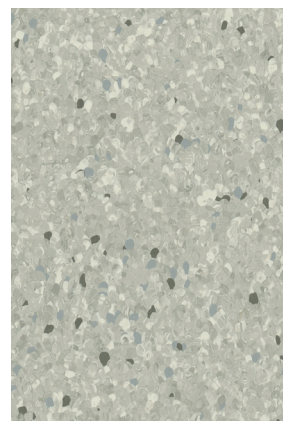


© 306004 004

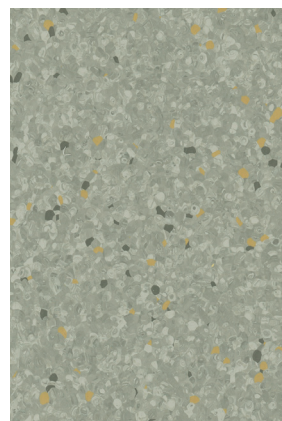


© 306004 005

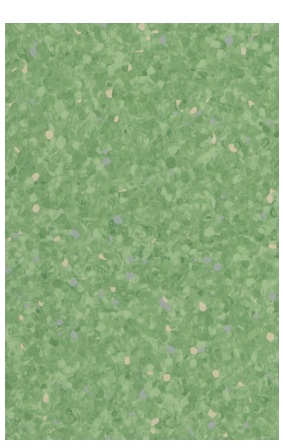


© 306004 027

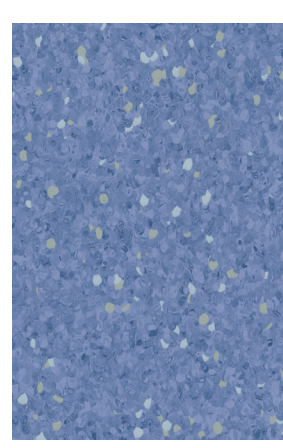


© 306004 021

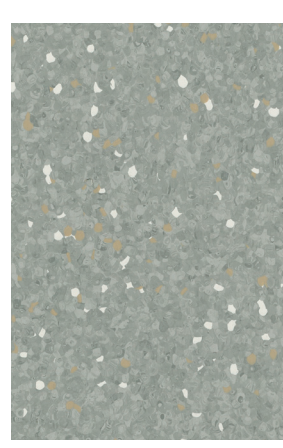


© 306004 003

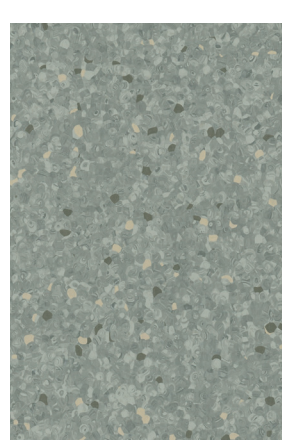

© 306004 007

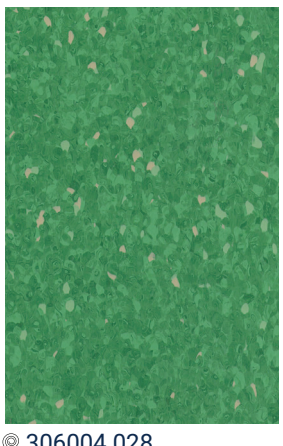


© 306004 028

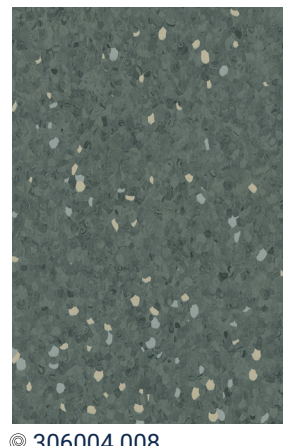

© 306004 008



© 306004 006

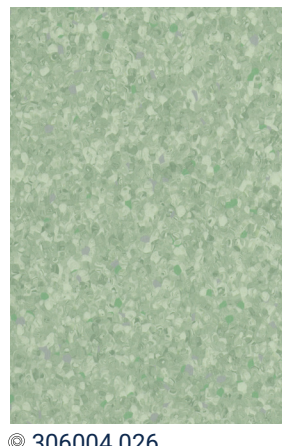

© 306004 026

Tarkett

PANTONE BLUE NAVY 540C C M Y K

Somplan 500
Size: 998.5 x 310 mm



HIGH QUALITY HOMOGENEOUS VINYL FLOORING

Somplan 500 is a homogeneous vinyl floorcovering with a non-directional pattern combined with 3D-effect chips for an attractive design. It is suitable for heavy traffic in premises such as schools, healthcare facilities, education, transportation, shopping malls, factories and other commercial areas.

Key features:

- High resistance to soils, stains, chemicals, scratches, scuffs and abrasions
- Phthalate-free and extremely low VOC emissions for the users' health and safety
- Superior PUR treatment enabling easy maintenance and minimized cleaning time
- Through pattern construction for the best durability and abrasion resistance
- Non-directional design, with 3D chips for an extraordinary deep pattern, available in 30 trendy colours

Somplan 500 306004 002 / 306004 008